

**SPLIT TYPE**  
**ROOM AIR CONDITIONER**  
  
**CEILING WALL** type

| Models | Indoor unit | Outdoor unit |
|--------|-------------|--------------|
|        | RJ-18FA     | RO-18FA      |
|        | RJ-18FB     | RO-18FB      |
|        | RJ-18UA     | RO-18UA      |
|        | RJ-18UB     | RO-18UB      |
|        | RJ-24FB     | RO-24FB      |
|        | RJ-24UB     | RO-24UB      |
|        | RJ-30FB     | RO-30FB      |
|        | RJ-30UB     | RO-30UB      |

**C O N T E N T S**

|                                               |    |
|-----------------------------------------------|----|
| SPECIFICATIONS .....                          | 1  |
| OUTLINE AND DIMENSIONS .....                  | 3  |
| REFRIGERANT SYSTEM DIAGRAM .....              | 5  |
| CIRCUIT DIAGRAM .....                         | 8  |
| ERROR DISPLAY .....                           | 13 |
| PCB CIRCUIT DIAGRAM .....                     | 14 |
| DISASSEMBLY ILLUSTRATION (Indoor Unit) .....  | 16 |
| DISASSEMBLY ILLUSTRATION (Outdoor Unit) ..... | 26 |
| PARTS LIST (Indoor Unit) .....                | 37 |
| PARTS LIST (Outdoor Unit) .....               | 41 |

# SPECIFICATIONS

|                       |                |                |                |                |
|-----------------------|----------------|----------------|----------------|----------------|
| TYPE                  | Cool           |                |                |                |
| INDOOR UNIT           | <b>RJ-18FA</b> | <b>RJ-18FB</b> | <b>RJ-24FB</b> | <b>RJ-30FB</b> |
| OUTDOOR UNIT          | <b>RO-18FA</b> | <b>RO-18FB</b> | <b>RO-24FB</b> | <b>RO-30FB</b> |
| COOLING CAPACITY (kW) | 5.40           |                | 6.80           | 7.90           |

## ELECTRICAL DATA

|                            |      |      |      |      |
|----------------------------|------|------|------|------|
| POWER SOURCE (V)           | 230  |      |      |      |
| FREQUENCY (Hz)             | 50   |      |      |      |
| RUNNING CURRENT (A)        | 7.3  | 8.5  | 10.6 | 13.0 |
| INPUT WATTS (kW)           | 1.66 | 1.90 | 2.40 | 2.75 |
| E.E.R. (kW/kW)             | 3.25 | 2.84 | 2.83 | 2.87 |
| MOISTURE REMOVAL (ℓ/hr)    | 2.0  |      | 2.5  | 3.0  |
| AIR CIRCULATION-Hi (m³/hr) | 900  | 760  | 900  | 950  |

## COMPRESSOR

|                       |                                                                                               |           |           |           |
|-----------------------|-----------------------------------------------------------------------------------------------|-----------|-----------|-----------|
| TYPE                  | Hermetic type, Deposit electrode condenser, 2 poles.<br>Single phase, Induction motor, Rotary |           |           |           |
| CODE                  | 5KS205DAB                                                                                     | 5KS225DAC | 5JS290DAA | 5JS315DAD |
| REFRIGERANT R410A (g) | 1,450                                                                                         | 900       | 1,550     | 2,300     |

## FAN MOTOR

|                  |                    |           |       |            |
|------------------|--------------------|-----------|-------|------------|
| POWER SOURCE (V) | 230                |           |       |            |
| INDOOR UNIT      | TYPE               | MFD-30HO  |       |            |
|                  | HI-SPEED (r.p.m.)  | 1,300     | 1,150 | 1,300      |
|                  | MED-SPEED (r.p.m.) | 1,120     | 1,030 | 1,160      |
|                  | LO-SPEED (r.p.m.)  | 930       | 930   | 1,020      |
| OUTDOOR UNIT     | TYPE               | MFB-24JTT |       | MFB-30NTAT |
|                  | HI-SPEED (r.p.m.)  | 780       |       | 730        |
|                  | LO-SPEED (r.p.m.)  | -----     |       | 450        |

## DIMENSIONS

|                            |                   |  |                 |
|----------------------------|-------------------|--|-----------------|
| INDOOR UNIT H x W x D (mm) | 270 x 1,150 x 285 |  |                 |
| OUTDOOR UNIT               | 650 x 830 x 320   |  | 900 x 900 x 350 |

## WEIGHT

|                              |         |         |         |         |
|------------------------------|---------|---------|---------|---------|
| INDOOR UNIT GROSS / NET (kg) | 22 / 16 |         |         |         |
| OUTDOOR UNIT                 | 55 / 51 | 51 / 47 | 62 / 58 | 85 / 73 |

## REFRIGERANT CHARGE (R410A)

| PIPE LENGTH           |         | 7.5 m<br>(25 ft)    | 10 m<br>(33 ft)     | 15 m<br>(49 ft)     | 20 m<br>(66 ft)     | 25 m<br>(82 ft)     | 30 m<br>(98 ft)     | Additional<br>refrigerant                |
|-----------------------|---------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|------------------------------------------|
| FULL CHARGE<br>AMOUNT | RJ-18FA | 1,450 g<br>(51.1oz) | 1,500 g<br>(54.6oz) | 1,600 g<br>(56.4oz) | 1,700 g<br>(60.0oz) | -                   | -                   | 20g (0.71oz) / 1m( 3.3ft)<br>(over 7.5m) |
|                       | RJ-18FB | 900 g<br>(31.8oz)   | 950 g<br>(33.5oz)   | 1,050 g<br>(37.0oz) | 1,150 g<br>(40.6oz) | -                   | -                   |                                          |
|                       | RJ-24FB | 1,550 g<br>(54.7oz) | 1,600 g<br>(56.4oz) | 1,700 g<br>(60.0oz) | 1,800 g<br>(63.5oz) | -                   | -                   |                                          |
|                       | RJ-30FB | 2,300 g<br>(81.1oz) | 2,350 g<br>(82.9oz) | 2,450 g<br>(86.4oz) | 2,550 g<br>(89.9oz) | 2,650 g<br>(93.5oz) | 2,750 g<br>(97.0oz) |                                          |

| TYPE             |      | Cool and Heat  |                |                |                |
|------------------|------|----------------|----------------|----------------|----------------|
| INDOOR UNIT      |      | <b>RJ-18UA</b> | <b>RJ-18UB</b> | <b>RJ-24UB</b> | <b>RJ-30UB</b> |
| OUTDOOR UNIT     |      | <b>RO-18UA</b> | <b>RO-18UB</b> | <b>RO-24UB</b> | <b>RO-30UB</b> |
| COOLING CAPACITY | (kW) | 5.40           |                | 6.80           | 7.90           |
| HEATING CAPACITY | (kW) | 5.70           |                | 7.40           | 8.40           |

#### ELECTRICAL DATA

|                        |          |      |      |      |      |
|------------------------|----------|------|------|------|------|
| POWER SOURCE           | (V)      | 230  |      |      |      |
| FREQUENCY              | (Hz)     | 50   |      |      |      |
| RUNNING CURRENT (Cool) | (A)      | 7.3  | 8.3  | 10.6 | 13.0 |
| RUNNING CURRENT (Heat) | (A)      | 7.0  | 8.3  | 10.5 | 13.0 |
| INPUT WATTS (Cool)     | (kW)     | 1.66 | 1.85 | 2.40 | 2.75 |
| INPUT WATTS (Heat)     | (kW)     | 1.58 | 1.85 | 2.40 | 2.75 |
| E.E.R. (Cool)          | (kW/kW)  | 3.25 | 2.92 | 2.83 | 2.87 |
| E.E.R. (Heat)          | (kW/kW)  | 3.61 | 3.08 | 3.08 | 3.05 |
| MOISTURE REMOVAL       | ( ℓ /hr) | 2.0  |      | 2.5  | 3.0  |
| AIR CIRCULATION-Hi     | (m³/hr)  | 900  | 760  | 900  | 950  |

#### COMPRESSOR

|             |           |                                                                                               |           |           |           |
|-------------|-----------|-----------------------------------------------------------------------------------------------|-----------|-----------|-----------|
| TYPE        |           | Hermetic type, Deposit electrode condenser, 2 poles.<br>Single phase, Induction motor, Rotary |           |           |           |
| CODE        |           | 5KS205DAB                                                                                     | 5KS225DAC | 5JS290DAA | 5JS315DAD |
| REFRIGERANT | R410A (g) | 1,550                                                                                         | 1,550     | 1,700     | 2,300     |

#### FAN MOTOR

|              |                    |            |       |       |            |
|--------------|--------------------|------------|-------|-------|------------|
| POWER SOURCE |                    | 230        |       |       |            |
| INDOOR UNIT  | TYPE               | MFD-30HO   |       |       |            |
|              | HI-SPEED (r.p.m.)  | 1,300      | 1,150 | 1,300 | 1,380      |
|              | MED-SPEED (r.p.m.) | 1,120      | 1,030 | 1,160 | 1,280      |
|              | LO-SPEED (r.p.m.)  | 930        |       | 1,020 | 1,180      |
| OUTDOOR UNIT | TYPE               | MFB-24JTBT |       |       | MFB-30NTAT |
|              | HI- SPEED (r.p.m.) | 780        |       |       | 730        |
|              | LO-SPEED (r.p.m.)  | 400        |       |       | 450        |

#### DIMENSIONS

|              |                |                   |  |  |                 |
|--------------|----------------|-------------------|--|--|-----------------|
| INDOOR UNIT  | H x W x D (mm) | 270 x 1,150 x 285 |  |  |                 |
| OUTDOOR UNIT | H x W x D (mm) | 650 x 830 x 320   |  |  | 900 x 900 x 350 |

#### WEIGHT

|              |                  |         |  |         |         |
|--------------|------------------|---------|--|---------|---------|
| INDOOR UNIT  | GROSS / NET (kg) | 22 / 16 |  |         |         |
| OUTDOOR UNIT | GROSS / NET (kg) | 56 / 52 |  | 63 / 59 | 86 / 74 |

#### REFRIGERANT CHARGE (R410A)

| PIPE LENGTH           |         | 7.5 m<br>(25 ft)    | 10 m<br>(33 ft)     | 15 m<br>(49 ft)     | 20 m<br>(66 ft)     | 25 m<br>(82 ft)      | Additional<br>refrigerant                |
|-----------------------|---------|---------------------|---------------------|---------------------|---------------------|----------------------|------------------------------------------|
| FULL CHARGE<br>AMOUNT | RJ-18UA | 1,550 g<br>(54.7oz) | 1,600 g<br>(56.4oz) | 1,700 g<br>(60.0oz) | 1,800 g<br>(63.5oz) | -                    | 20g (0.71oz) / 1m( 3.3ft)<br>(over 7.5m) |
|                       | RJ-18UB | 1,550 g<br>(54.7oz) | 1,600 g<br>(56.4oz) | 1,700 g<br>(60.0oz) | 1,800 g<br>(63.5oz) | -                    |                                          |
|                       | RJ-24UB | 1,700 g<br>(60.0oz) | 1,800 g<br>(63.5oz) | 2,000 g<br>(70.6oz) | 2,200 g<br>(77.6oz) | -                    | 40g (1.42oz) / 1m( 3.3ft)<br>(over 7.5m) |
|                       | RJ-30UB | 2,300 g<br>(81.1oz) | 2,400 g<br>(84.7oz) | 2,600 g<br>(91.7oz) | 2,800 g<br>(98.8oz) | 3,000 g<br>(105.8oz) |                                          |


# OUTLINE AND DIMENSIONS

Unit : mm

## INDOOR UNIT

Models : RJ-18FA  
RJ-18FB  
RJ-18UA  
RJ-18UB  
RJ-24FB  
RJ-24UB  
RJ-30FB  
RJ-30UB

---


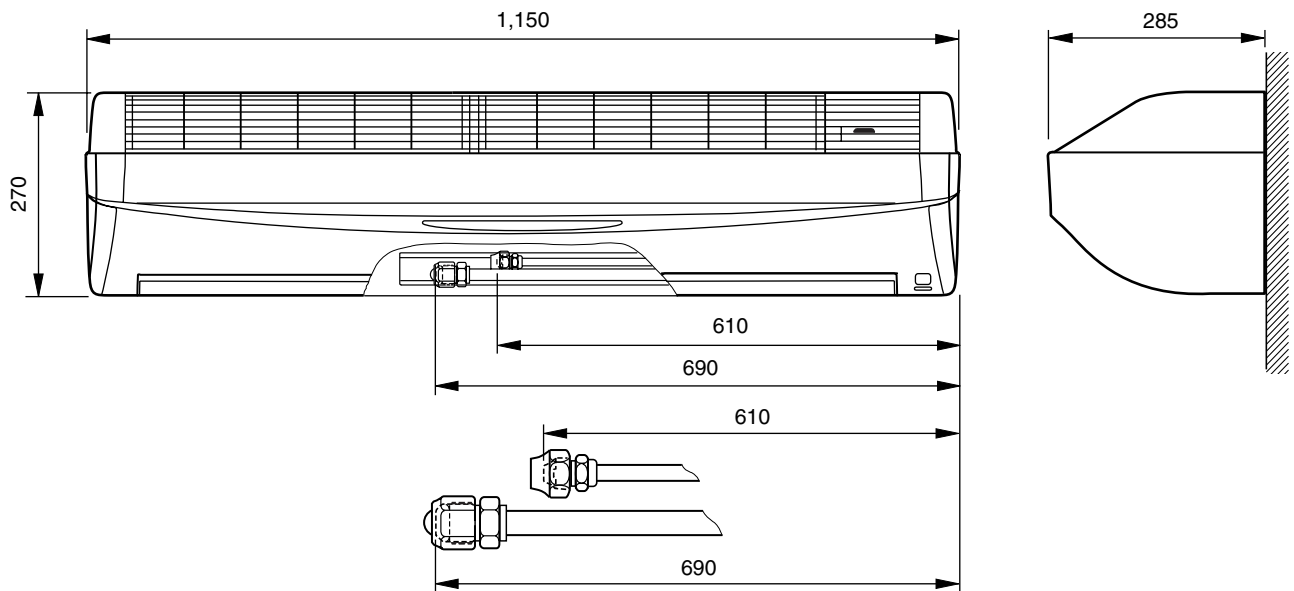


## OUTDOOR UNIT

Unit : mm


**Models :** RO-18FA  
RO-18FB  
RO-18UA  
RO-18UB  
RO-24FB  
RO-24UB

---

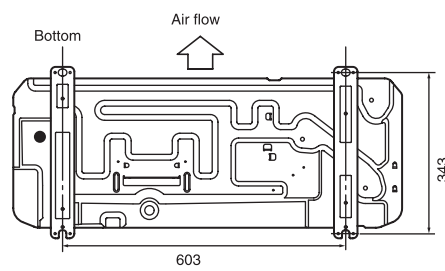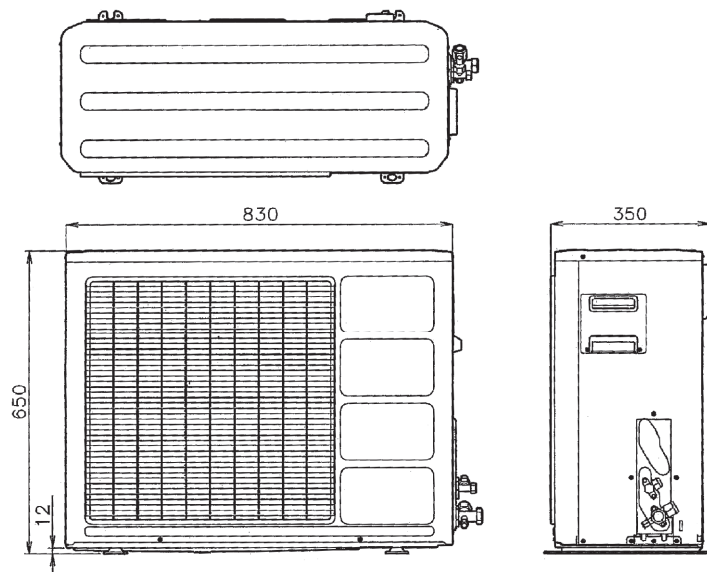


**Models :** RO-30FB  
RO-30UB

---

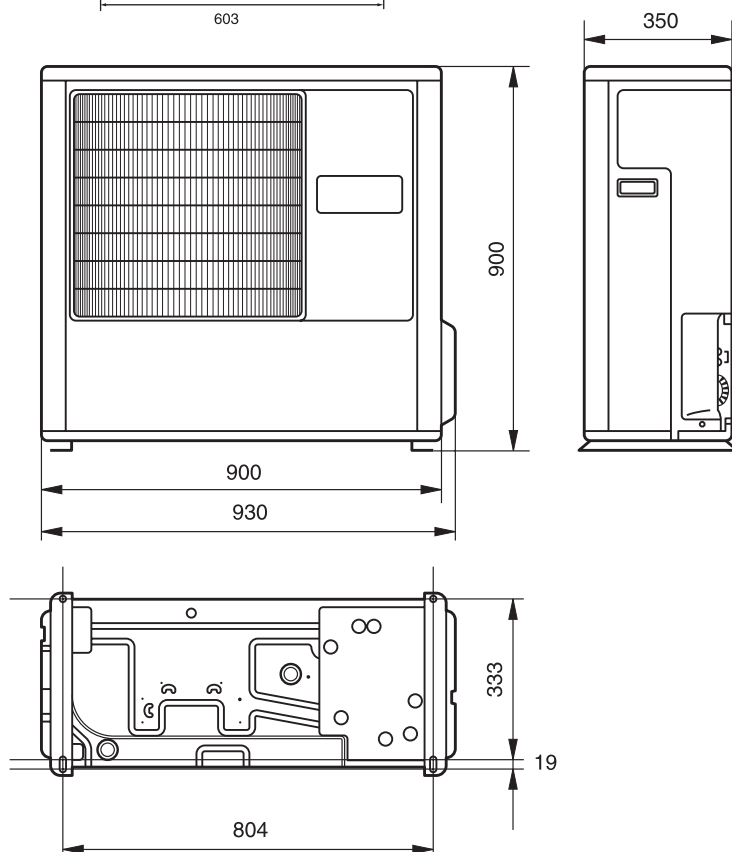


# REFRIGERANT SYSTEM DIAGRAM


**Models : RJ-18FA / RO-18FA  
RJ-18FB / RO-18FB**

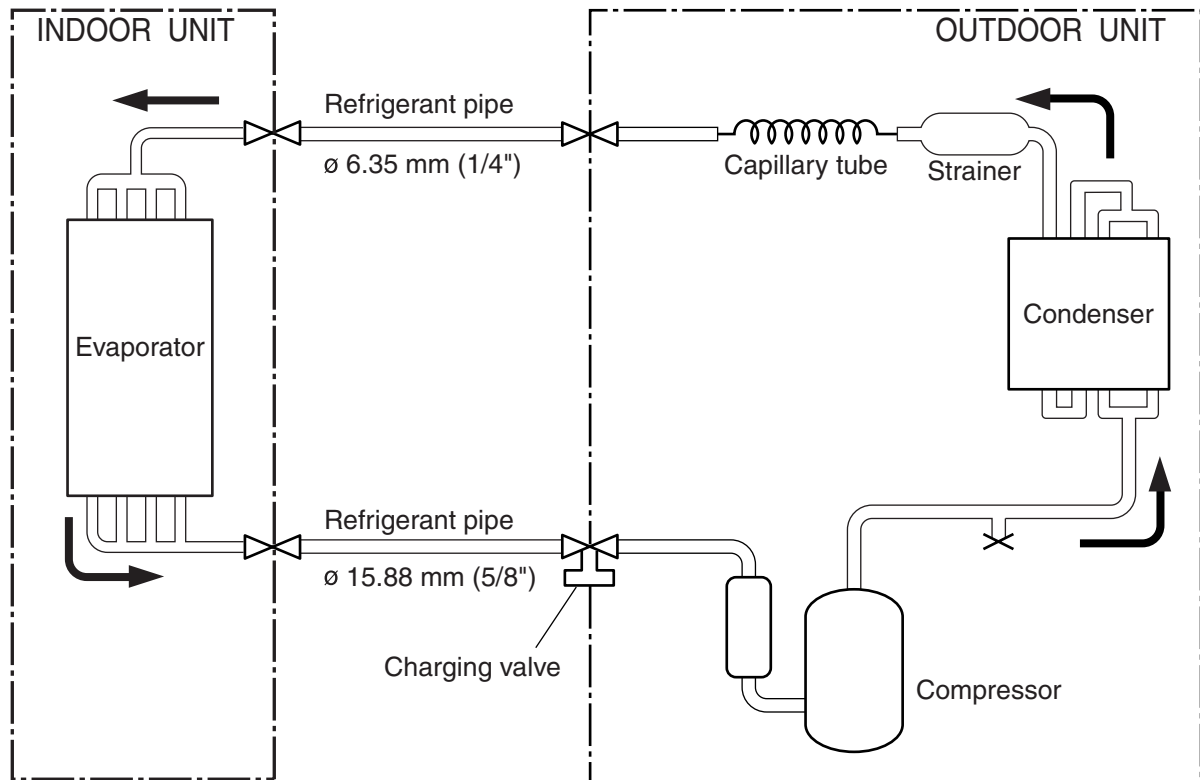



**Models : RJ-24FB / RO-24FB**

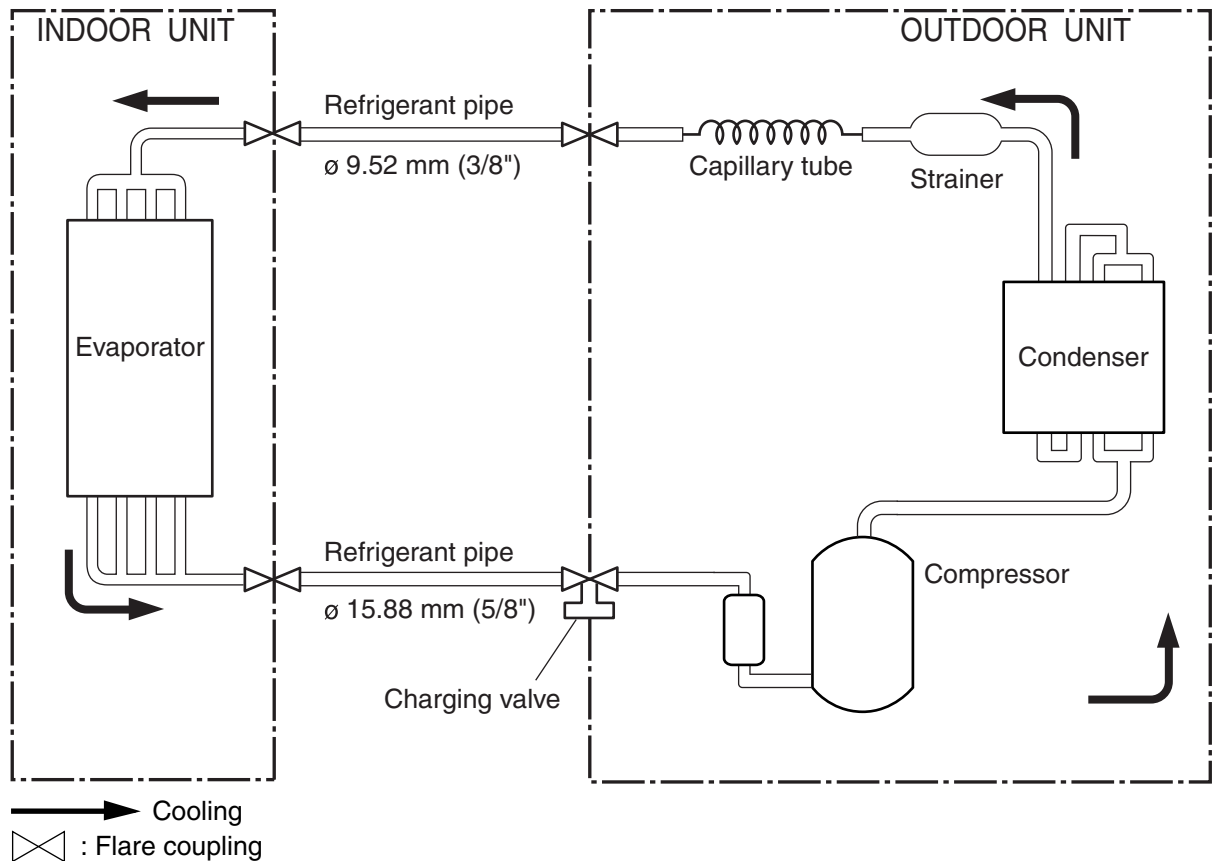


**Models : RJ-18UA / RO-18UA  
RJ-18UB / RO-18UB**

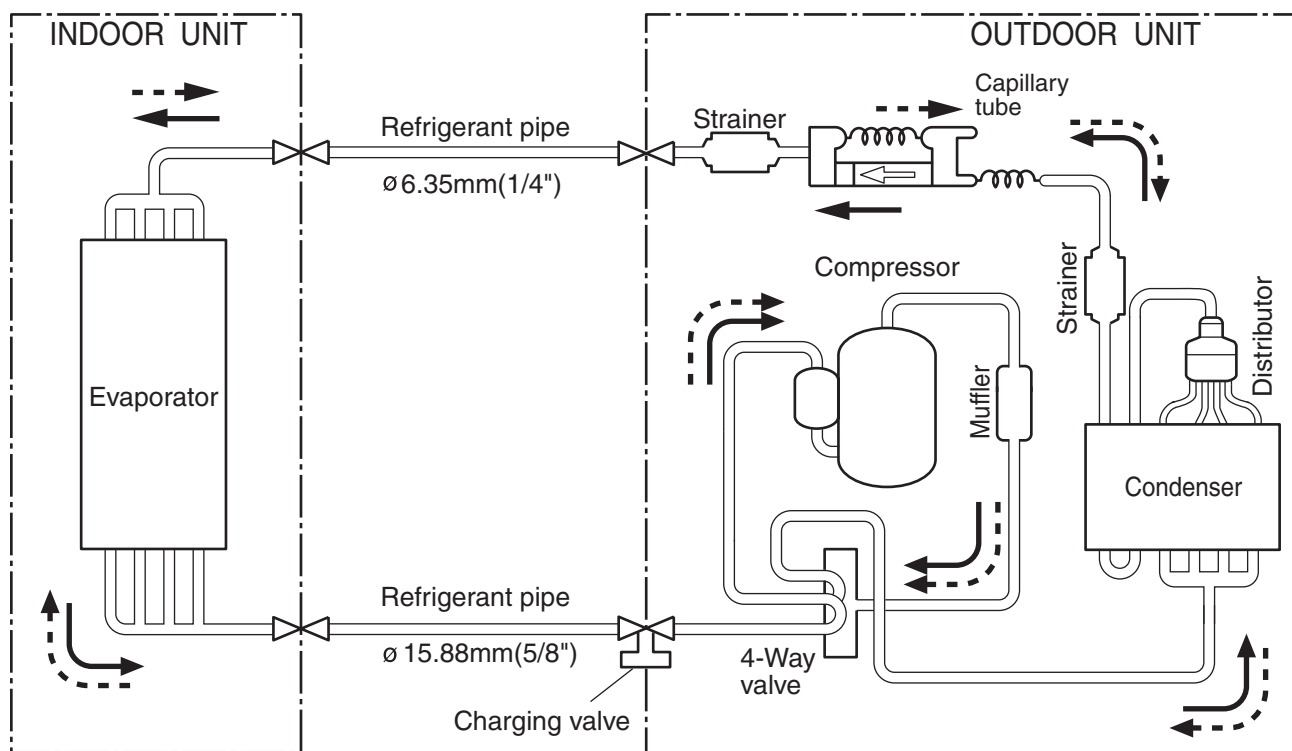


**Models : RJ-24UB / RO-24UB**

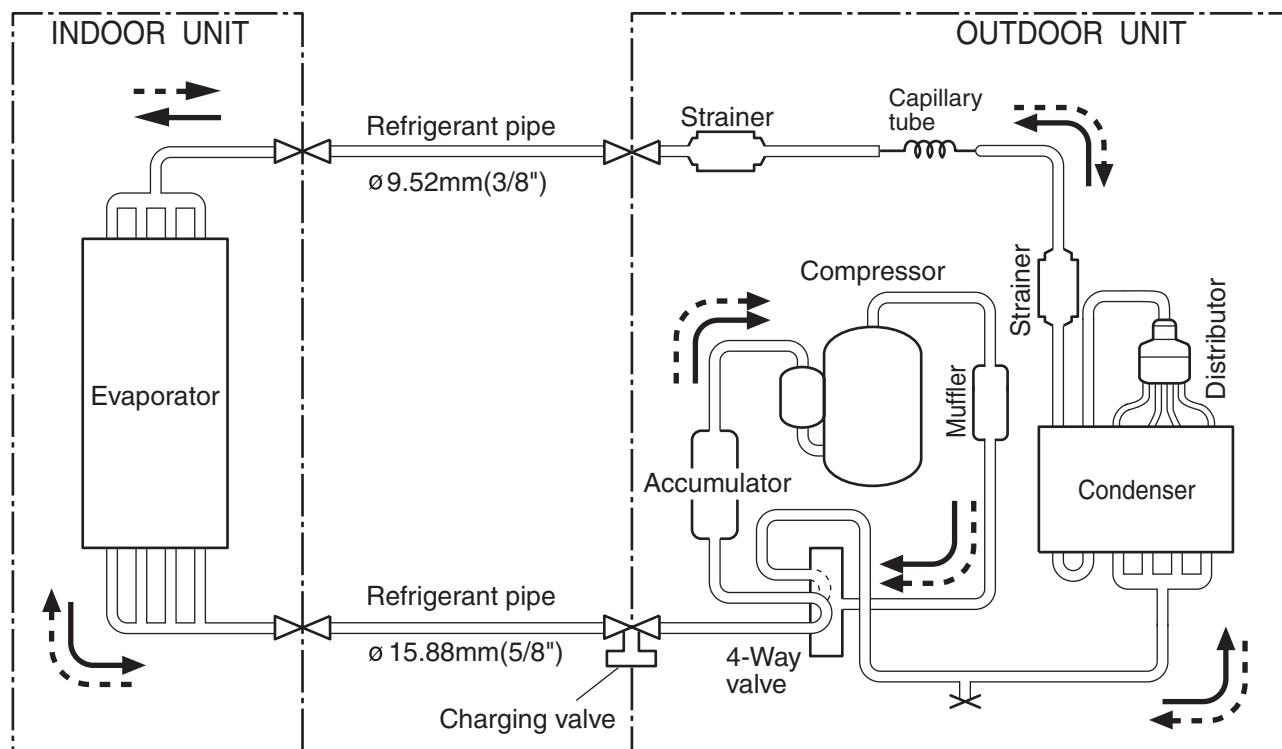

**Models : RJ-30FB / RO-30FB**

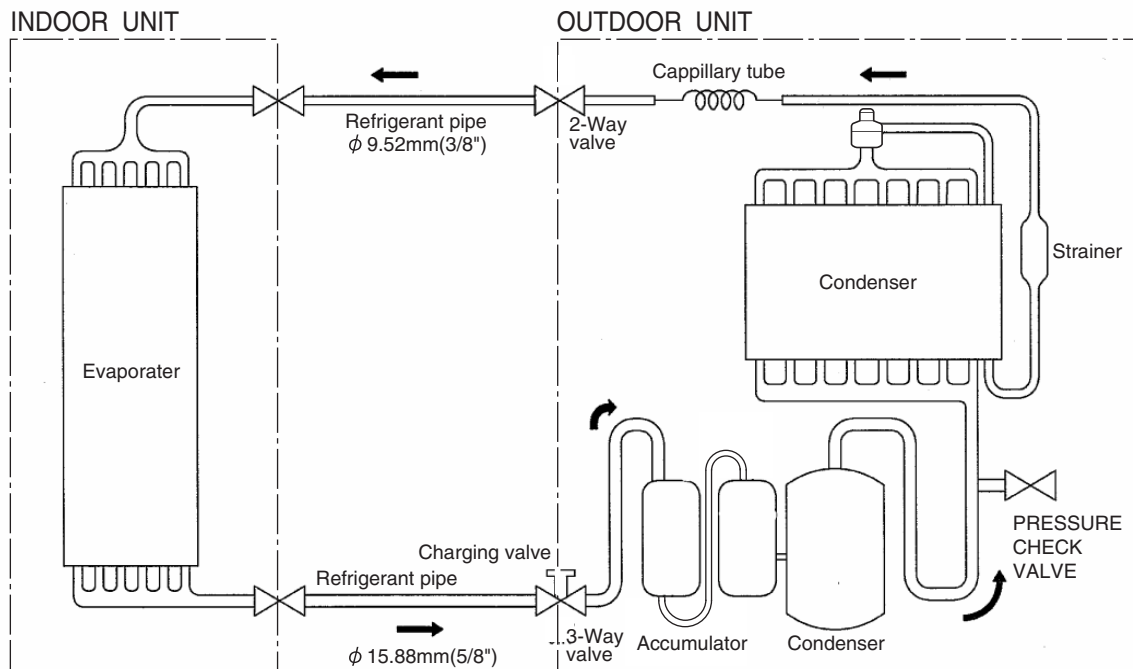


**Models : RJ-30UB / RO-30UB**

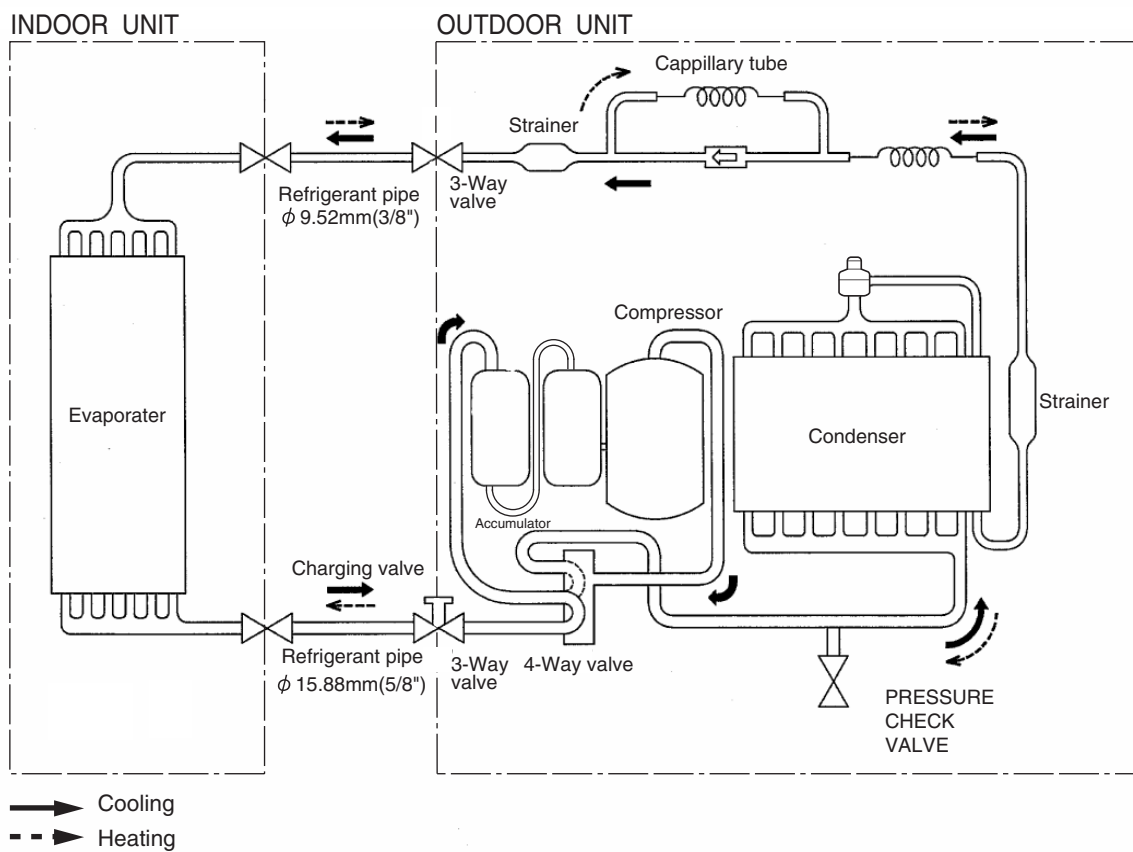


# CIRCUIT DIAGRAM

Models : RJ-18FA / RO-18FA  
RJ-18FB / RO-18FB  
RJ-24FB / RO-24FB

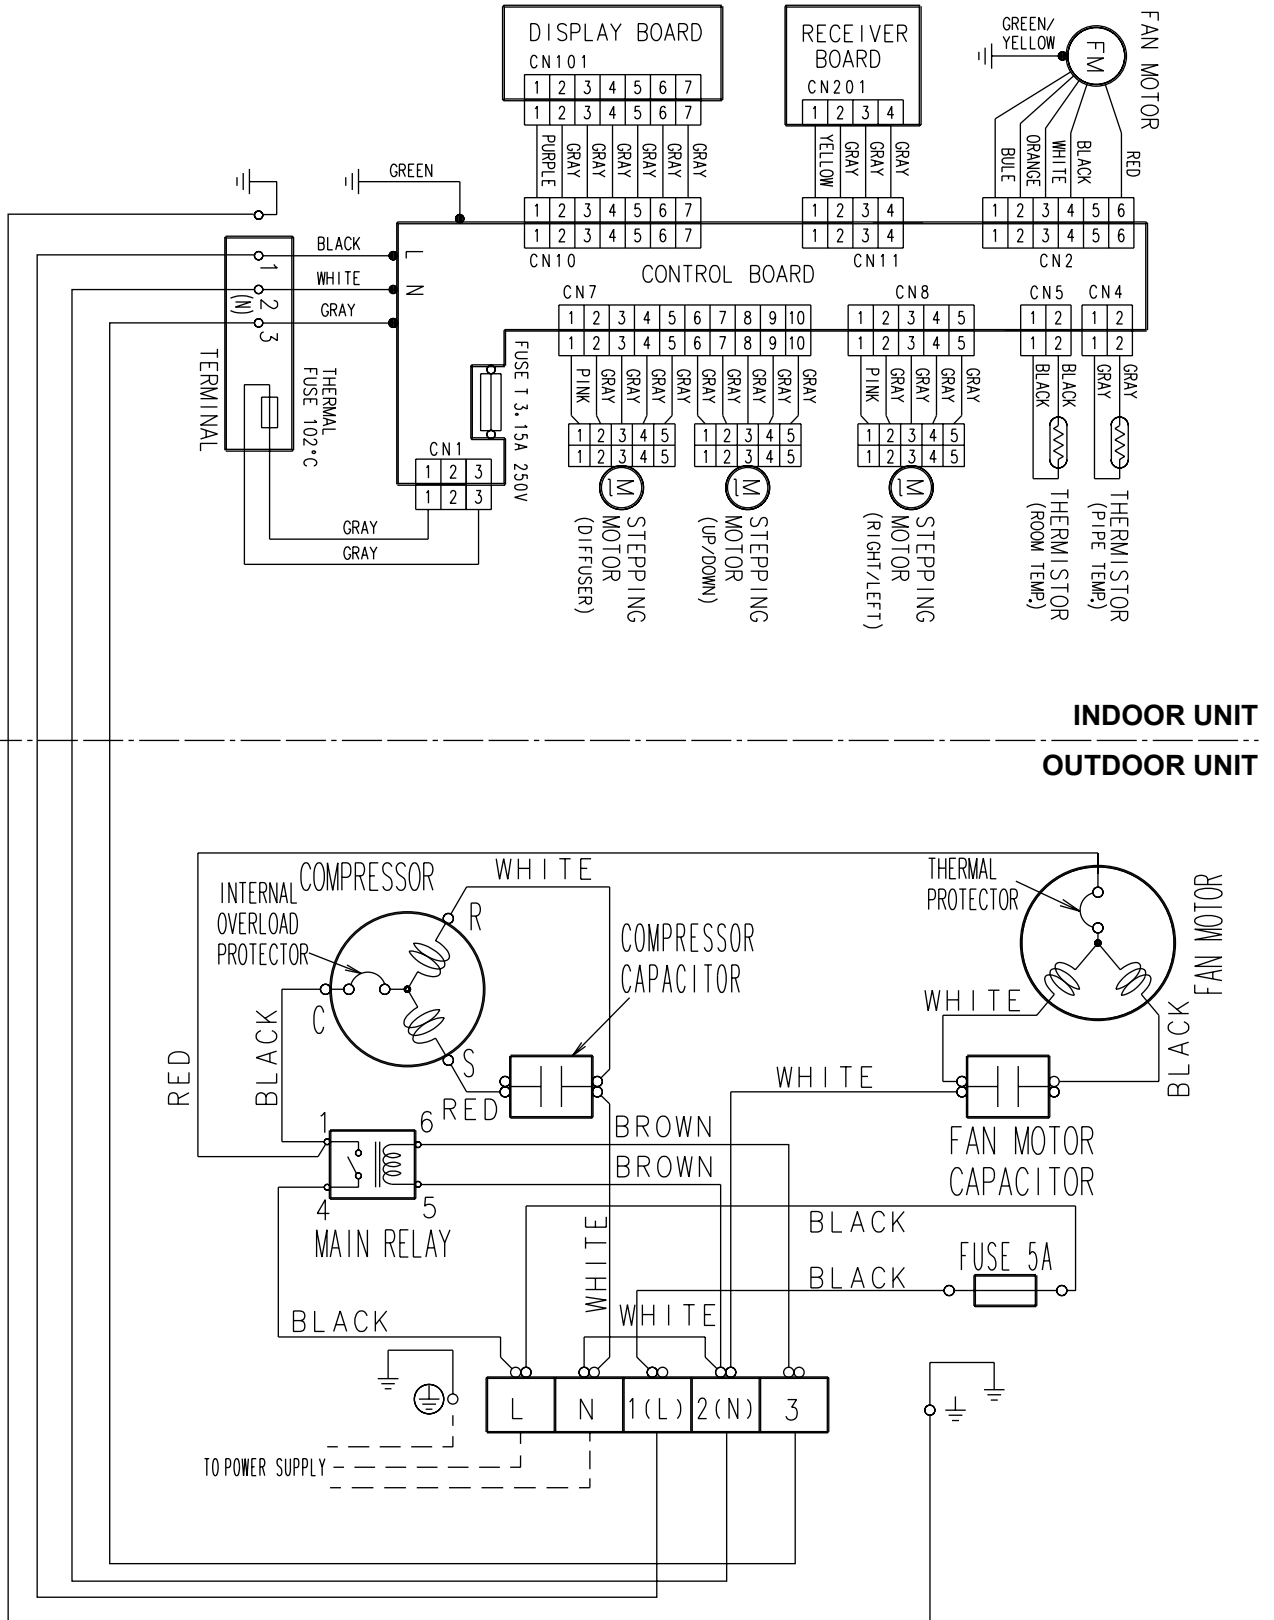


**Models : RJ-18UA / RO-18UA**

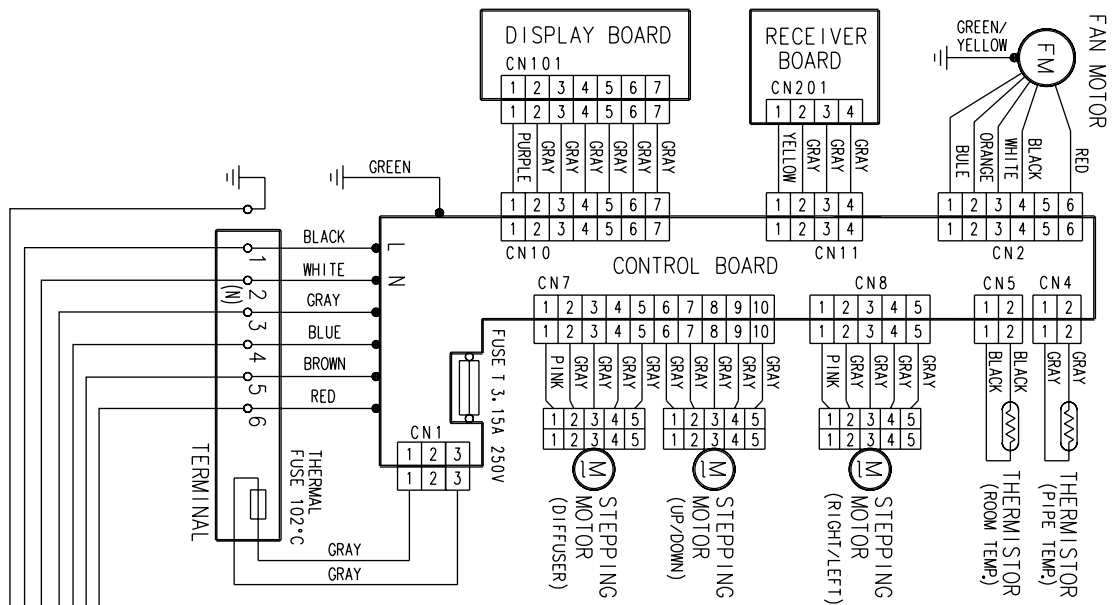



**INDOOR UNIT**

**OUTDOOR UNIT**

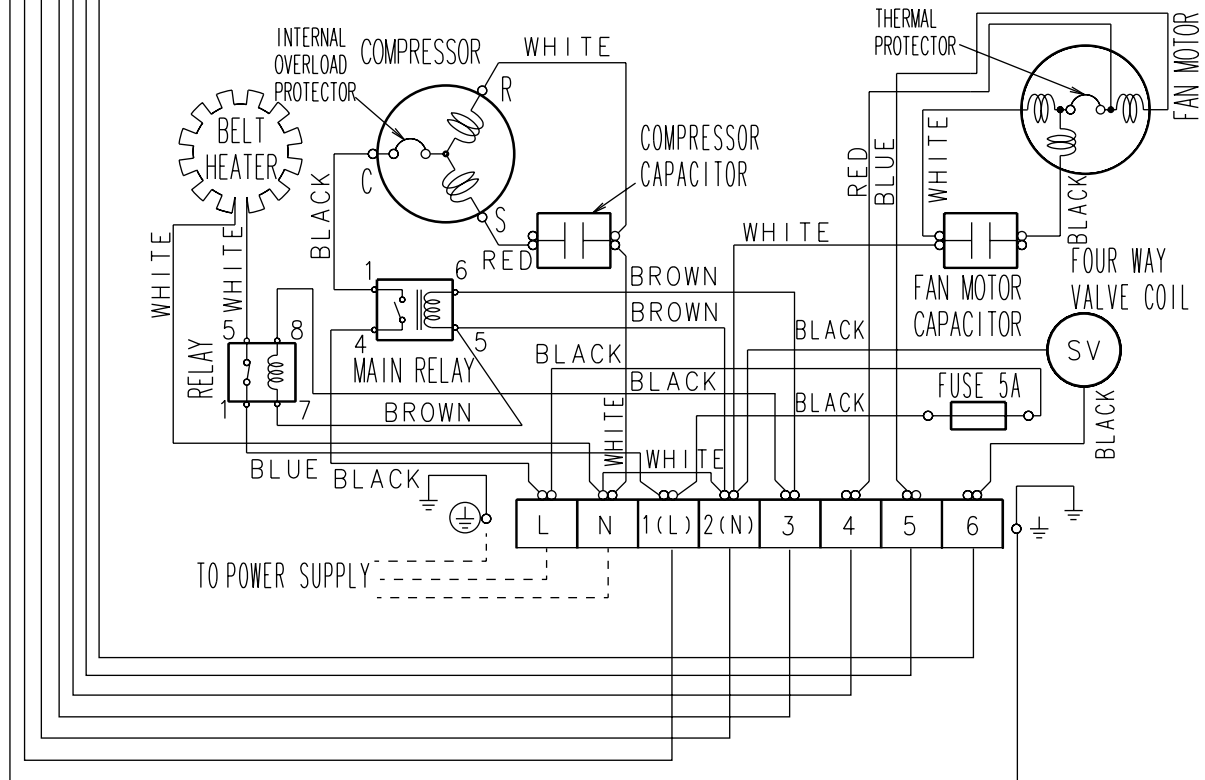



**Models : RJ-18UB / RO-18UB  
RJ-24UB / RO-24UB**

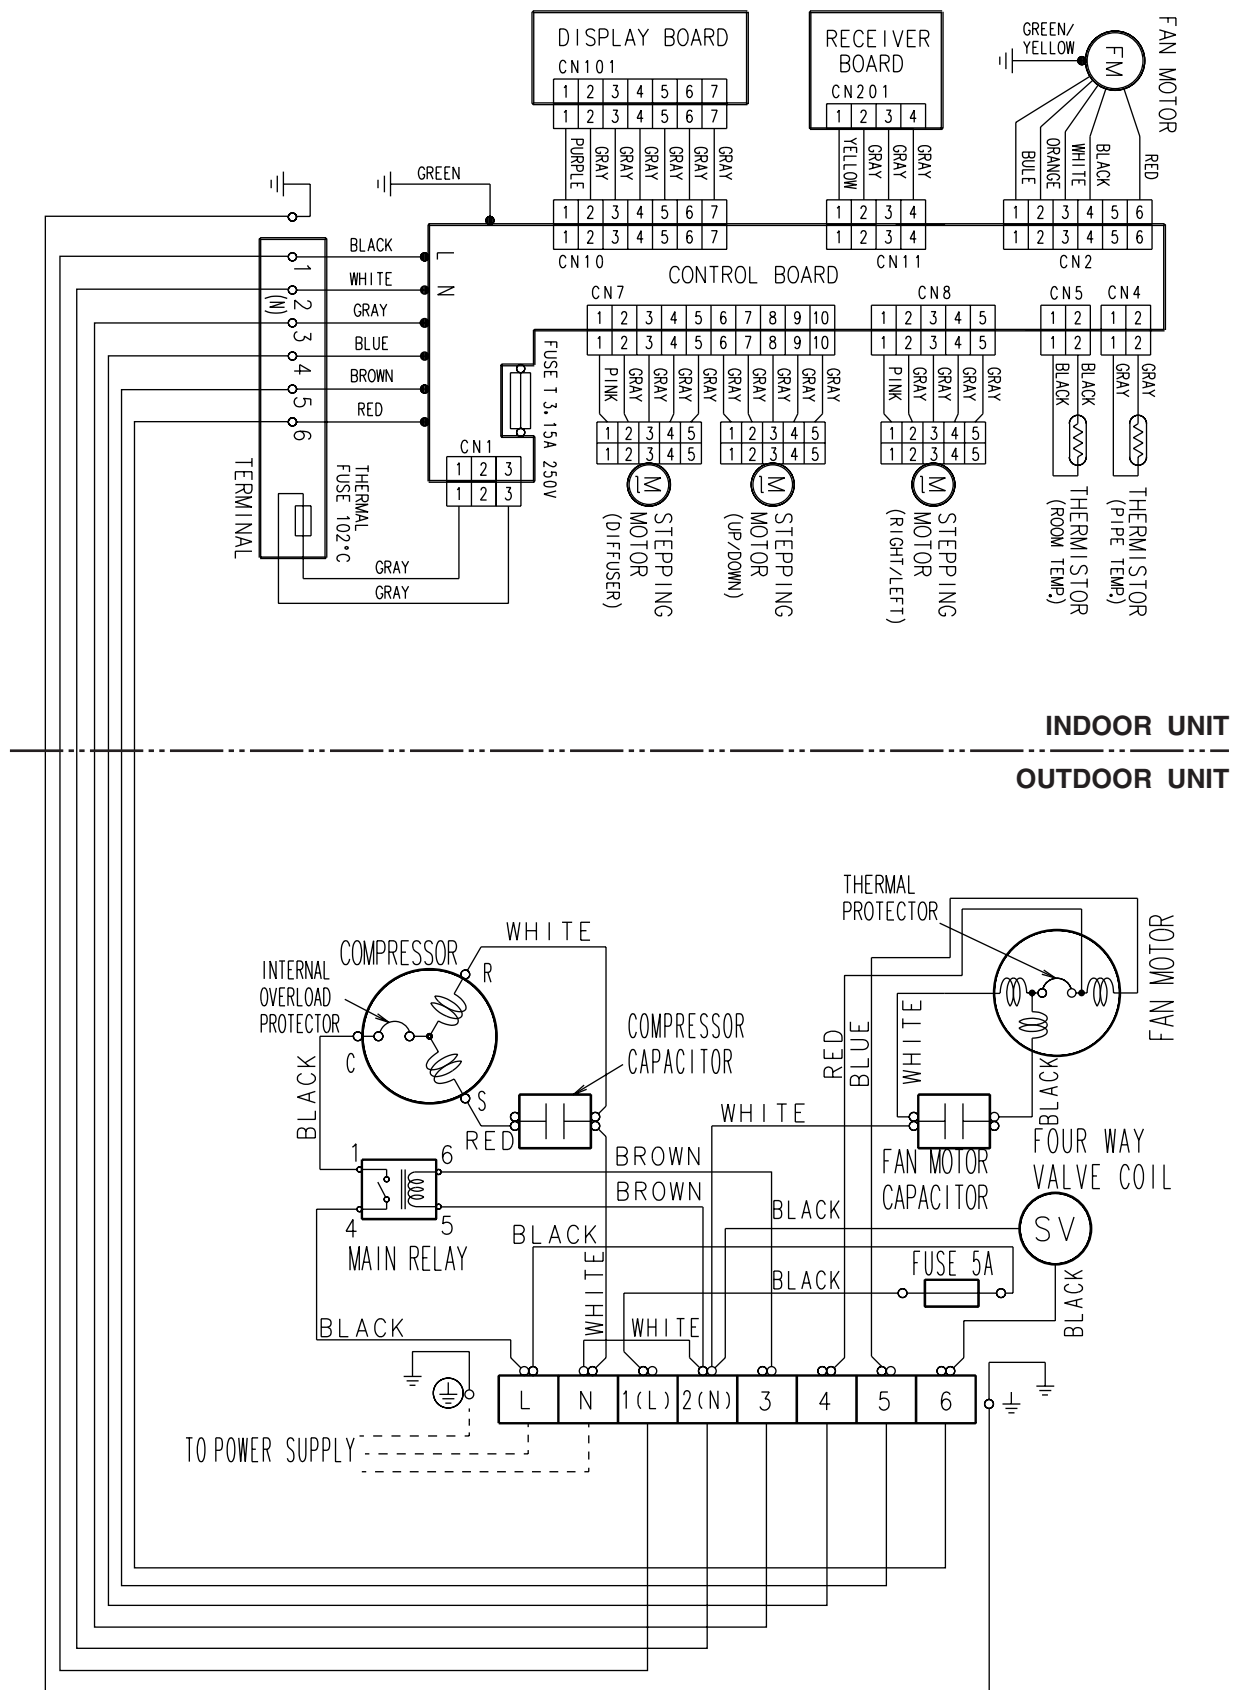

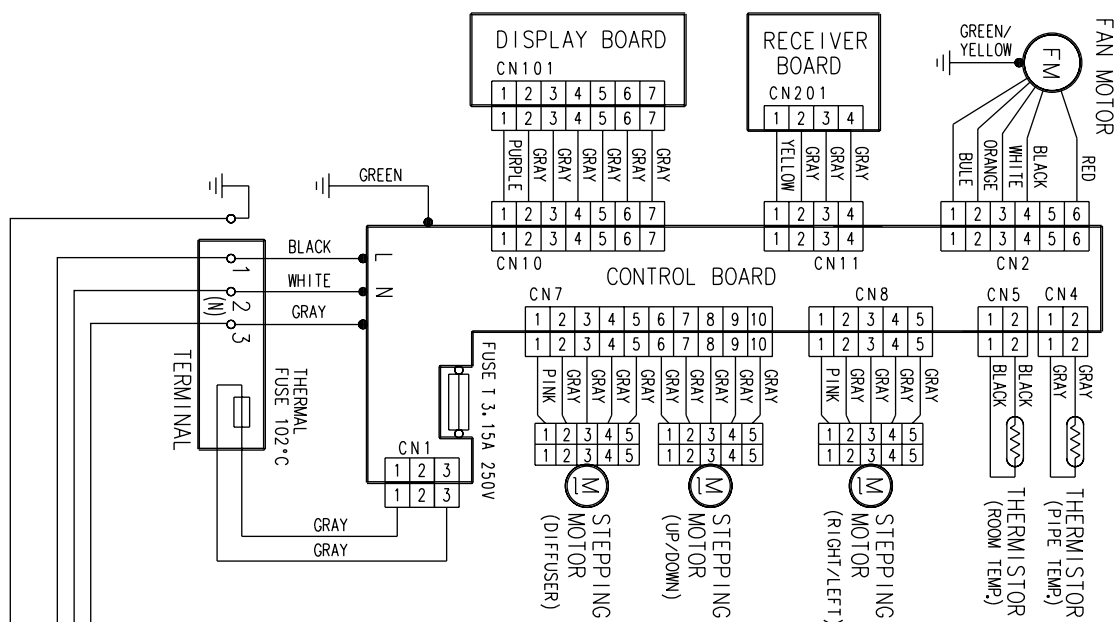


**INDOOR UNIT**  
**OUTDOOR UNIT**

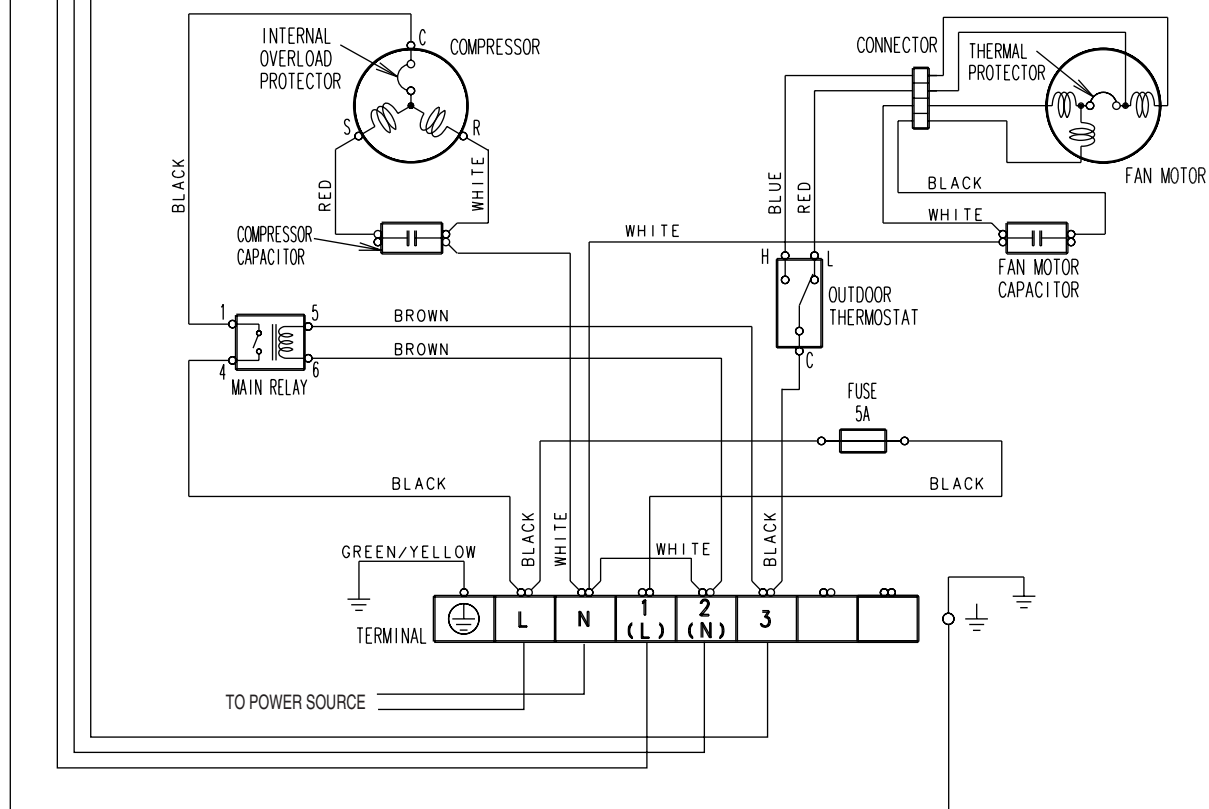

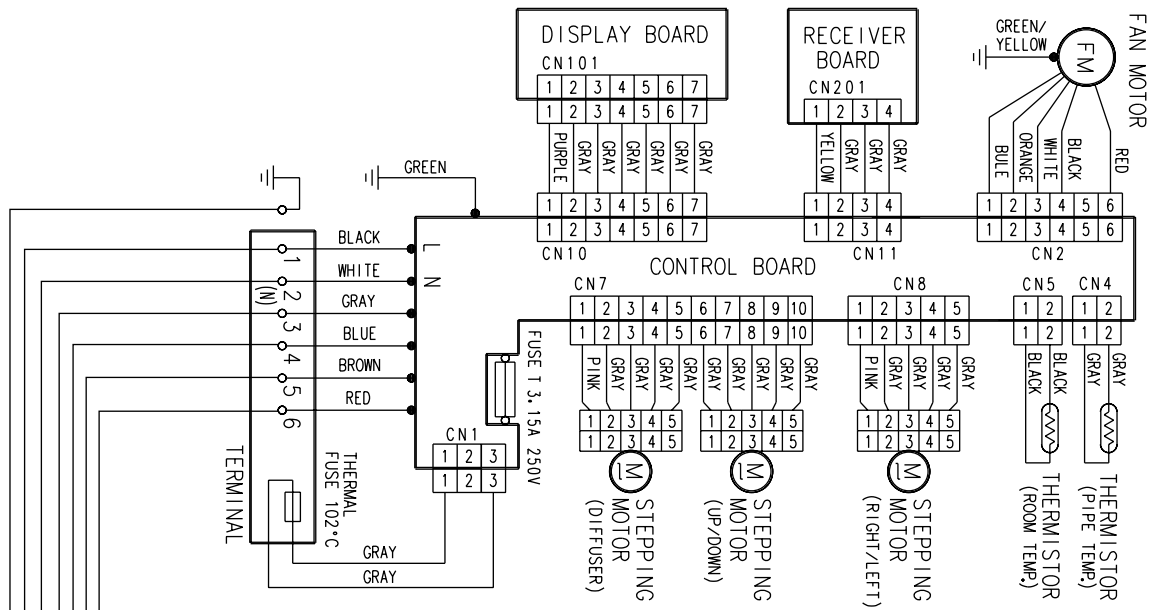

INDOOR UNIT

OUTDOOR UNIT

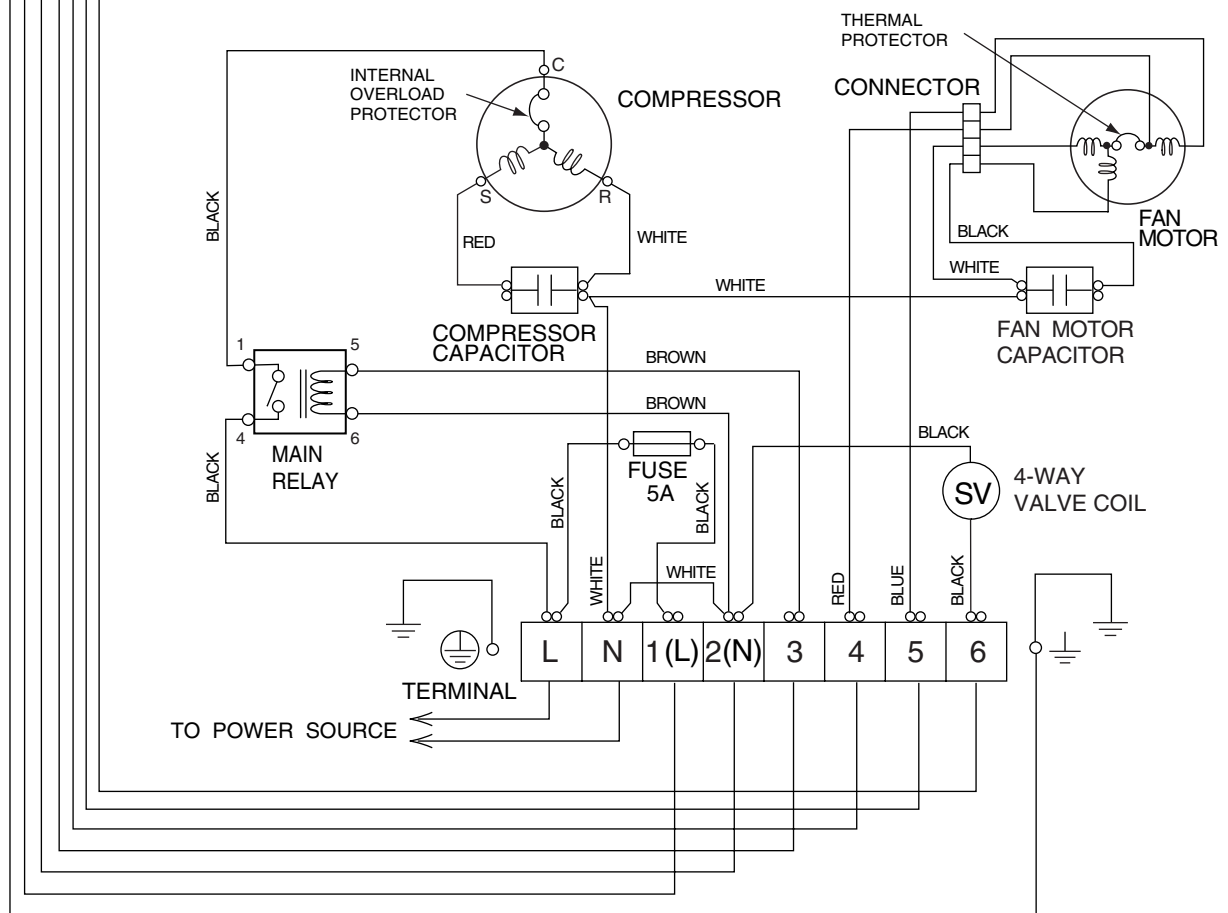

## ERROR DISPLAY

The OPERATION, TIMER and SWING lamps operate as follows according to the error contents.


○ : Fast flashing      ● : Slow flashing      – : Off

| Error contents                                           | Error display      |                   |                   |
|----------------------------------------------------------|--------------------|-------------------|-------------------|
|                                                          | OPERATION<br>(RED) | TIMER<br>(YELLOW) | SWING<br>(ORANGE) |
| Indoor unit circuit board error                          | ○                  | ○                 | –                 |
| Indoor unit room temperature sensor wire opened          | 2 times ●          | ○                 | –                 |
| Indoor unit room temperature sensor wire short circuited | 2 times ●          | ○                 | ○                 |
| Indoor unit piping sensor wire opened                    | 3 times ●          | ○                 | –                 |
| Indoor unit piping sensor wire short circuited           | 3 times ●          | ○                 | ○                 |
| Indoor unit fan error                                    | 6 times ●          | ○                 | –                 |

INDOOR PRINTED CIRCUIT BOARD  
CIRCUIT DIAGRAM


Models : RJ-18FA, RJ-18FB  
RJ-24FB, RJ-30FB

CONTROLLER PCB ASSEMBLY ( MAIN PCB )  
RJ-18FA : EZ-003LWSE-C  
RJ-18FB : EZ-001EWSE-C  
RJ-24FB : EZ-001DWSE-C  
RJ-30FB : EZ-001KWSE-C

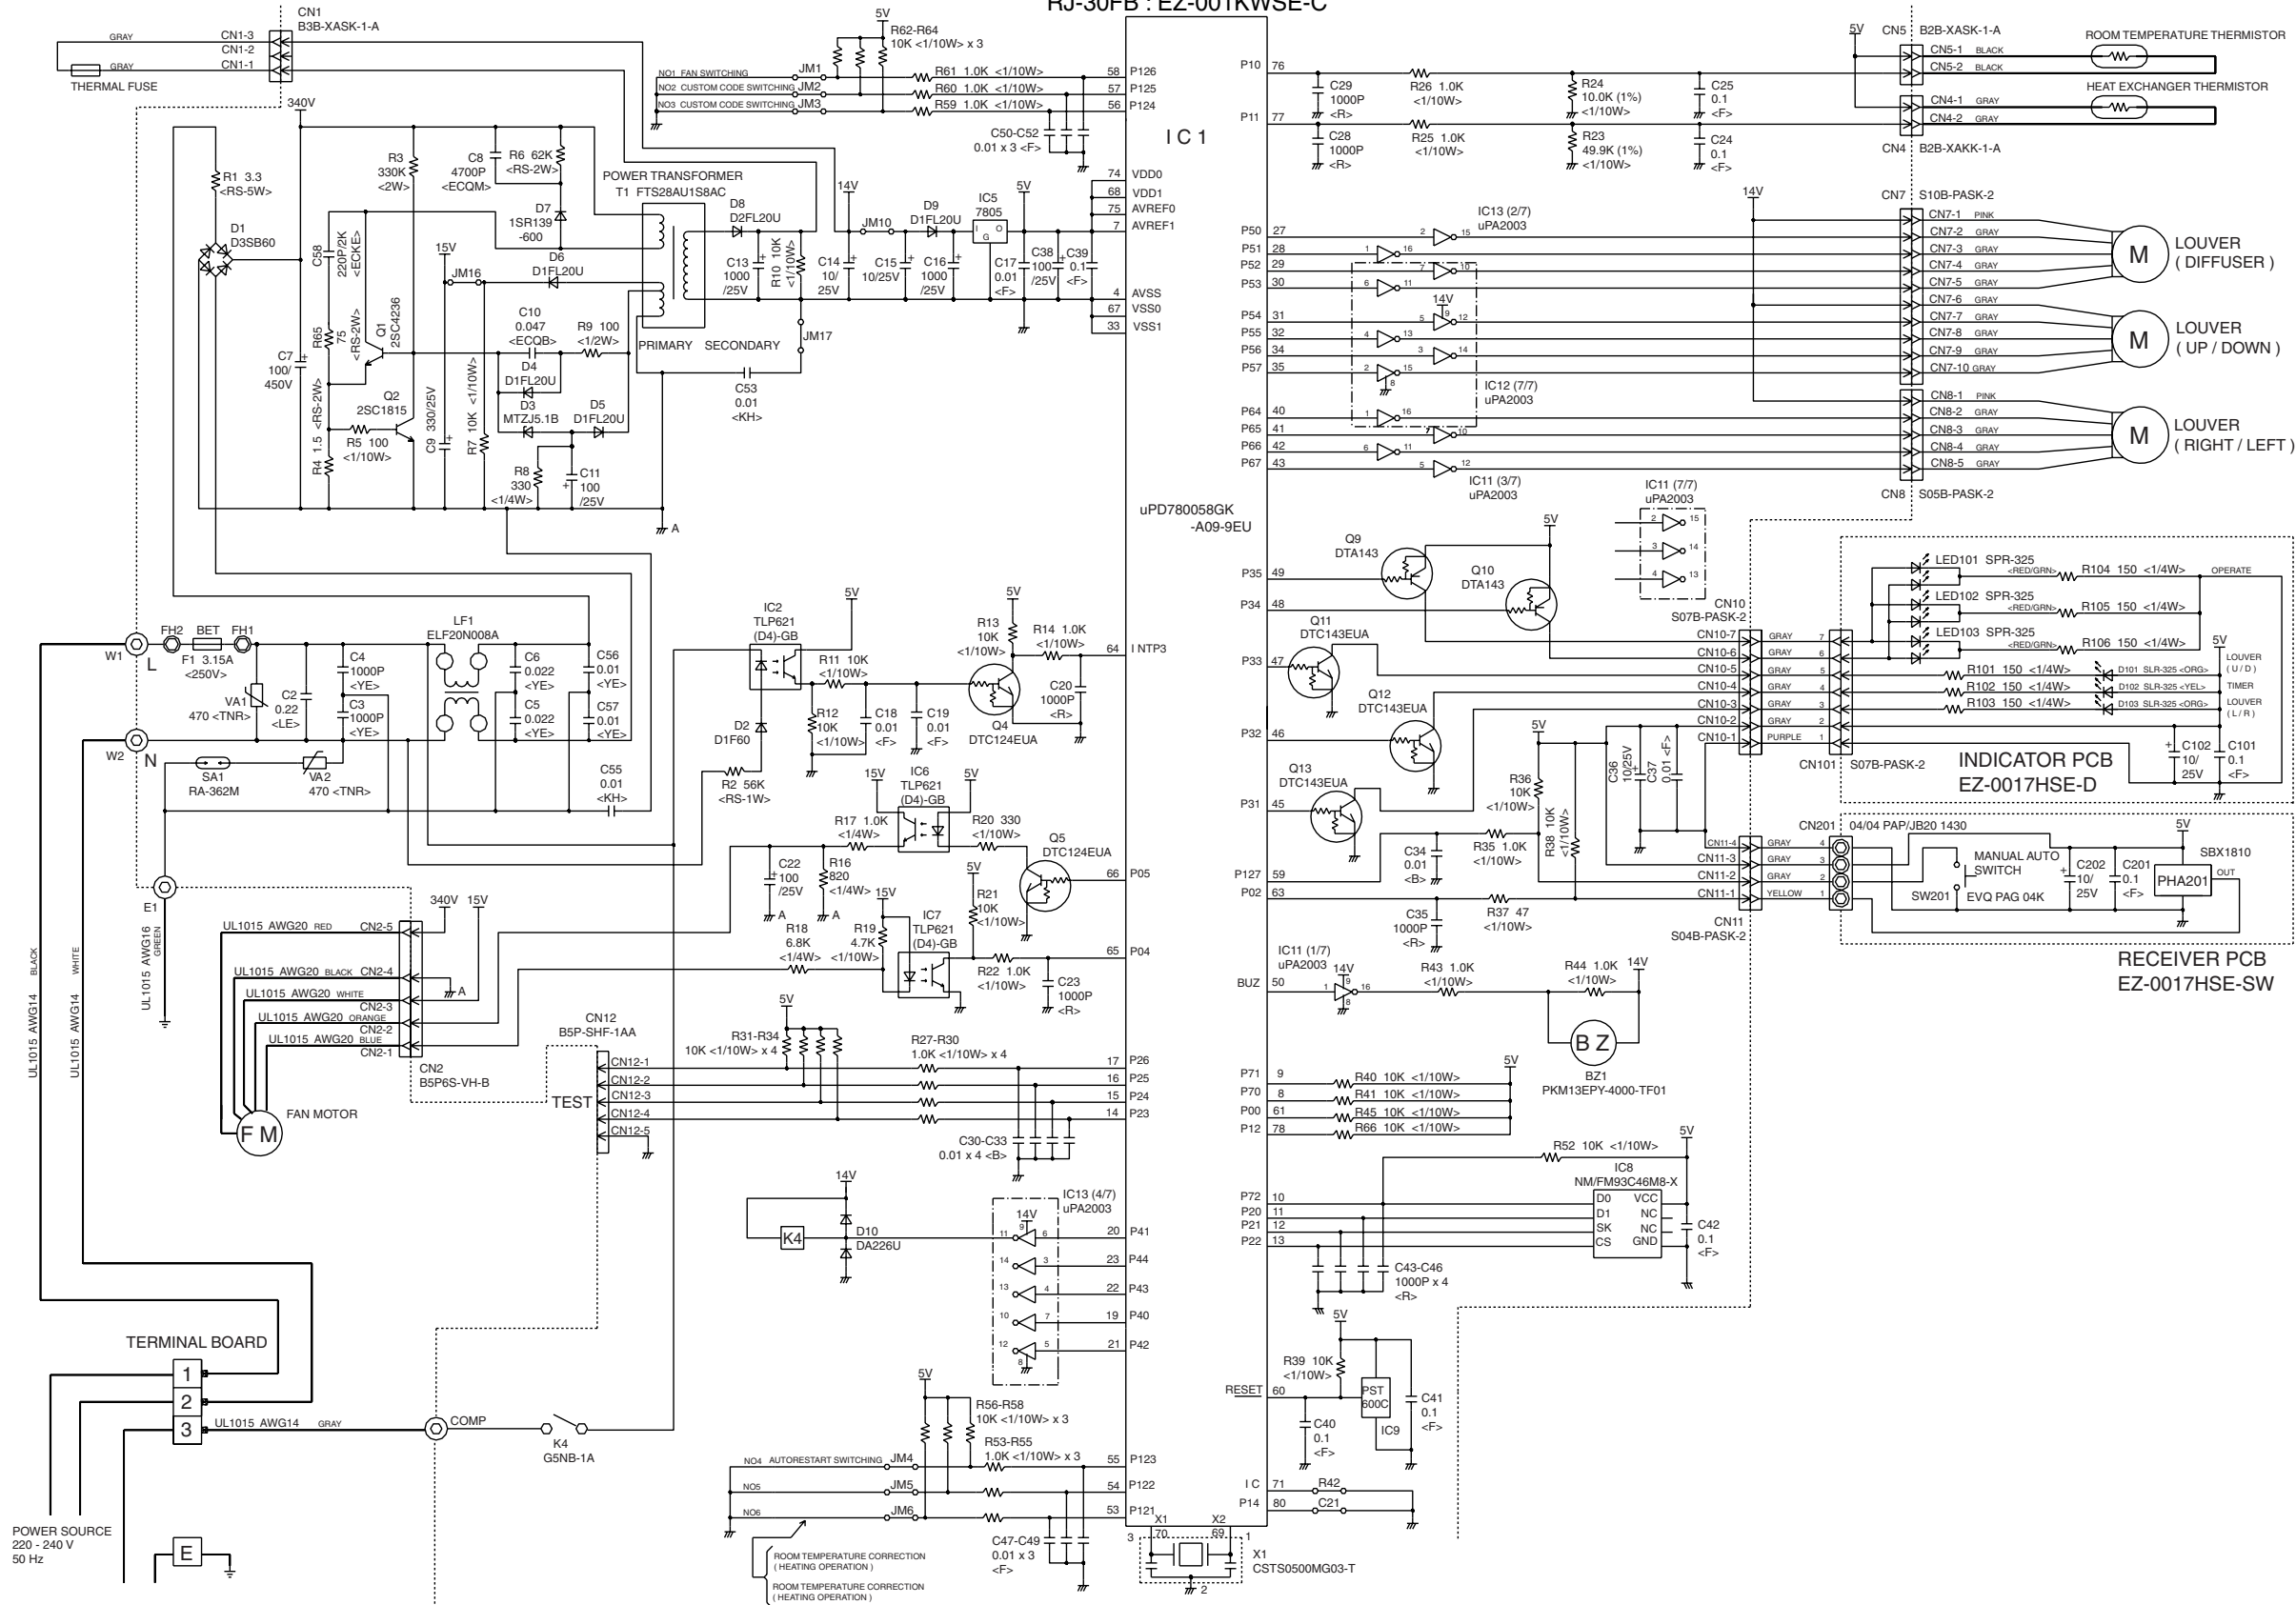


Models : RJ-18UA, RJ-18UB  
RJ-24UB, RJ-30UB

CONTROLLER PCB ASSEMBLY ( MAIN PCB )  
RJ-18UA : EZ-00304HSE-C  
RJ-18UB : EZ-003BHSE-C  
RJ-24UB : EZ-0017HSE-C  
RJ-30UB : EZ-001THSE-C

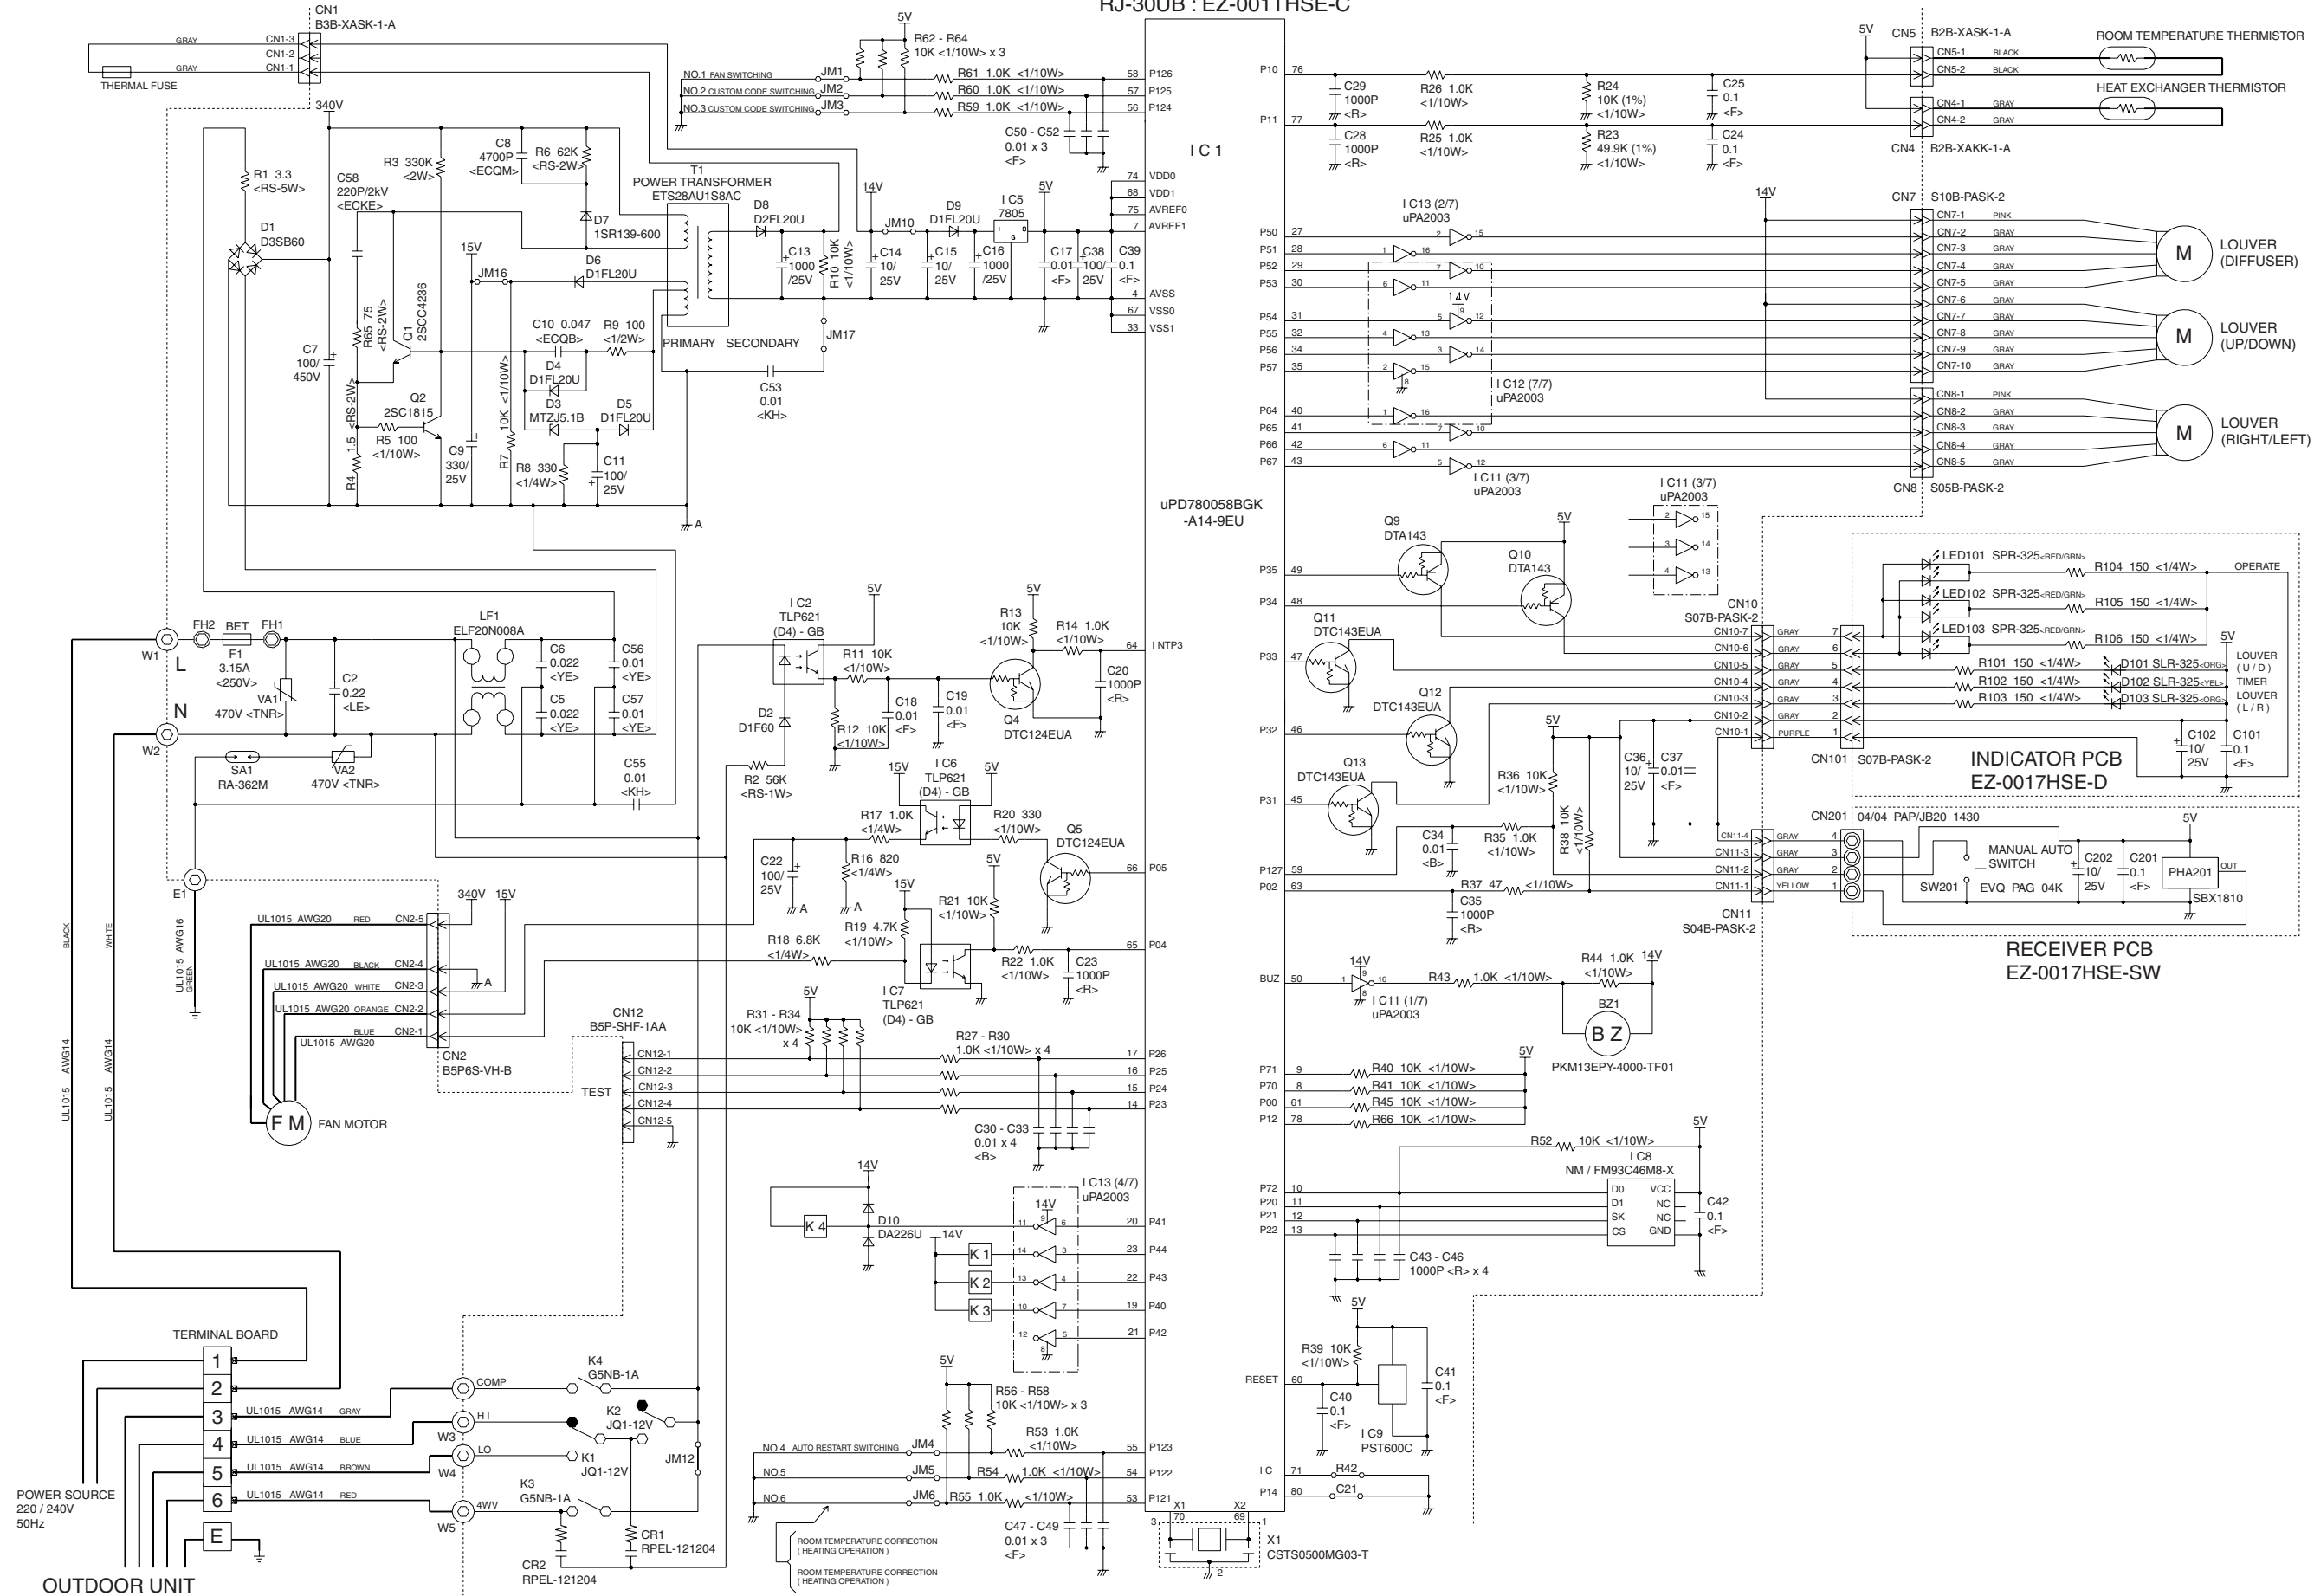


# DISASSEMBLY ILLUSTRATION (Indoor unit)


Models : RJ-18FA RJ-18UA  
 RJ-18FB RJ-18UB  
 RJ-24FB RJ-24UB  
 RJ-30FB RJ-30UB

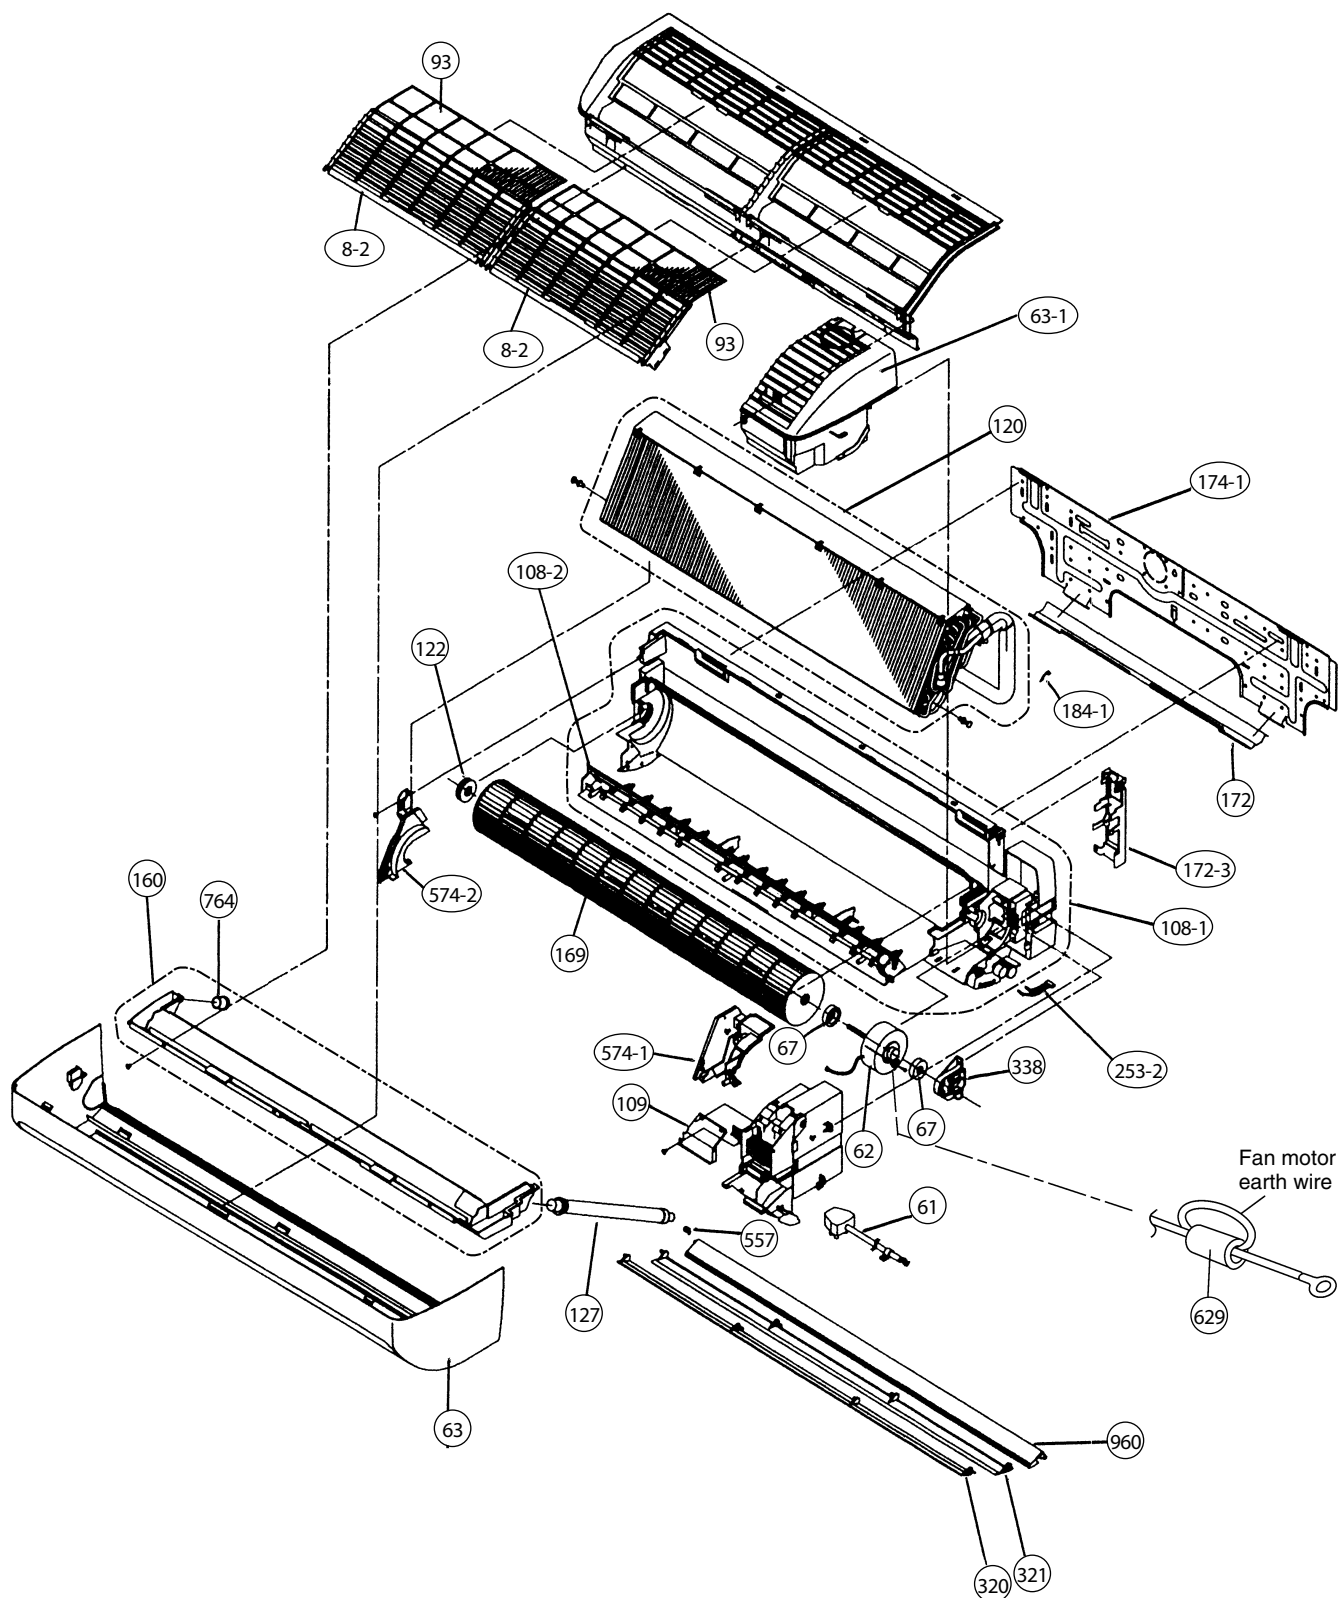



120

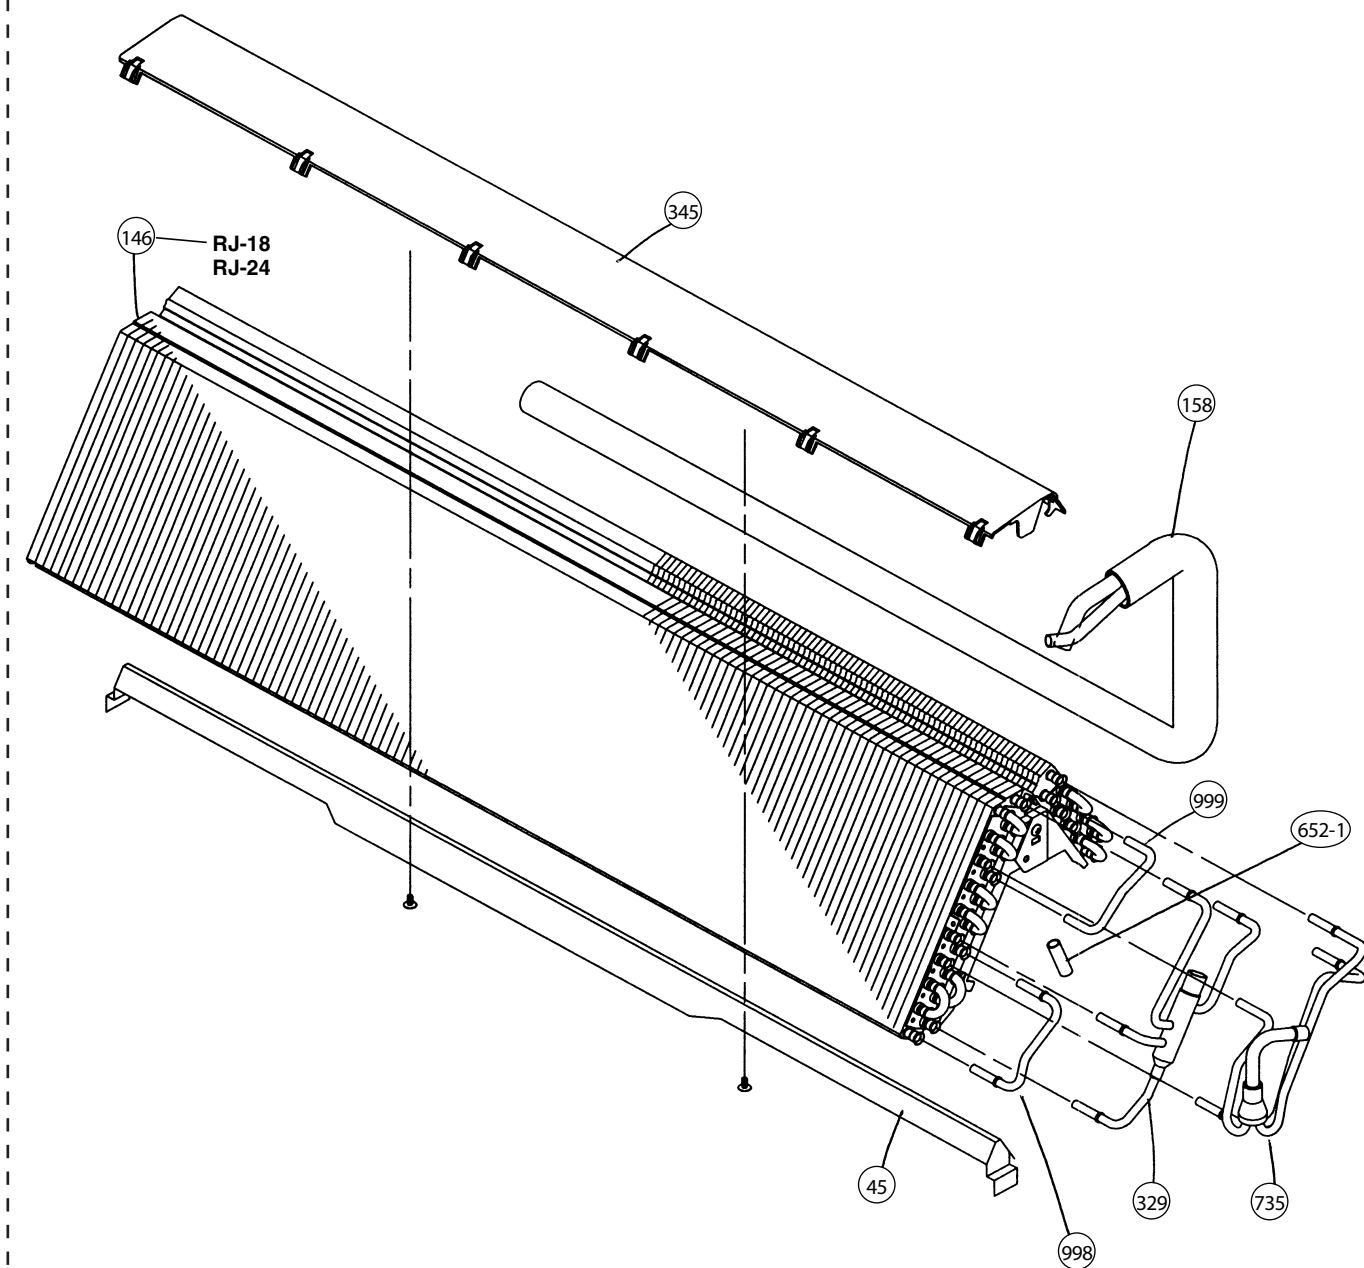



Models : RJ-30FB  
RJ-30UB

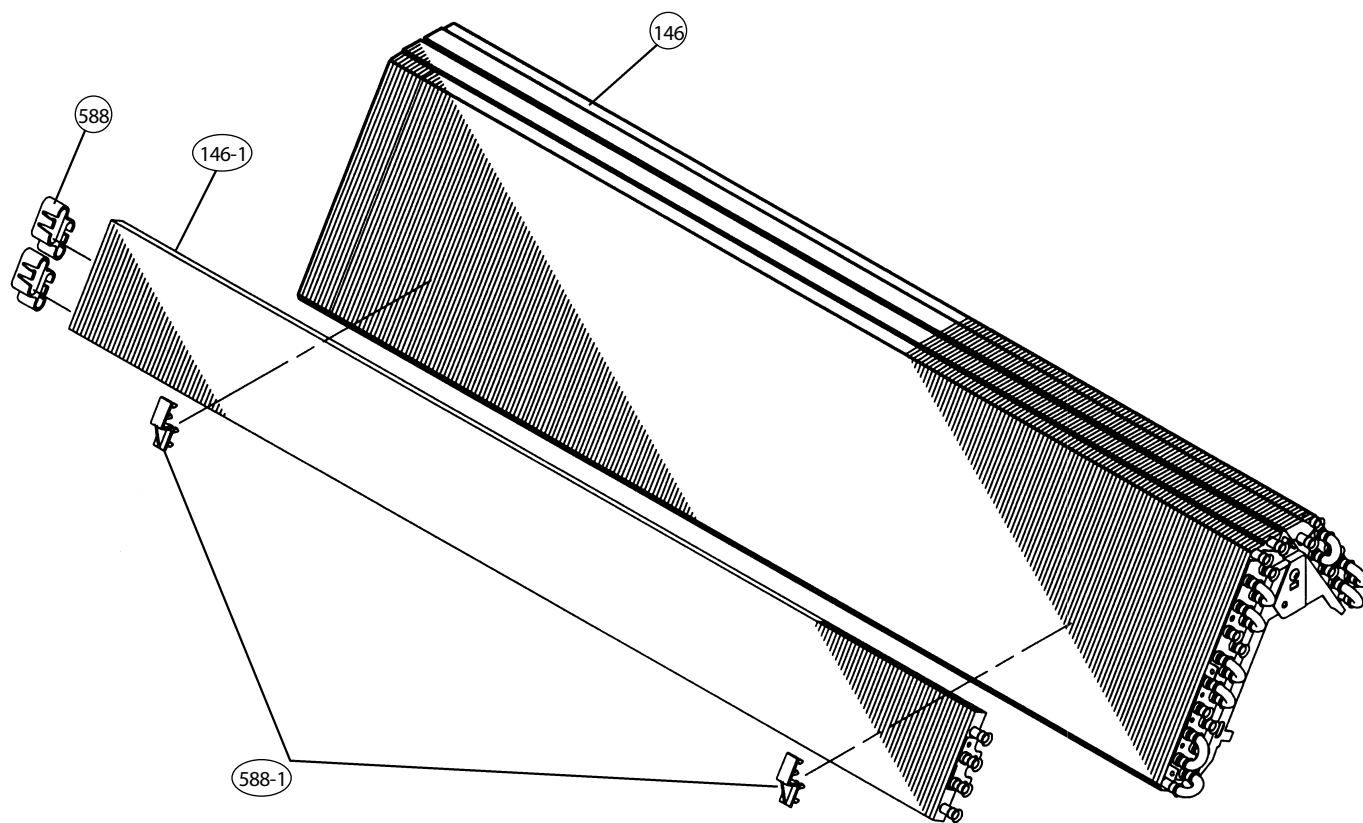


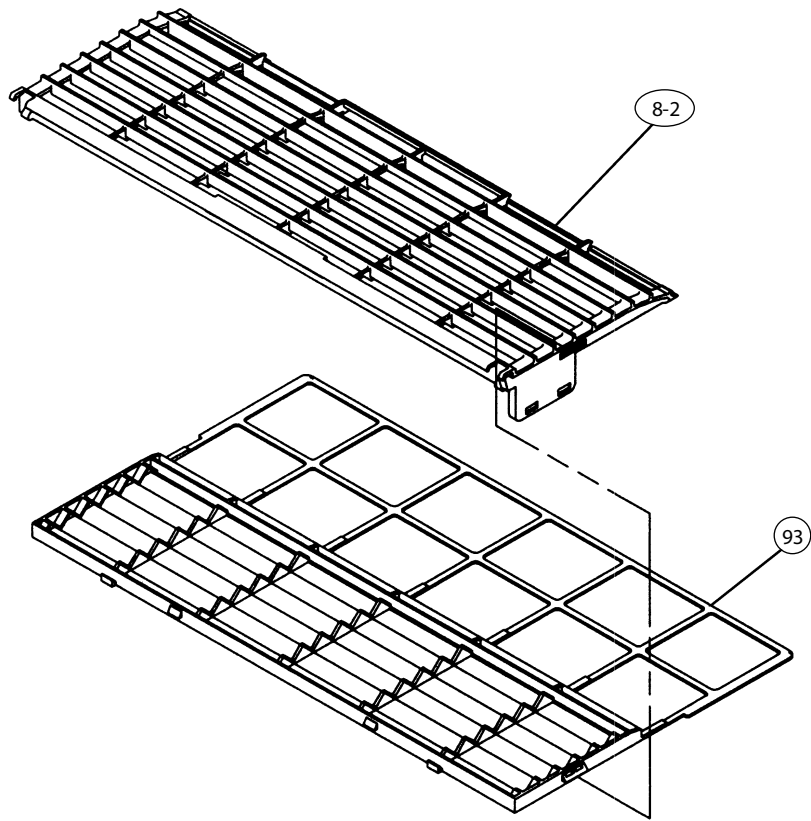


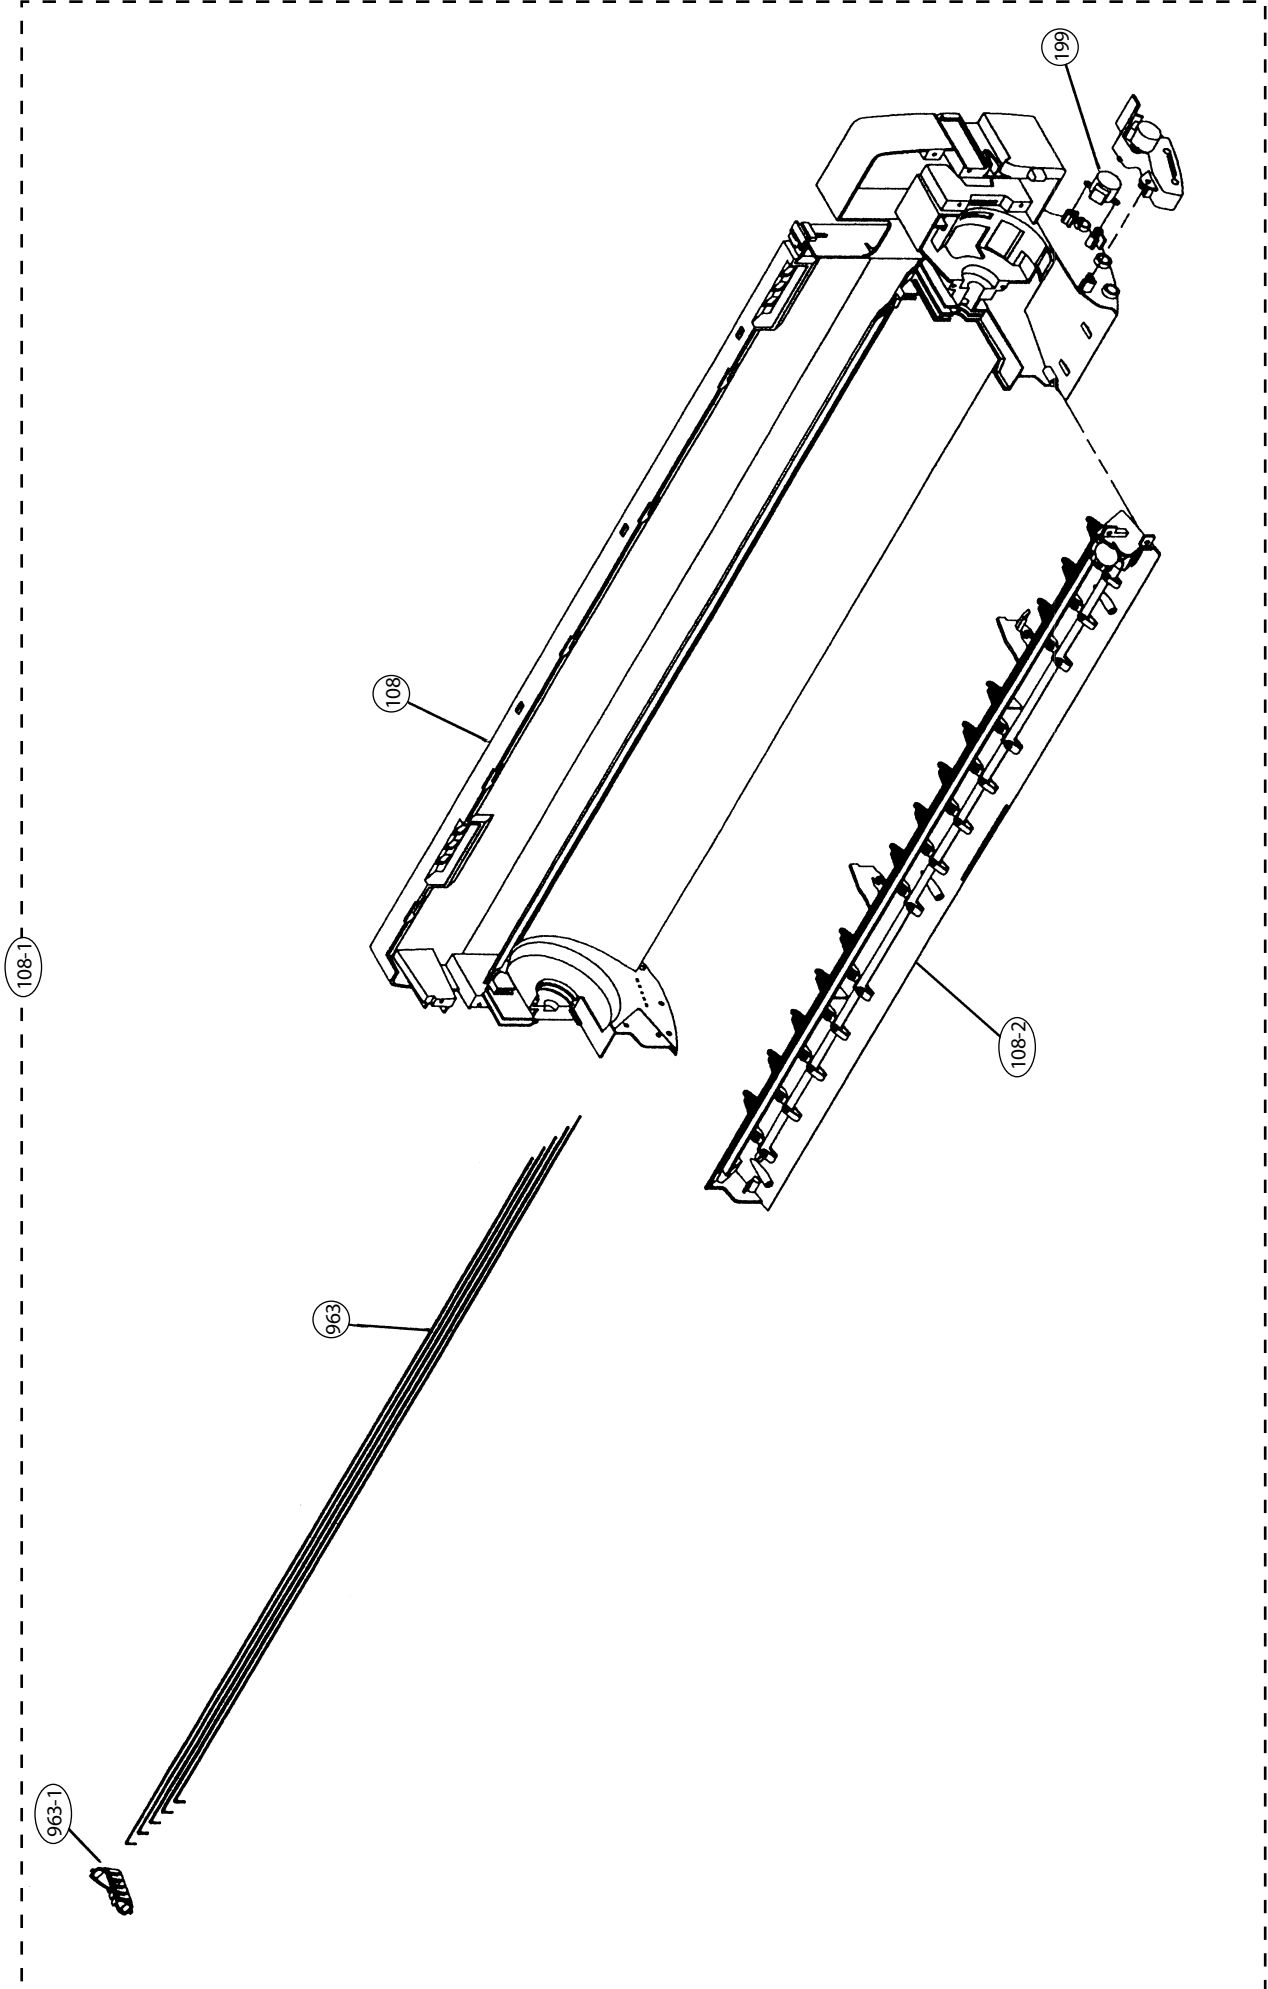


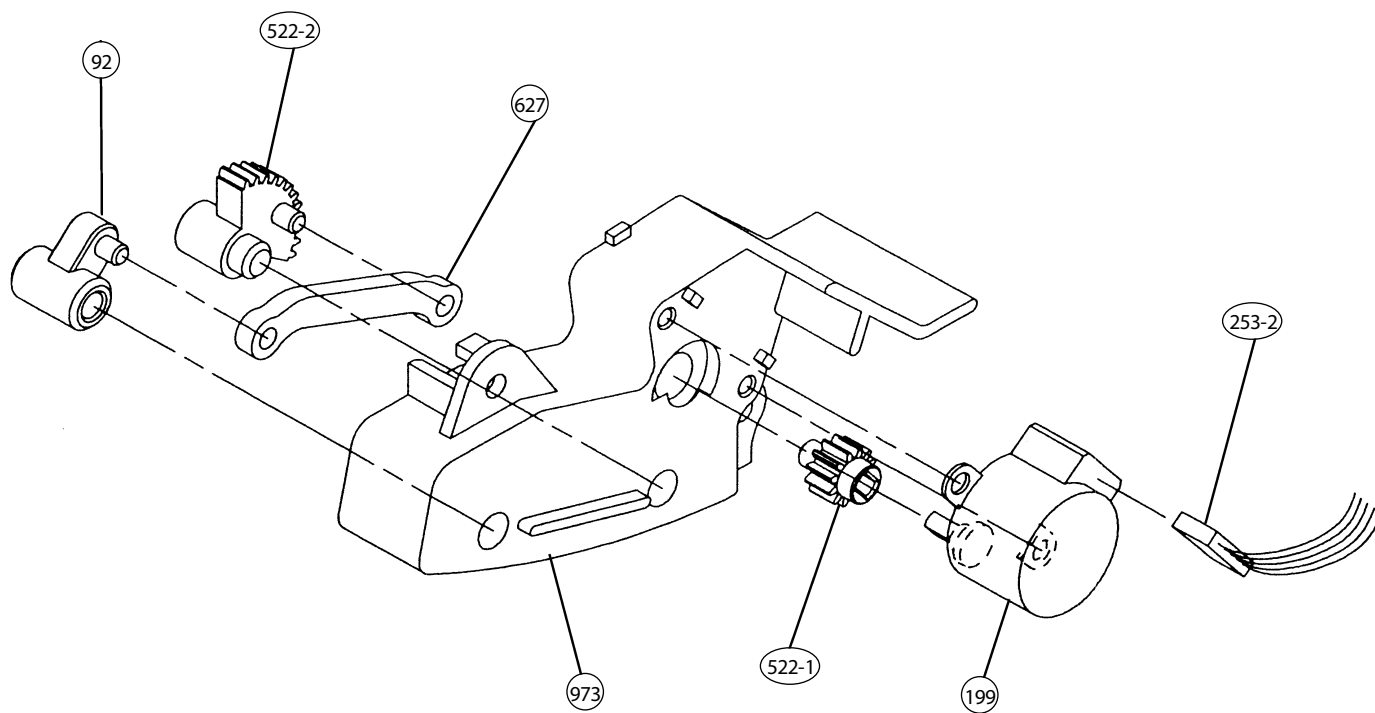

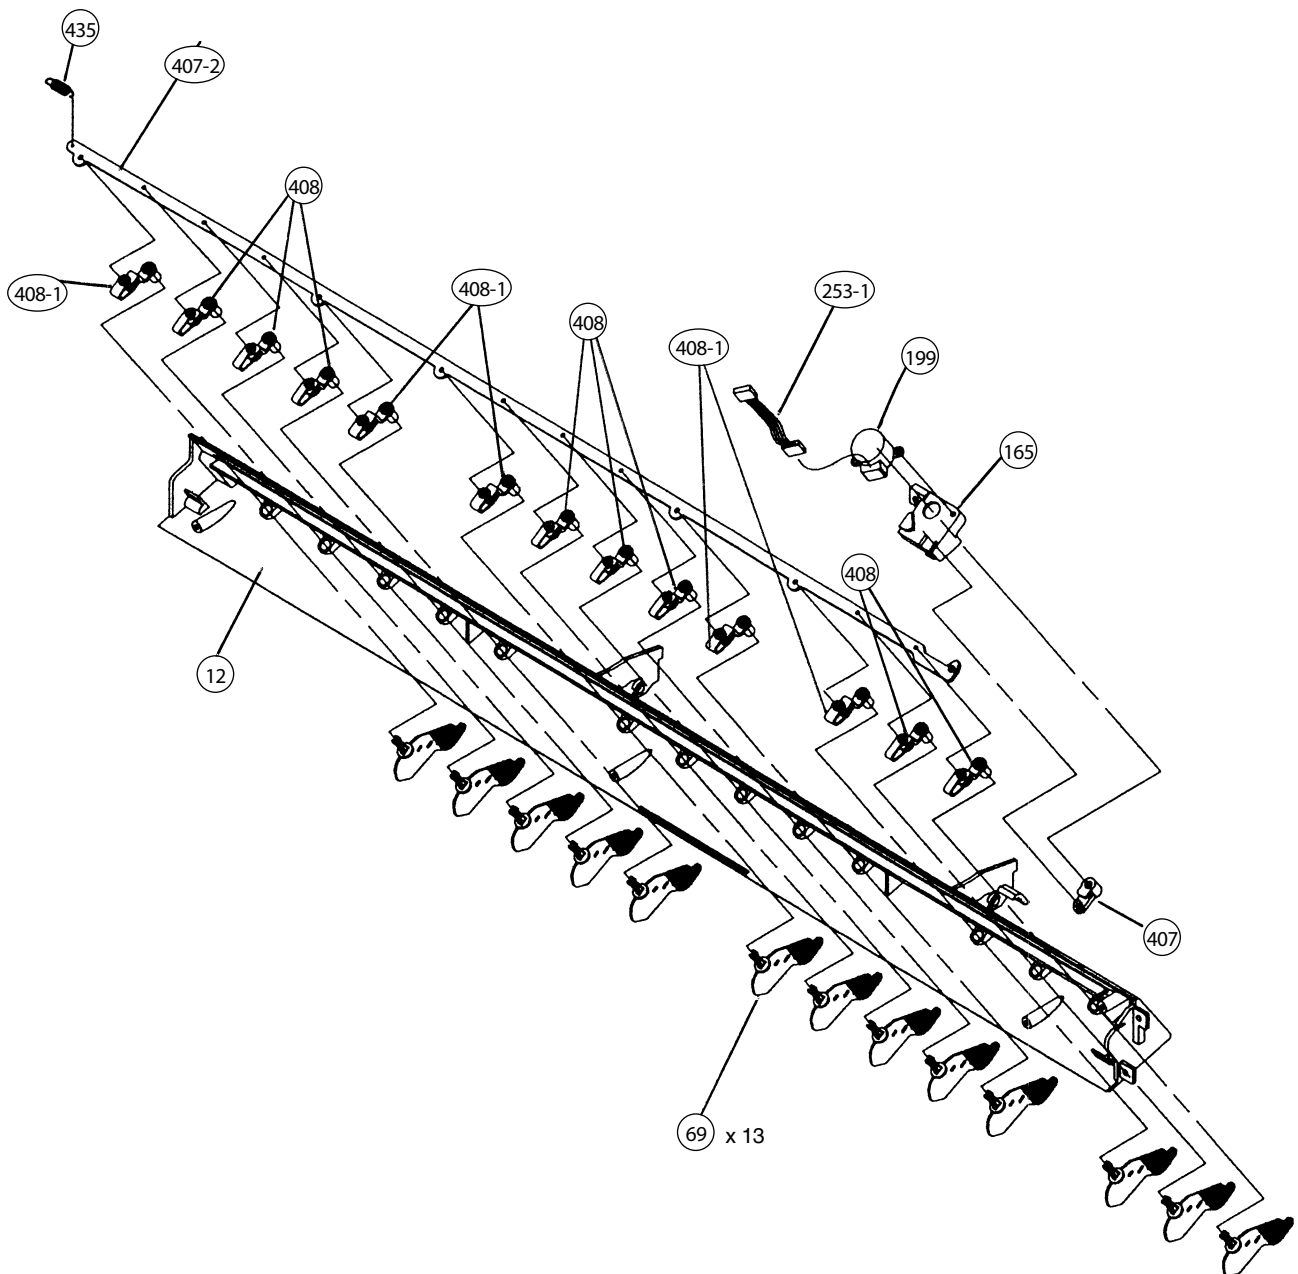

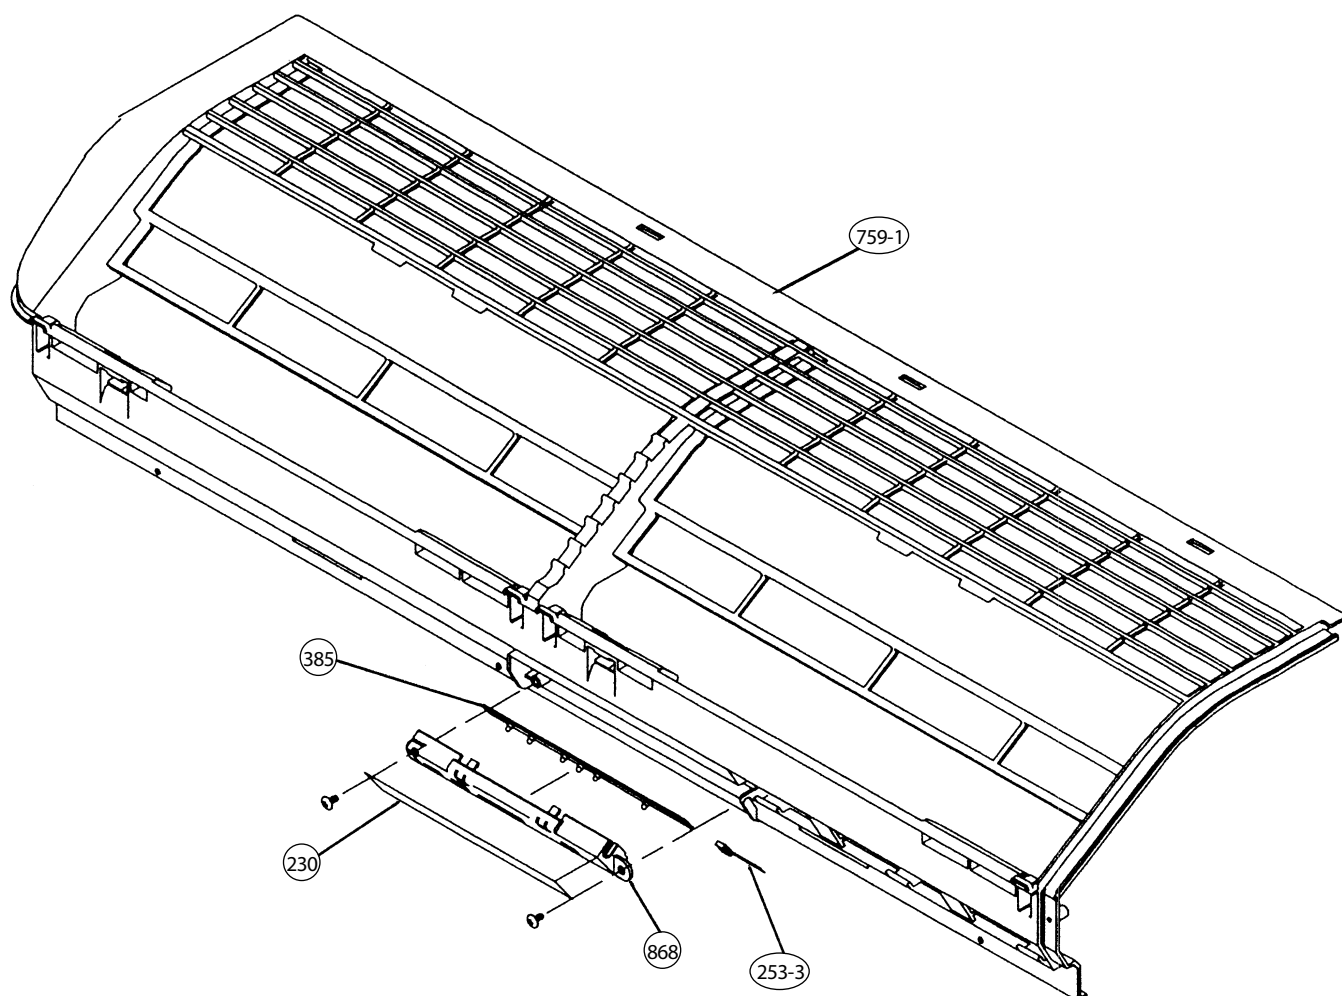


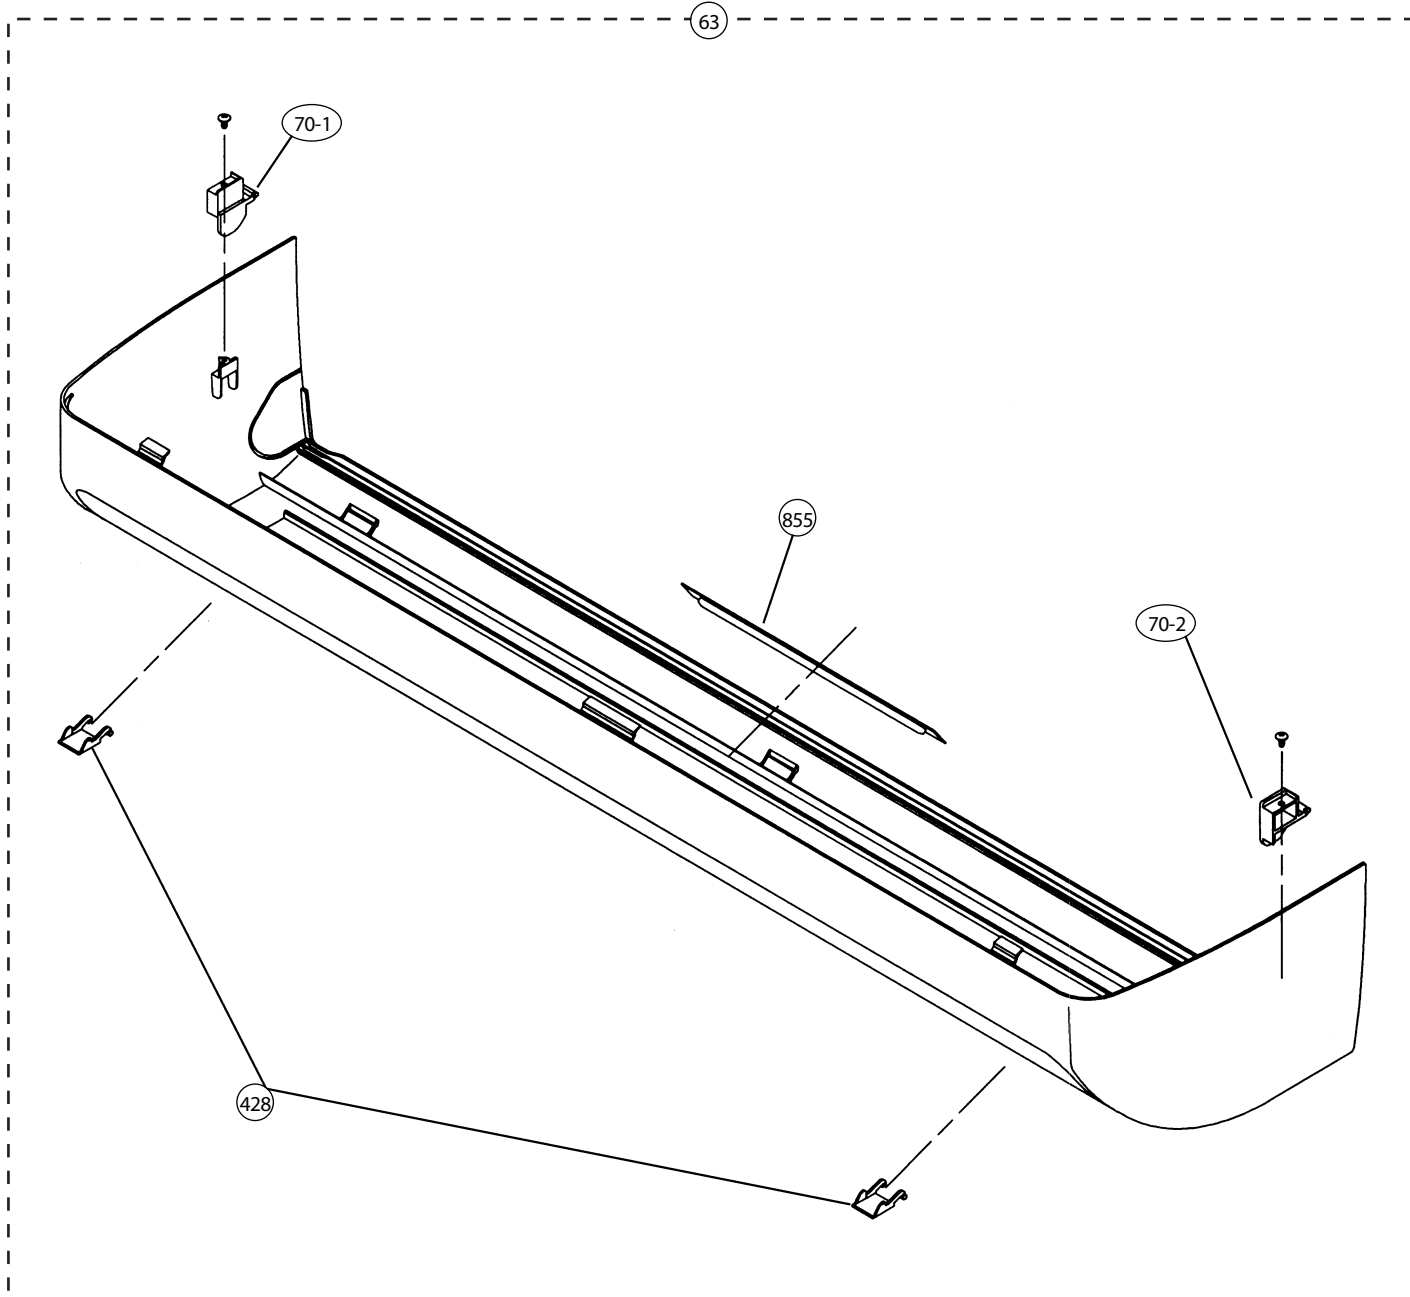

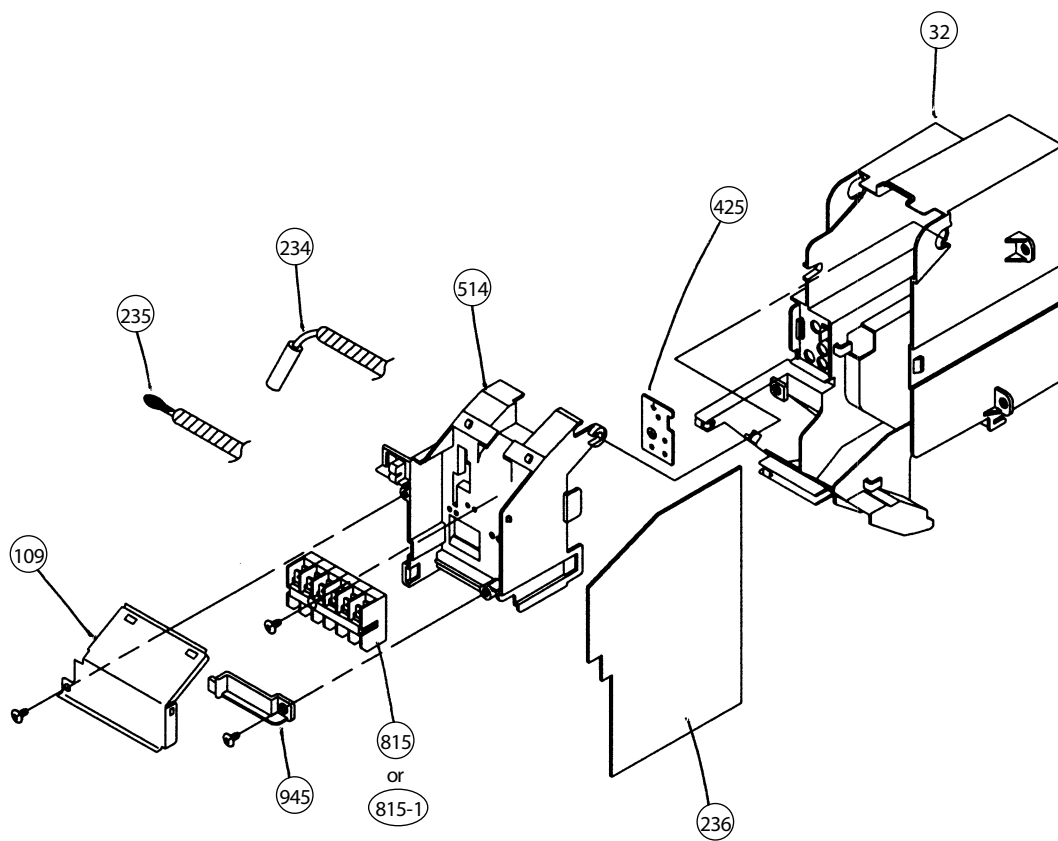



# DISASSEMBLY ILLUSTRATION (Outdoor unit)

Models : RO-18FA  
RO-18FB  
RO-24FB  
RO-18UA  
RO-18UB  
RO-24UB

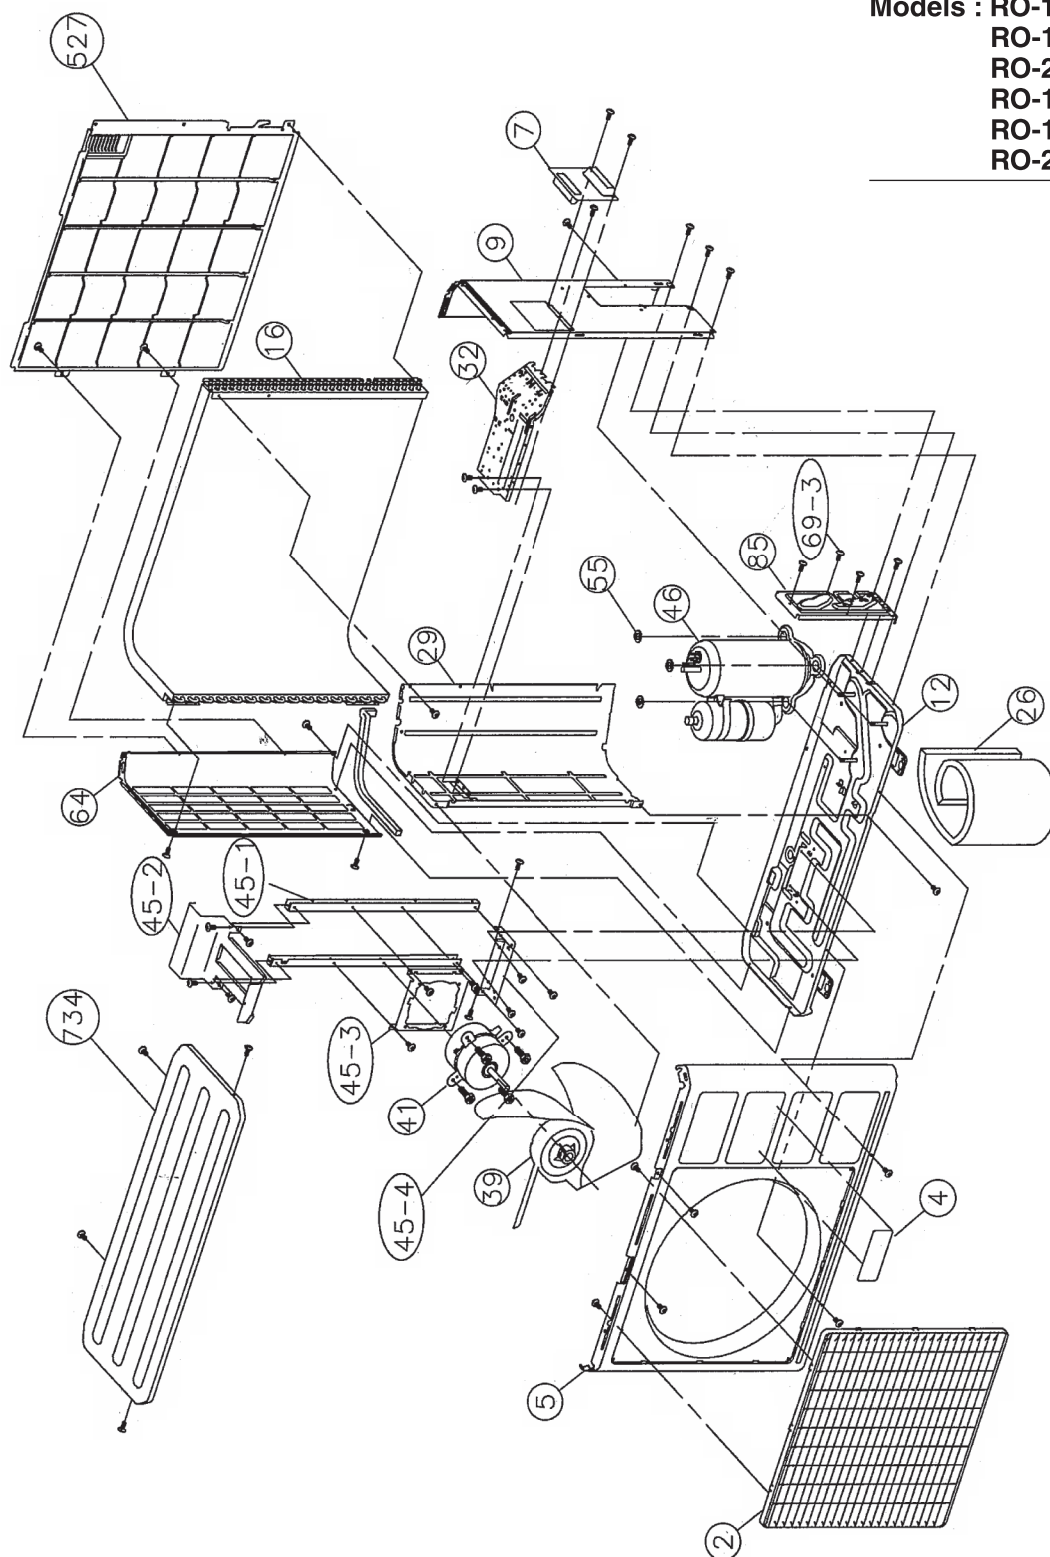


Models : RO-30FB  
RO-30UB

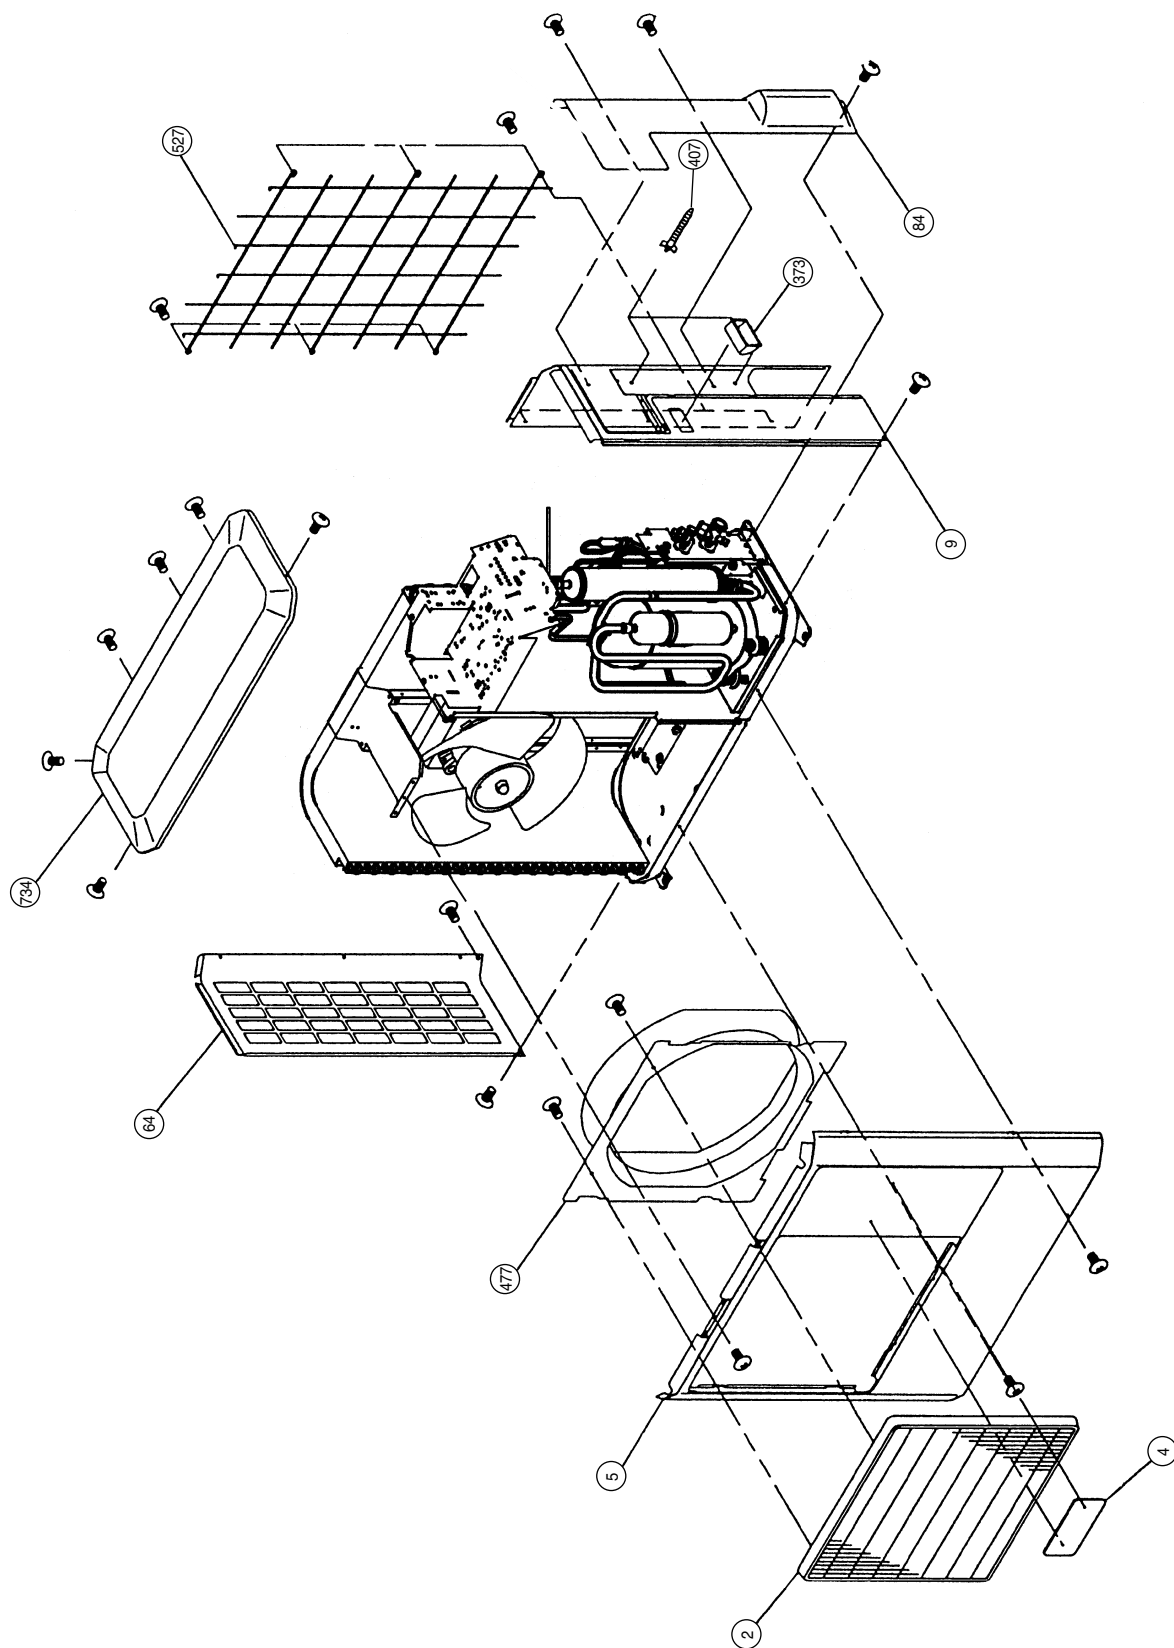


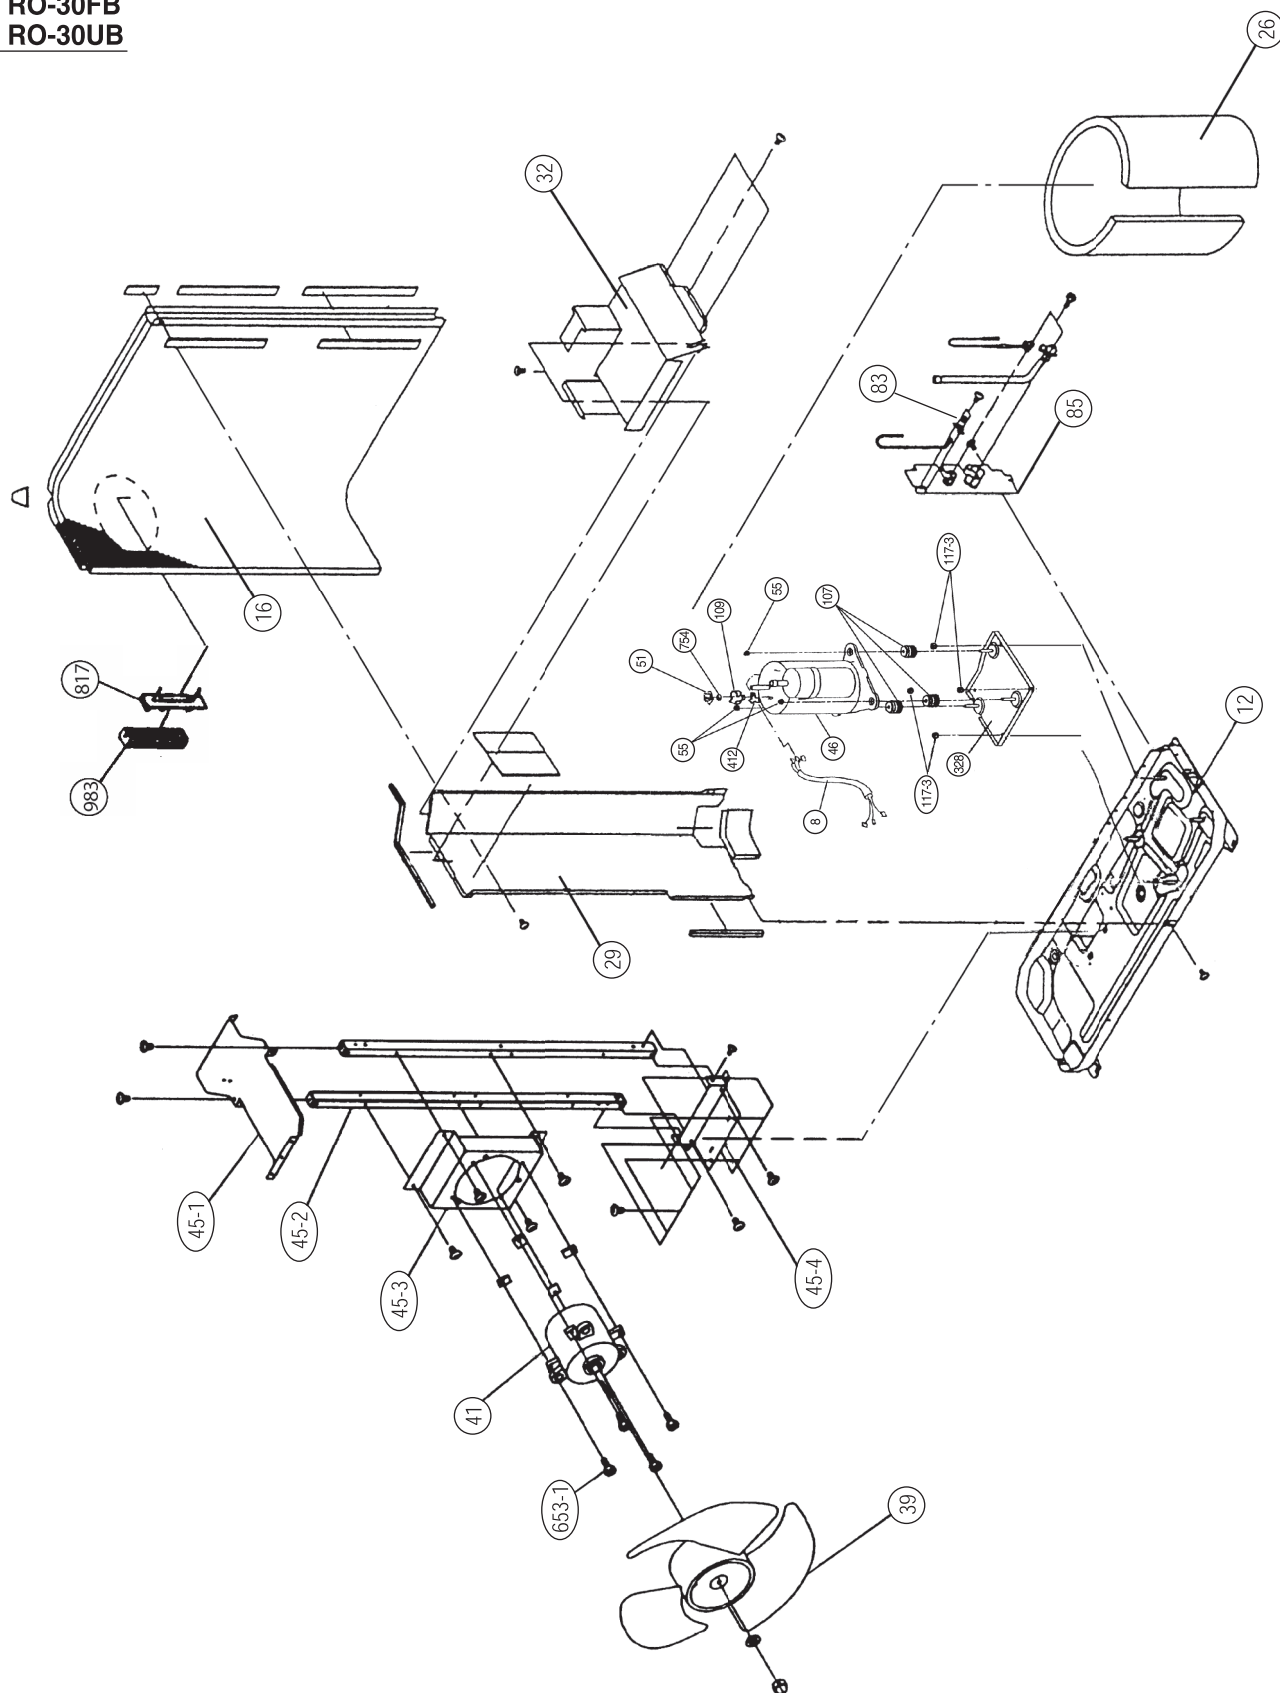


**Model : RO-18UA**

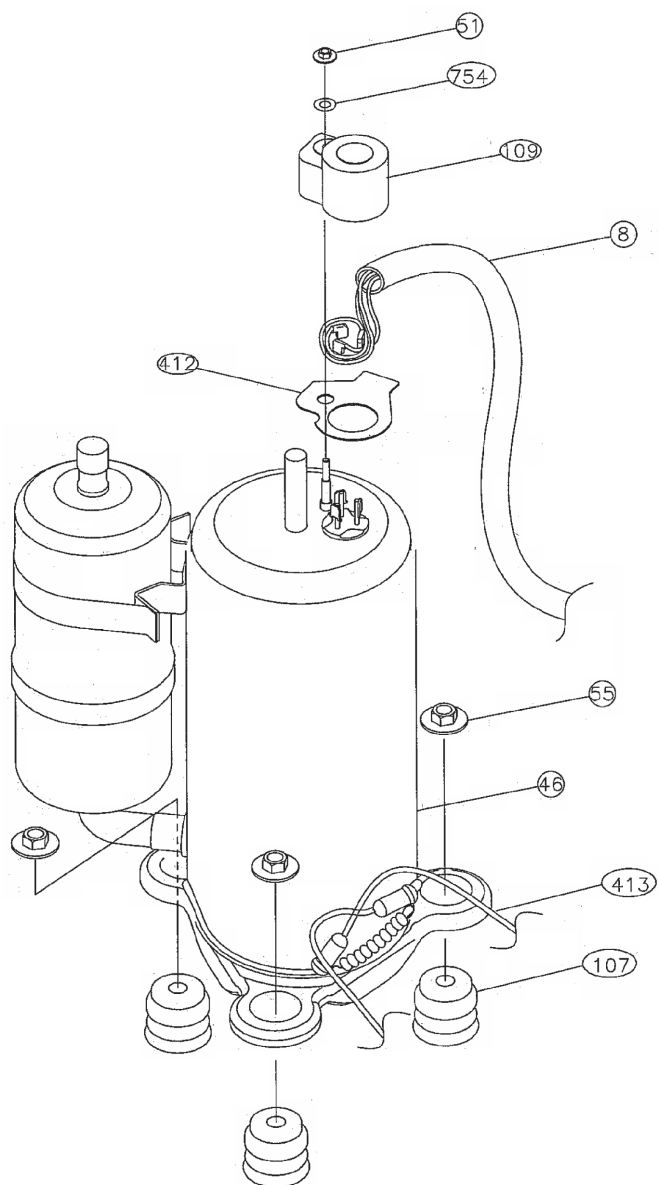


**Models : RO-18FA  
RO-18FB  
RO-18UB  
RO-24FB  
RO-24UB  
RO-30FB  
RO-30UB**

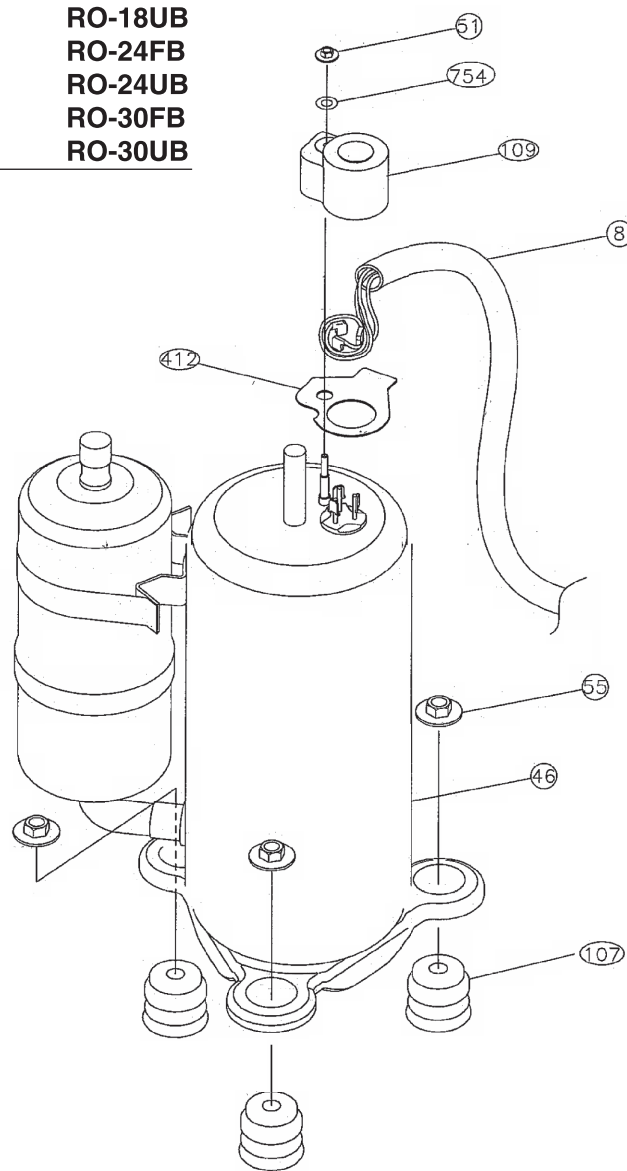


**Models : RO-18FA  
RO-18FB  
RO-24FB**

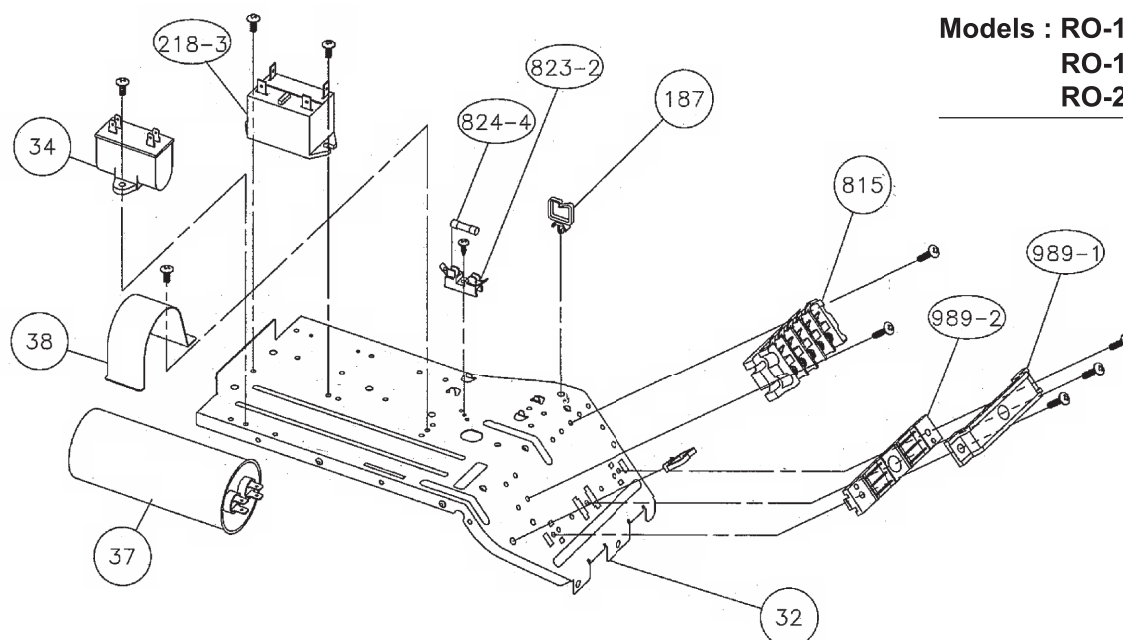


**Model : RO-18UA**

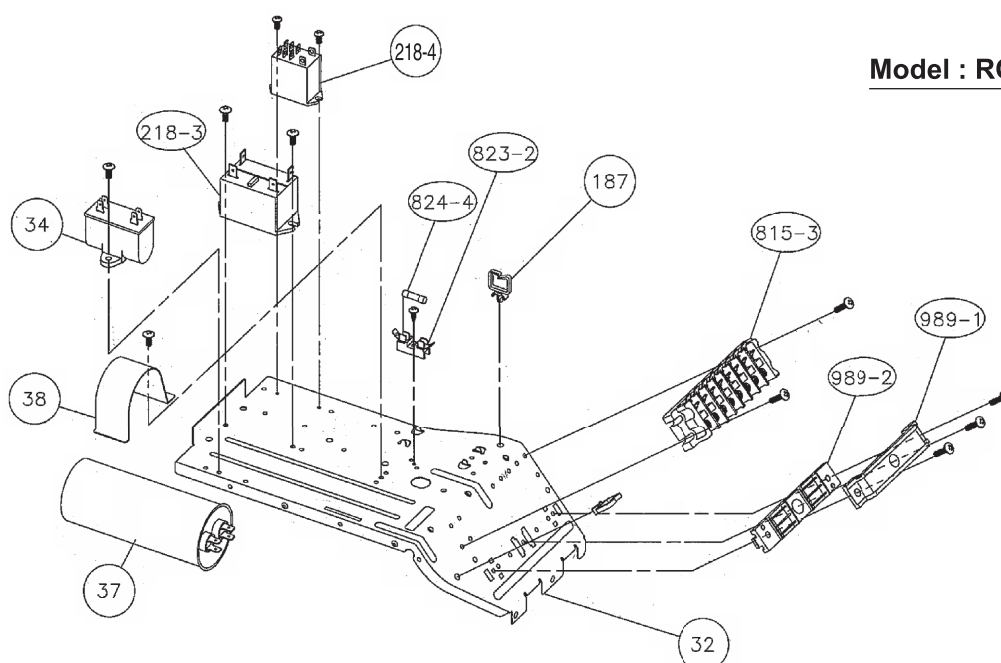


**Models : RO-18UB  
RO-24UB**

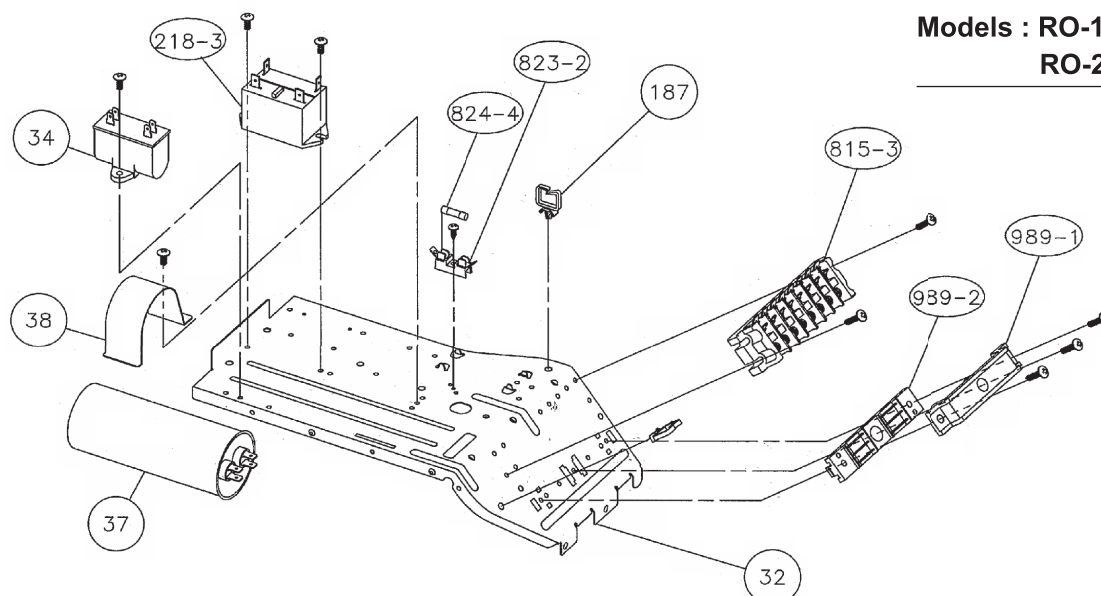



**Model : RO-30FB**

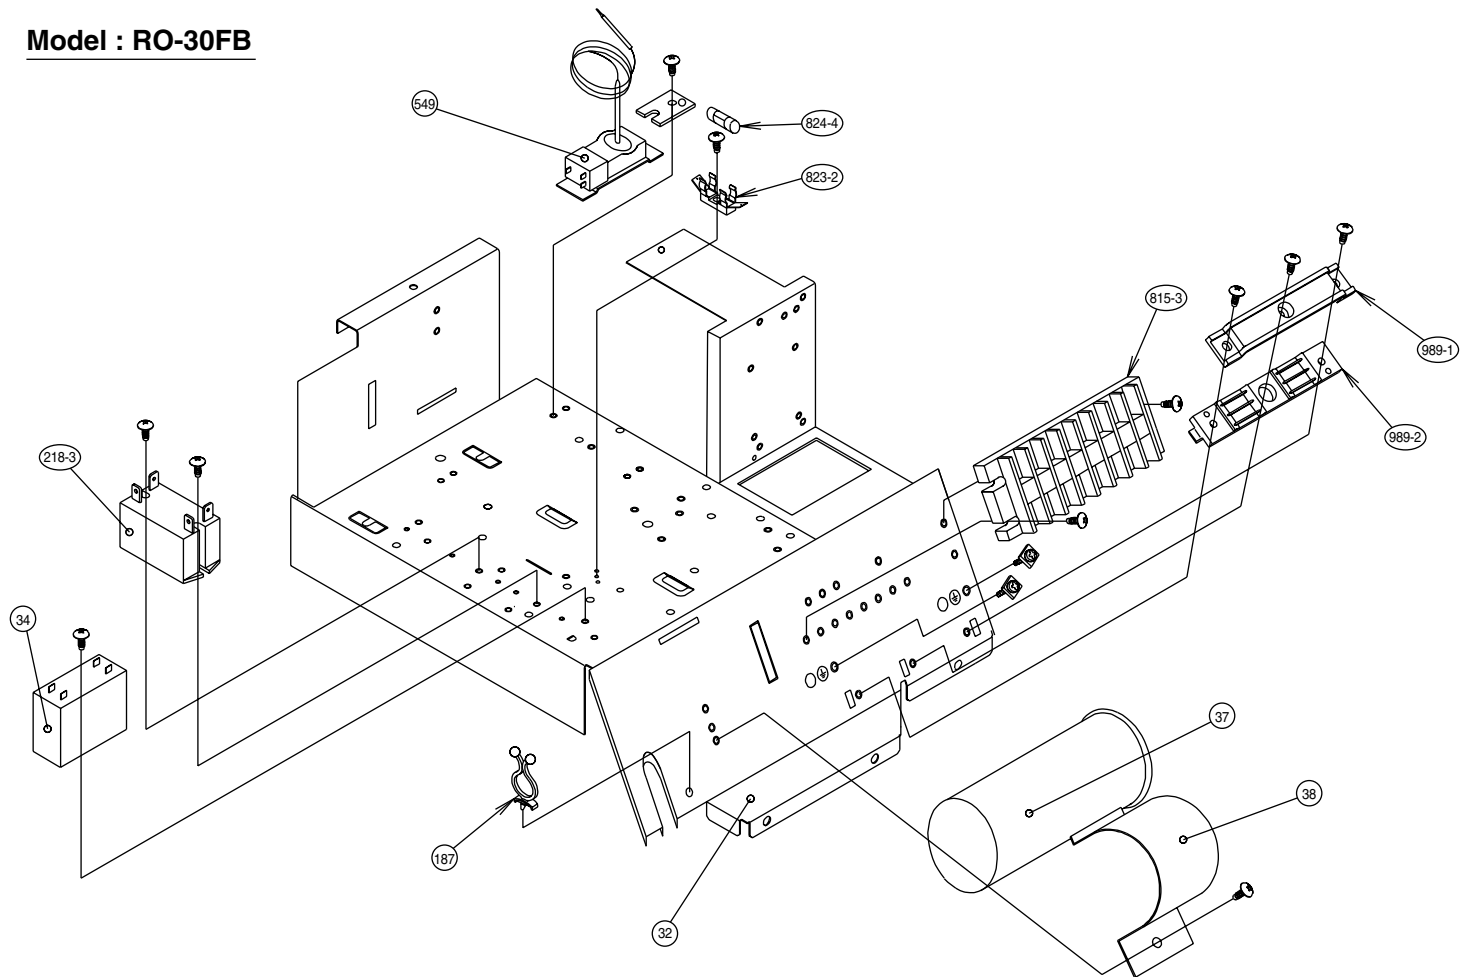



**Model : RO-30UB**

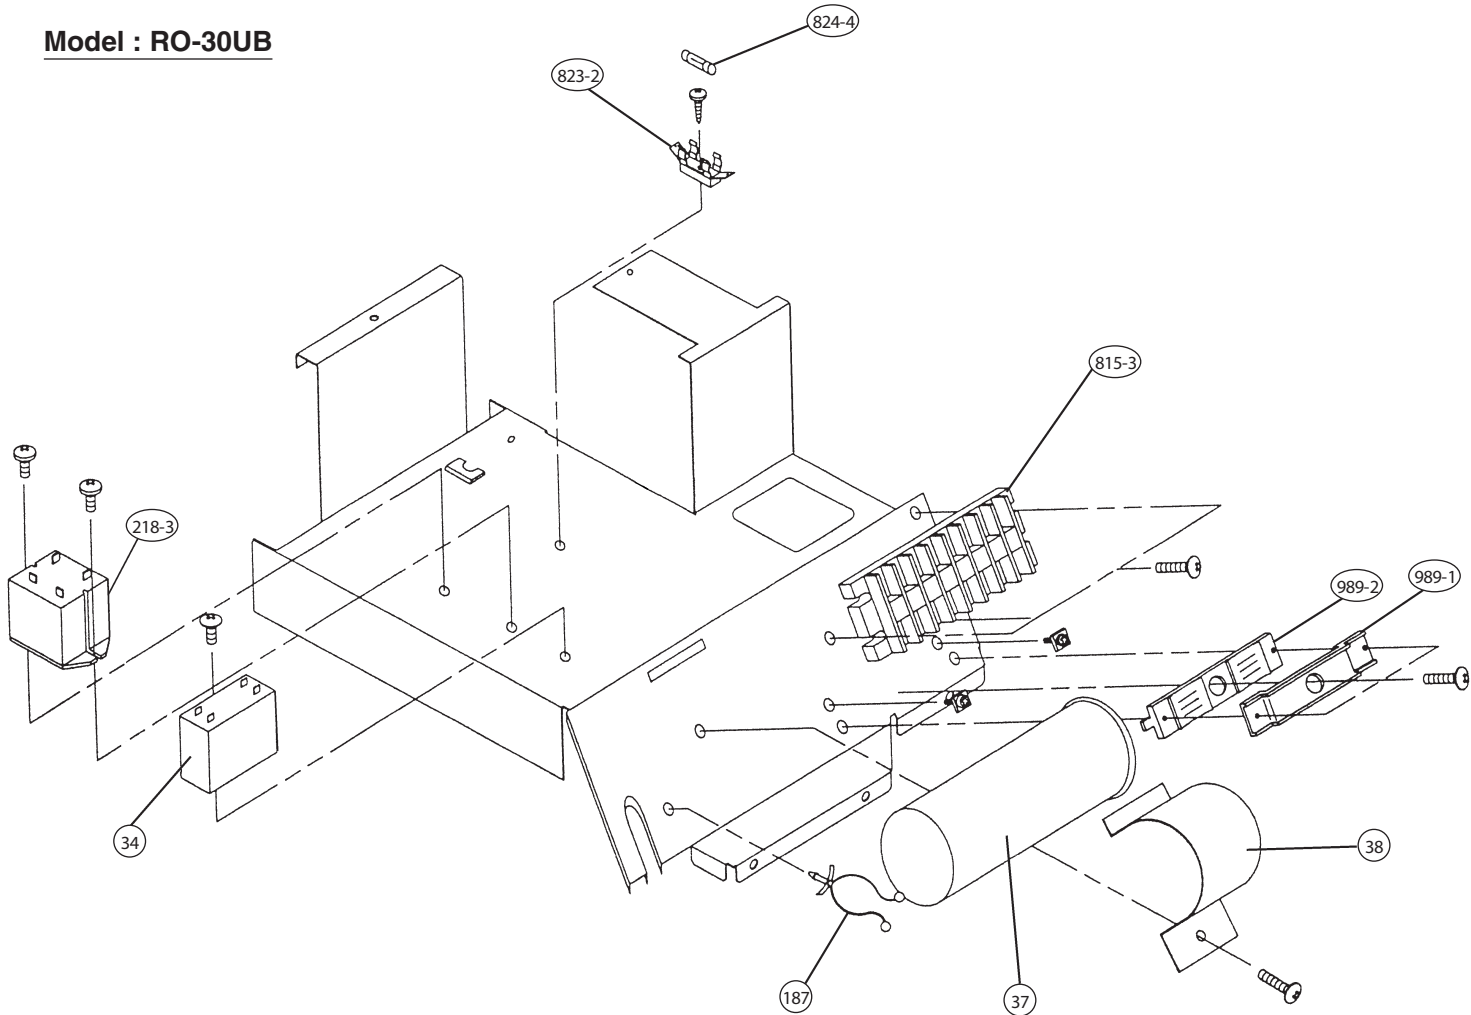



**Model : RO-18FA**

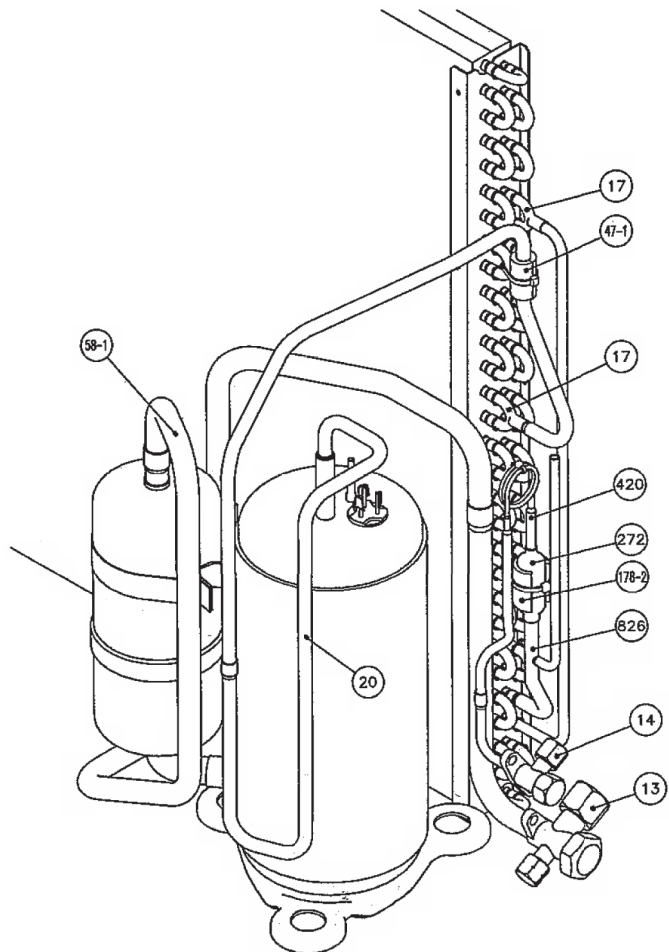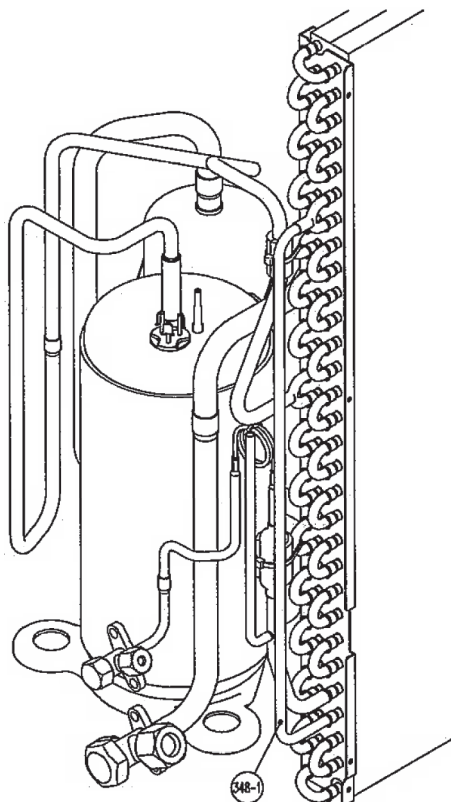



**Model : RO-18FB**

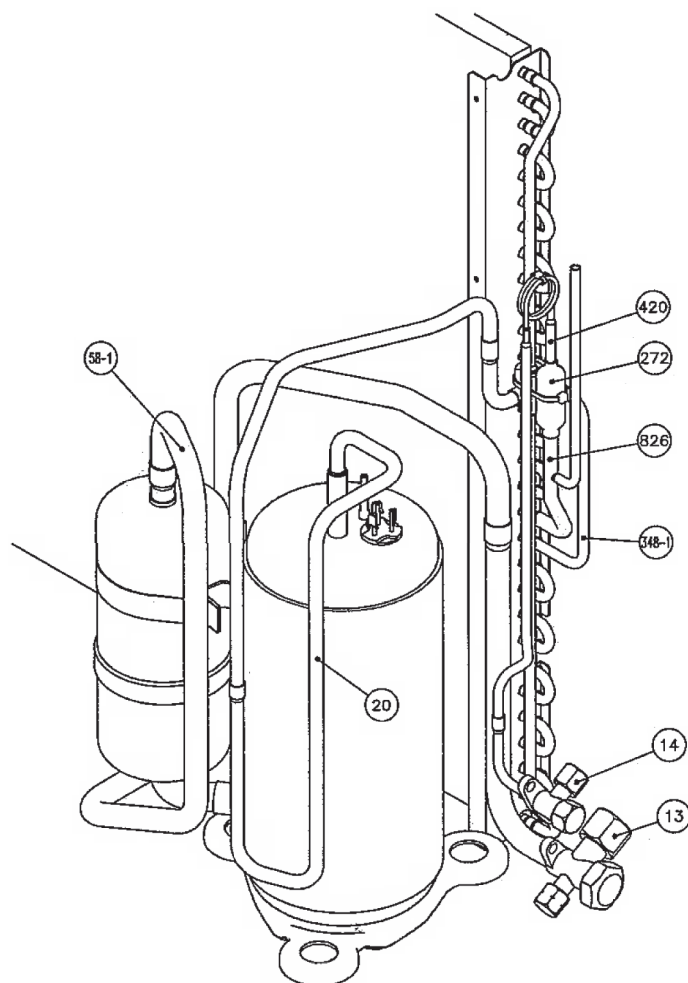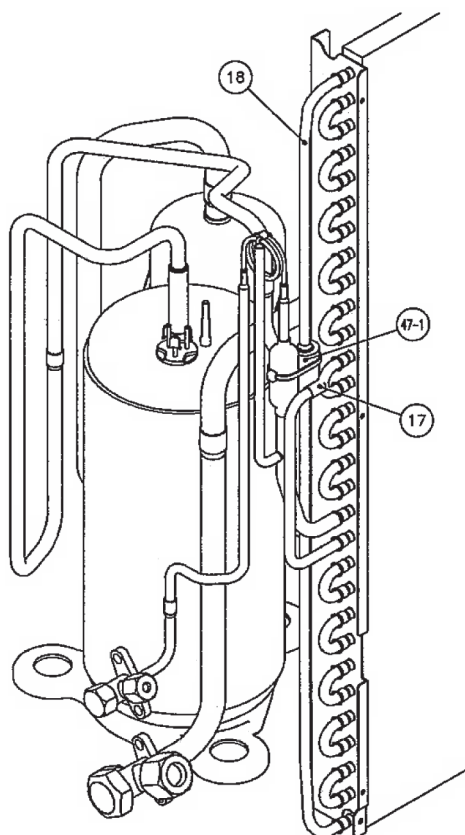


**Models : RO-18UA  
RO-18UB**

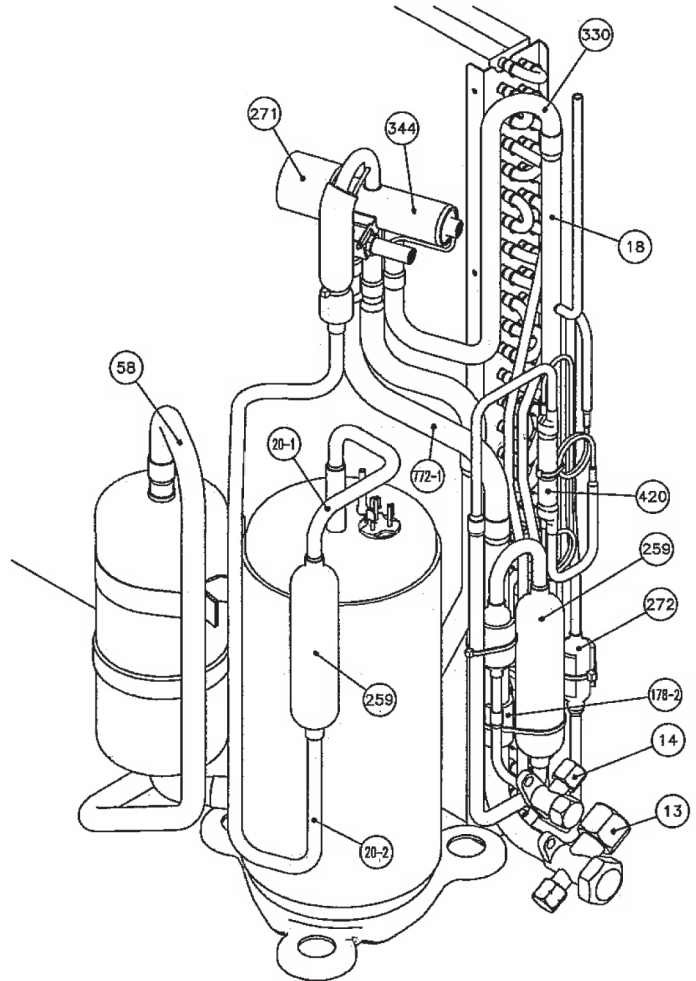
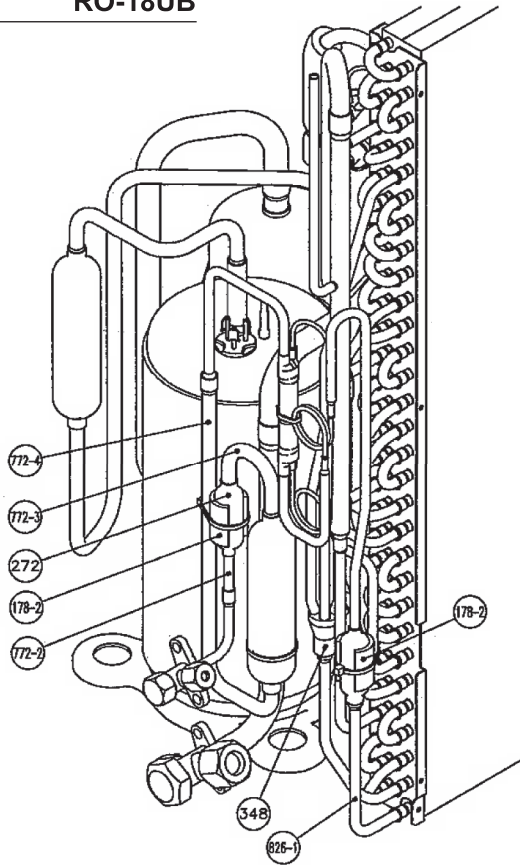


**Model : RO-24FB**

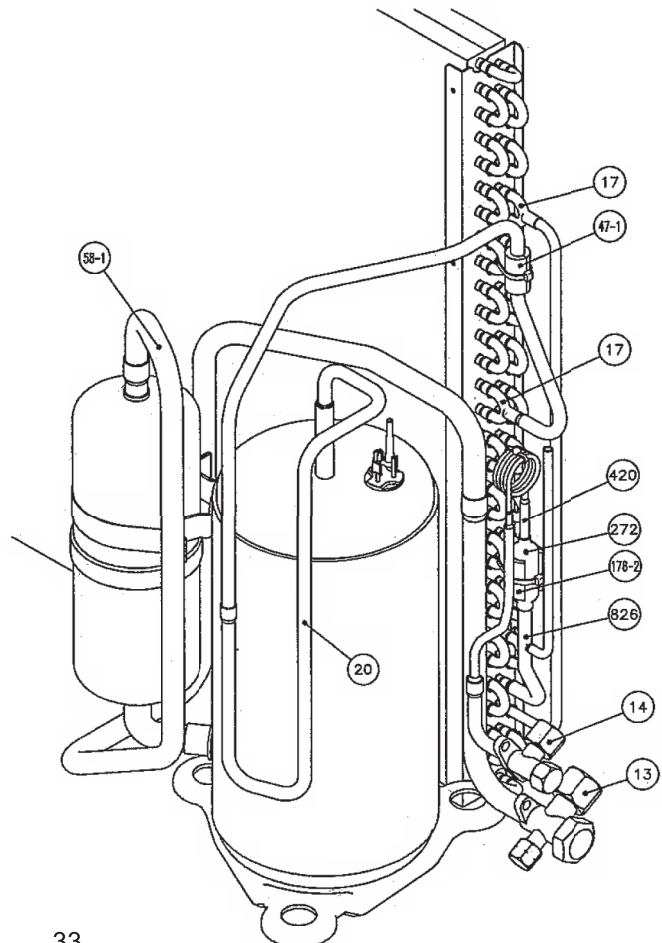
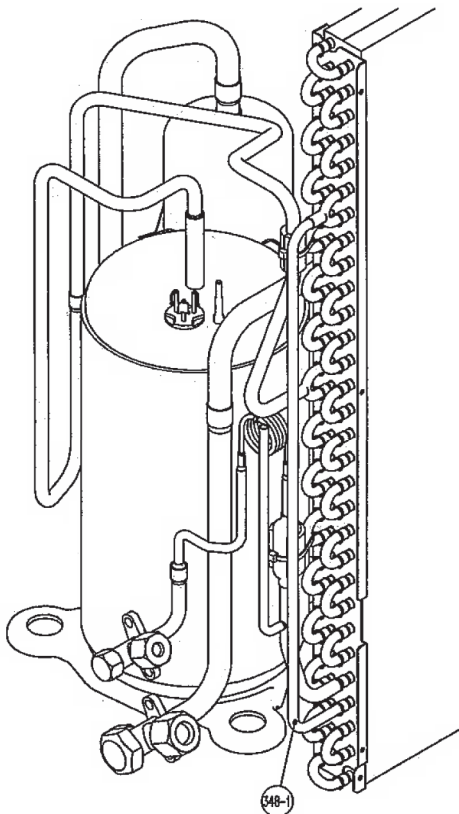


**Model : RO-24UB**

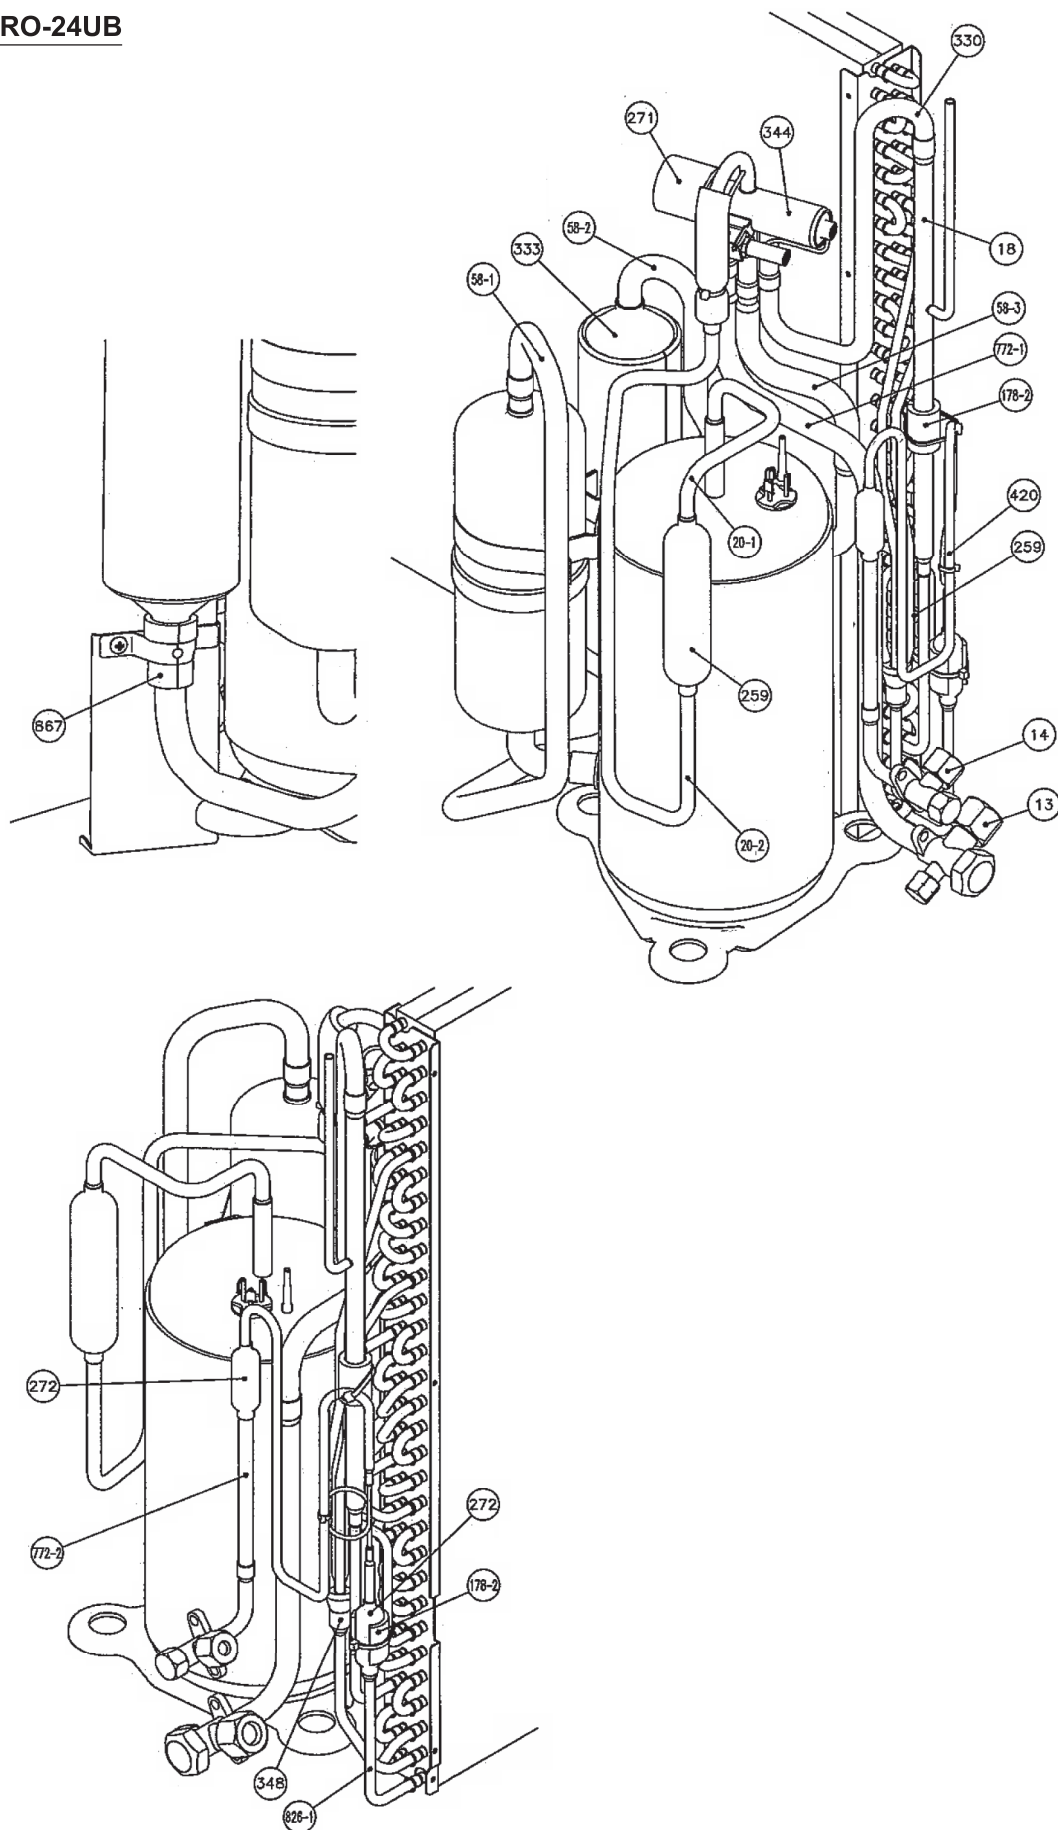

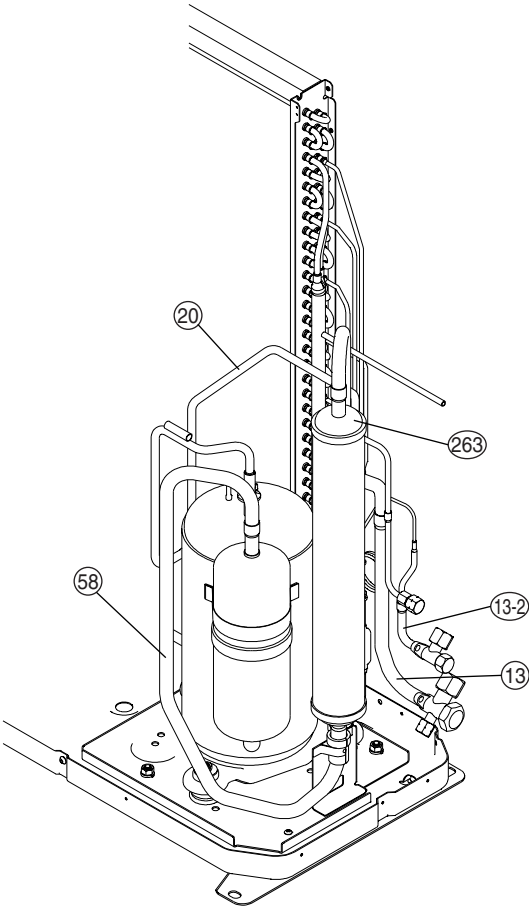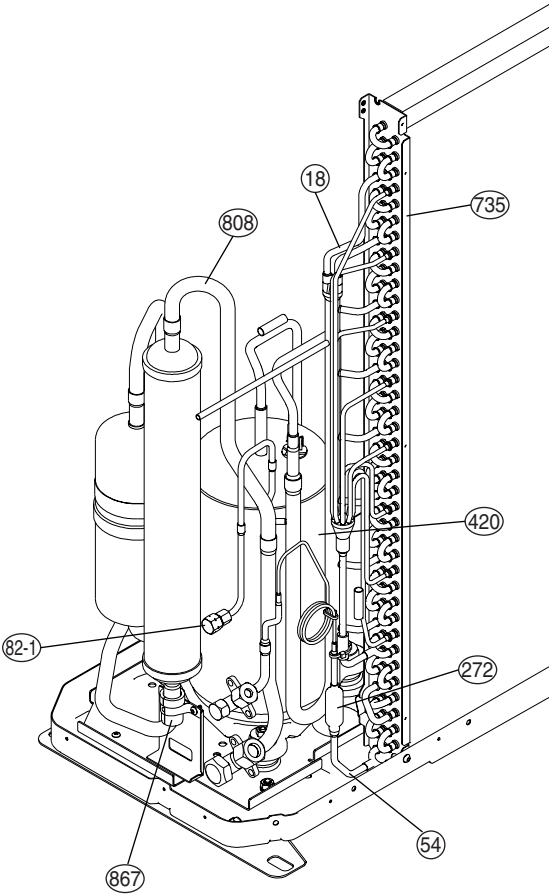

**Model : RO-30UB**

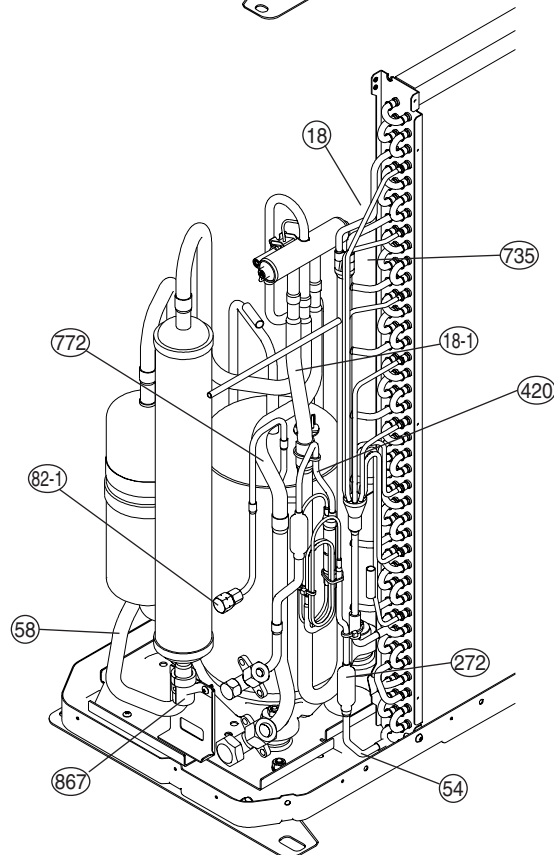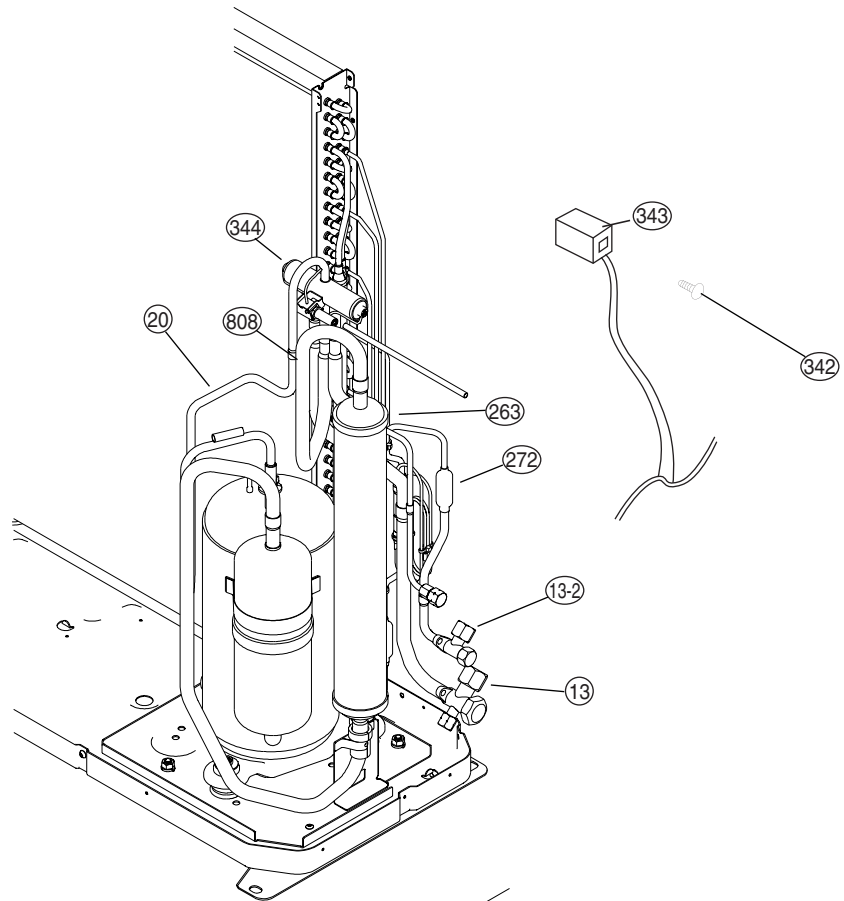

## PARTS LIST (Indoor unit)

When you order parts, please make a photocopy of this page and fill the number of the parts in the "Order" column.

| Ref.<br>No. | Description          | Part No.       |                |                | Ord.<br>Q'ty |
|-------------|----------------------|----------------|----------------|----------------|--------------|
|             |                      | RJ-18FA        | RJ-18FB        | RJ-24FB        |              |
| 8-2         | Filter Frame         | 9367681013     | 9367681013     | 9367681013     |              |
| 12          | Base-B               | 9368216016     | 9368216016     | 9368216016     |              |
| 32          | Control Box          | 9367663002     | 9367663002     | 9367663002     |              |
| 45          | Bracket (Eva. ) Assy | 9369317019     | 9369317019     | 9369317019     |              |
| 62          | Fan Motor-Inner      | 9601385011     | 9601385011     | 9601385011     |              |
| 63          | Front Cover Assy     | 9369194030     | 9369194030     | 9369194030     |              |
| 63-1        | Service Cover Assy   | 9368837013     | 9368837013     | 9368837013     |              |
| 67          | Rubber (Motor)       | 9367676002     | 9367676002     | 9367676002     |              |
| 69          | Louver               | 9367706013     | 9367706013     | 9367706013     |              |
| 70-1        | Hook (Cover)-L       | 9367675012     | 9367675012     | 9367675012     |              |
| 70-2        | Hook (Cover)-R       | 9367674015     | 9367674015     | 9367674015     |              |
| 92          | Link Arm             | 9367694006     | 9367694006     | 9367694006     |              |
| 93          | Filter               | 9367680016     | 9367680016     | 9367680016     |              |
| 108         | Base                 | 9367683017     | 9367683017     | 9367683017     |              |
| 108-1       | Base Assy            | 9368829056     | 9368829056     | 9368829056     |              |
| 108-2       | Base-B Sub Assy      | 9368843014     | 9368843014     | 9368843014     |              |
| 109         | Terminal CVR         | 9368022006     | 9368022006     | 9368022006     |              |
| 120         | Eva. Sub Assy        | 9368832070     | 9368832070     | 9368832070     |              |
| 122         | Rub (Bearing) Assy   | 9368998004     | 9368998004     | 9368998004     |              |
| 127         | Drain Hose           | 9367695003     | 9367695003     | 9367695003     |              |
| 146         | Evaporator Assy      | 9370583007     | 9370583007     | 9370583007     |              |
| 158         | Joint Pipe Assy      | 9372622018     | 9372622018     | 9369144004     |              |
| 160         | Drain Pan Assy       | 9368835026     | 9368835026     | 9368835026     |              |
| 165         | Motor Box            | 9367718009     | 9367718009     | 9367718009     |              |
| 169         | Cross Fan Assy       | 9367708000     | 9367708000     | 9367708000     |              |
| 172         | Pipe Bracket         | 9367844005     | 9367844005     | 9367844005     |              |
| 172-3       | Pipe Holder          | 9367687008     | 9367687008     | 9367687008     |              |
| 174-1       | Fixing Plate         | 9367987009     | 9367987009     | 9367987009     |              |
| 184-1       | Thermo. Spring-A     | 313728262708   | 313728262708   | 313728262708   |              |
| 199         | Step Motor           | 9900020019     | 9900020019     | 9900020019     |              |
| 230         | Diffusion Sheet      | 9368006013     | 9368006013     | 9368006013     |              |
| 234         | Thermistor Assy-Room | 9703299148     | 9703299148     | 9703299148     |              |
| 235         | Thermistor Assy-Pipe | 9703297038     | 9703297038     | 9703297038     |              |
| 236         | Controller PCB Assy  | 9704457073     | 9704457028     | 9704457011     |              |
|             |                      | (EZ-008LWSE-C) | (EZ-001EWSE-C) | (EZ-001DWSE-C) |              |
| 240         | Remote Control Unit  | 9368374020     | 9368374020     | 9368374020     |              |
| 253-1       | Wire With Connector  | 9704434012     | 9704434012     | 9704434012     |              |
| 253-2       | Wire With Connector  | 9704435019     | 9704435019     | 9704435019     |              |
| 253-3       | Wire With Connector  | 9704433015     | 9704433015     | 9704433015     |              |
| 320         | Upper Flap           | 9367688012     | 9367688012     | 9367688012     |              |
| 321         | Lower Flap           | 9367689019     | 9367689019     | 9367689019     |              |
| 329         | Coupling Pipe Assy   | 9370585001     | 9370585001     | 9370585001     |              |
| 338         | Motor Holder         | 9367798001     | 9367798001     | 9367798001     |              |
| 385         | Indicator PCB Assy   | 9704368010     | 9704368010     | 9704368010     |              |
| 407         | Motor Link           | 9367696000     | 9367696000     | 9367696000     |              |
| 407-2       | Louver Rod           | 9367698004     | 9367698004     | 9367698004     |              |
| 408         | Louver Link          | 9367697007     | 9367697007     | 9367697007     |              |
| 408-1       | Louver Link-B        | 9368789008     | 9368789008     | 9368789008     |              |
| 425         | Earth Plate          | 9368017002     | 9368017002     | 9368017002     |              |
| 428         | Screw Cover          | 9367717019     | 9367717019     | 9367717019     |              |
| 435         | Louver Spring        | 9369030000     | 9369030000     | 9369030000     |              |

| Ref.<br>No. | Description           | Part No.     |              |              | Ord.<br>Q'ty |
|-------------|-----------------------|--------------|--------------|--------------|--------------|
|             |                       | RJ-18FA      | RJ-18FB      | RJ-24FB      |              |
| 514         | Control Box Cover     | 9367664009   | 9367664009   | 9367664009   |              |
| 522-1       | Gear-A                | 9367691005   | 9367691005   | 9367691005   |              |
| 522-2       | Gear-B                | 9367692002   | 9367692002   | 9367692002   |              |
| 557         | Spring (Diffuser)     | 9368824006   | 9368824006   | 9368824006   |              |
| 574-1       | Eva. Support-R        | 9367684007   | 9367684007   | 9367684007   |              |
| 574-2       | Eva. Support-L        | 9367685004   | 9367685004   | 9367685004   |              |
| 627         | Link                  | 9367693009   | 9367693009   | 9367693009   |              |
| 629         | EMI Filter            | 0400056133   | 0400056133   | 0400056133   |              |
| 652-1       | Thermo. Holder Pipe   | 313806262805 | 313806262805 | 313806262805 |              |
| 735         | Distributor Assy      | 9370584004   | 9370584004   | 9370584004   |              |
| 743         | Remote Control Holder | 9305642014   | 9305642014   | 9305642014   |              |
| 759-1       | Intake Cover          | 9367678013   | 9367678013   | 9367678013   |              |
| 764         | Drain Cap             | 9367677009   | 9367677009   | 9367677009   |              |
| 815-1       | Terminal-3P           | 9306489090   | 9306489090   | 9306489090   |              |
| 855         | Display-F             | 9367672028   | 9367672028   | 9367672028   |              |
| 868         | PWB Holder (Display)  | 9367679003   | 9367679003   | 9367679003   |              |
| 875         | PCB Assy-Switch       | 9704370013   | 9704370013   | 9704370013   |              |
| 945         | Wire Holder           | 9368016005   | 9368016005   | 9368016005   |              |
| 960         | Diffuser Assy         | 9368840013   | 9368840013   | 9368840013   |              |
| 963         | Fan Guard             | 9368015008   | 9368015008   | 9368015008   |              |
| 963-1       | Fan Guard Holder      | 9367707003   | 9367707003   | 9367707003   |              |
| 973         | Gear Box              | 9367690008   | 9367690008   | 9367690008   |              |
| 998         | Bypass Pipe-A         | 9368857004   | 9368857004   | 9368857004   |              |
| 999         | Bypass Pipe-B         | 9368917005   | 9368917005   | 9368917005   |              |

When you order parts, please make a photocopy of this page and fill the number of the parts in the "Order" column.

| Ref.<br>No. | Description          | Part No.                      |                              |                              | Ord.<br>Q'ty |
|-------------|----------------------|-------------------------------|------------------------------|------------------------------|--------------|
|             |                      | RJ-18UA                       | RJ-18UB                      | RJ-24UB                      |              |
| 8-2         | Filter Frame         | 9367681013                    | 9367681013                   | 9367681013                   |              |
| 12          | Base-B               | 9368216016                    | 9368216016                   | 9368216016                   |              |
| 32          | Control Box          | 9367663002                    | 9367663002                   | 9367663002                   |              |
| 45          | Bracket (Eva.) Assy  | 9369317019                    | 9369317019                   | 9369317019                   |              |
| 62          | Fan Motor-Inner      | 9601385011                    | 9601385011                   | 9601385011                   |              |
| 63          | Front Cover Assy     | 9369194030                    | 9369194030                   | 9369194030                   |              |
| 63-1        | Service Cover Assy   | 9368837013                    | 9368837013                   | 9368837013                   |              |
| 67          | Rubber (Motor)       | 9367676002                    | 9367676002                   | 9367676002                   |              |
| 69          | Louver               | 9367706013                    | 9367706013                   | 9367706013                   |              |
| 70-1        | Hook (Cover)-L       | 9367675012                    | 9367675012                   | 9367675012                   |              |
| 70-2        | Hook (Cover)-R       | 9367674015                    | 9367674015                   | 9367674015                   |              |
| 92          | Link Arm             | 9367694006                    | 9367694006                   | 9367694006                   |              |
| 93          | Filter               | 9367680016                    | 9367680016                   | 9367680016                   |              |
| 108         | Base                 | 9367683017                    | 9367683017                   | 9367683017                   |              |
| 108-1       | Base Assy            | 9368829018                    | 9368829018                   | 9368829018                   |              |
| 108-2       | Base-B Sub Assy      | 9368843014                    | 9368843014                   | 9368843014                   |              |
| 109         | Terminal CVR         | 9368022006                    | 9368022006                   | 9368022006                   |              |
| 120         | Eva. Sub Assy        | 9368832070                    | 9368832070                   | 9368832070                   |              |
| 122         | Rub (Bearing) Assy   | 9368998004                    | 9368998004                   | 9368998004                   |              |
| 127         | Drain Hose           | 9367695003                    | 9367695003                   | 9367695003                   |              |
| 146         | Eveporator Assy      | 9368853006                    | 9368853006                   | 9370583007                   |              |
| 158         | Joint Pipe Assy      | 9372622018                    | 9372622018                   | 9369144004                   |              |
| 160         | Drain Pan Assy       | 9368835026                    | 9368835026                   | 9368835026                   |              |
| 165         | Motor Box            | 9367718009                    | 9367718009                   | 9367718009                   |              |
| 169         | Cross Fan Assy       | 9367708000                    | 9367708000                   | 9367708000                   |              |
| 172         | Pipe Bracket         | 9367844005                    | 9367844005                   | 9367844005                   |              |
| 172-3       | Pipe Holder          | 9367687008                    | 9367687008                   | 9367687008                   |              |
| 174-1       | Fixing Plate         | 9367987009                    | 9367987009                   | 9367987009                   |              |
| 184-1       | Thermo. Spring-A     | 313728262708                  | 313728262708                 | 313728262708                 |              |
| 199         | Stepping Motor       | 9900020019                    | 9900020019                   | 9900020019                   |              |
| 230         | Diffusion Sheet      | 9368006013                    | 9368006013                   | 9368006013                   |              |
| 234         | Thermistor Assy-Room | 9703299148                    | 9703299148                   | 9703299148                   |              |
| 235         | Thermistor Assy-Pipe | 9703297038                    | 9703297038                   | 9703297038                   |              |
| 236         | Controller PCB Assy  | 9704360137<br>(EZ-00304HSE-C) | 9704360120<br>(EZ-003BHSE-C) | 9704360014<br>(EZ-0017HSE-C) |              |
| 240         | Remote Control Unit  | 9371190013                    | 9371190013                   | 9371190013                   |              |
| 253-1       | Wire With Connector  | 9704434012                    | 9704434012                   | 9704434012                   |              |
| 253-2       | Wire With Connector  | 9704435019                    | 9704435019                   | 9704435019                   |              |
| 253-3       | Wire With Connector  | 9704433015                    | 9704433015                   | 9704433015                   |              |
| 320         | Upper Flap           | 9367688012                    | 9367688012                   | 9367688012                   |              |
| 321         | Lower Flap           | 9367689019                    | 9367689019                   | 9367689019                   |              |

| Ref.<br>No. | Description           | Part No.     |              |              | Ord.<br>Q'ty |
|-------------|-----------------------|--------------|--------------|--------------|--------------|
|             |                       | RJ-18UA      | RJ-18UB      | RJ-24UB      |              |
| 329         | Coupling Pipe Assy    | 9370585001   | 9370585001   | 9370585001   |              |
| 338         | Motor Holder          | 9367798001   | 9367798001   | 9367798001   |              |
| 385         | Indicator PCB Assy    | 9704368010   | 9704368010   | 9704368010   |              |
| 407         | Motor Link            | 9367696000   | 9367696000   | 9367696000   |              |
| 407-2       | Louver Rod            | 9367698004   | 9367698004   | 9367698004   |              |
| 408         | Louver Link           | 9367697007   | 9367697007   | 9367697007   |              |
| 408-1       | Louver Link-B         | 9368789008   | 9368789008   | 9368789008   |              |
| 425         | Earth Plate           | 9368017002   | 9368017002   | 9368017002   |              |
| 428         | Screw Cover           | 9367717019   | 9367717019   | 9367717019   |              |
| 435         | Louver Spring         | 9369030000   | 9369030000   | 9369030000   |              |
| 514         | Control Box Cover     | 9367664009   | 9367664009   | 9367664009   |              |
| 522-1       | Gear-A                | 9367691005   | 9367691005   | 9367691005   |              |
| 522-2       | Gear-B                | 9367692002   | 9367692002   | 9367692002   |              |
| 557         | Spring (Diffuser)     | 9368824006   | 9368824006   | 9368824006   |              |
| 574-1       | Eva Support-R         | 9367684007   | 9367684007   | 9367684007   |              |
| 574-2       | Eva. Support-L        | 9367685004   | 9367685004   | 9367685004   |              |
| 627         | Link                  | 9367693009   | 9367693009   | 9367693009   |              |
| 629         | EMI Filter            | 0400056133   | 0400056133   | 0400056133   |              |
| 652-1       | Thrm. Holder Pipe     | 313806262805 | 313806262805 | 313806262805 |              |
| 735         | Distributor Assy      | 9370584004   | 9370584004   | 9370584004   |              |
| 743         | Remote Control Holder | 9305642014   | 9305642014   | 9305642014   |              |
| 759-1       | Intake Cover          | 9367678013   | 9367678013   | 9367678013   |              |
| 764         | Drain Cap             | 9367677009   | 9367677009   | 9367677009   |              |
| 815         | Terminal              | 9900016012   | 9900016012   | 9900016012   |              |
| 855         | Display-F             | 9367672028   | 9367672028   | 9367672028   |              |
| 868         | PWB Holder (Display)  | 9367679003   | 9367679003   | 9367679003   |              |
| 875         | PCB Assy-Switch       | 9704370013   | 9704370013   | 9704370013   |              |
| 945         | Wire Holder           | 9368016005   | 9368016005   | 9368016005   |              |
| 960         | Diffser Assy          | 9368840013   | 9368840013   | 9368840013   |              |
| 963         | Fanguard              | 9368015008   | 9368015008   | 9368015008   |              |
| 963-1       | Fanguard Holder       | 9367707003   | 9367707003   | 9367707003   |              |
| 973         | Gear Box              | 9367690008   | 9367690008   | 9367690008   |              |

When you order parts, please make a photocopy of this page and fill the number of the parts in the "Order" column.

| Ref.<br>No. | Description                     | Part No.       | Ord.<br>Q'ty |
|-------------|---------------------------------|----------------|--------------|
|             |                                 | <b>RJ-30FB</b> |              |
| 8-2         | Filter Frame                    | 9367681013     |              |
| 12          | Base-B                          | 9368216016     |              |
| 32          | Control Box                     | 9367663002     |              |
| 45          | Bracket (Eva. ) Assy            | 9369317019     |              |
| 62          | Fan Motor-Inner                 | 9601385011     |              |
| 63          | Front Cover-F Assy              | 9369194030     |              |
| 63-1        | Service Cover Assy              | 9368837013     |              |
| 67          | Rubber (Motor)                  | 9367676002     |              |
| 69          | Louver                          | 9367706013     |              |
| 70-1        | Hook (Cover)-L                  | 9367675012     |              |
| 70-2        | Hook (Cover)-R                  | 9367674015     |              |
| 92          | Link Holder                     | 9367694006     |              |
| 93          | Filter                          | 9367680016     |              |
| 108         | Base                            | 9367680317     |              |
| 108-1       | Base Assy                       | 9368829049     |              |
| 108-2       | Base-B Sub Assy                 | 9368843014     |              |
| 109         | Terminal CVR                    | 9368022006     |              |
| 120         | Eva. Sub Assy                   | 9368832056     |              |
| 122         | Rub (Bearing) Assy              | 9368998004     |              |
| 127         | Drain Hose                      | 9367695003     |              |
| 146         | Evaporator Assy                 | 9370559002     |              |
| 146-1       | Evaporator Assy -B              | 9369124006     |              |
| 158         | Joint Pipe Assy                 | 9369144004     |              |
| 160         | Drain Pan Assy                  | 9368835019     |              |
| 165         | Motor Box                       | 9367718009     |              |
| 169         | Cross Flow Fan Assy             | 9367708000     |              |
| 172         | Pipe Bracket                    | 9367844005     |              |
| 172-3       | Pipe Holder                     | 9367687008     |              |
| 174-1       | Fixing Plate                    | 9367987009     |              |
| 184-1       | Thermo. Spring-A                | 313728262708   |              |
| 199         | Step Motor                      | 9900020019     |              |
| 230         | Diffusion Sheet                 | 9368006013     |              |
| 234         | Thermistor Assy-Room            | 9703299148     |              |
| 235         | Thermistor Assy-Pipe            | 9703297038     |              |
| 236         | Controller PCB Assy             | 9704457059     |              |
| 240         | Remote Control Unit             | 9371190020     |              |
| 253-1       | Wire with Connector             | 9704434012     |              |
| 253-2       | Wire with Connector             | 9704435019     |              |
| 253-3       | Wire with Connector             | 9704433015     |              |
| 320         | Upper Flap                      | 9367688012     |              |
| 321         | Lower Flap                      | 9367689019     |              |
| 329         | Coupling Pipe Assy              | 9370551005     |              |
| 338         | Motor Holder                    | 9367798001     |              |
| 385         | Indicator PCB Assy              | 9704368010     |              |
| 407         | Motor Link                      | 9367696000     |              |
| 407-2       | Louver Rod                      | 9367698004     |              |
| 408         | Louver Link                     | 9367697007     |              |
| 408-1       | Louver Link-B                   | 9368789008     |              |
| 425         | Earth Plate                     | 9368017002     |              |
| 428         | Screw Cover                     | 9367717019     |              |
| 435         | Louver Spring                   | 9369030000     |              |
| 514         | Control Box Cover               | 9367664009     |              |
| 522-1       | Gear-A                          | 9367691005     |              |
| 522-2       | Gear-B                          | 9367692002     |              |
| 557         | (Spring) Diffuser               | 9368824006     |              |
| 574-1       | Evaporator Support-R            | 9367684007     |              |
| 574-2       | Evaporator Support-L            | 9367685004     |              |
| 588         | Evaporator Holder               | 9367711000     |              |
| 588-1       | Evaporator Holder-B             | 9368783006     |              |
| 627         | Link                            | 9367693009     |              |
| 629         | EMI Filter                      | 0400056133     |              |
| 652-1       | Thrm. Holder Pipe               | 313806262805   |              |
| 735         | Distributor Assy                | 9370560008     |              |
| 743         | Remote Control Unit Holder Case | 9305642014     |              |
| 759-1       | Intake Cover                    | 9367678013     |              |
| 764         | Drain Cap                       | 9367677009     |              |
| 815-1       | Terminal-3P                     | 9306489090     |              |
| 855         | Display-F                       | 9367672028     |              |
| 875         | PCB Assy-Switch                 | 9704370013     |              |
| 945         | Wire Holder                     | 9368016005     |              |
| 960         | Diffuser Assy                   | 9368840013     |              |
| 963         | Fan Guard                       | 9368015008     |              |
| 963-1       | Fan Guard Holder                | 9367707003     |              |
| 973         | Gear Box                        | 9367690008     |              |

When you order parts, please make a photocopy of this page and fill the number of the parts in the "Order" column.

| Ref.  | Description           | Part No.     | Ord. |
|-------|-----------------------|--------------|------|
| No.   |                       | RJ-30UB      | Q'ty |
| 8-2   | Filter Frame          | 9367681013   |      |
| 12    | Base-B                | 9368216016   |      |
| 32    | Control Box           | 9367663002   |      |
| 45    | Bracket (Eva.) Assy   | 9369317019   |      |
| 62    | Fan Motor-Inner       | 9601385011   |      |
| 63    | Front Cover Assy      | 9369194030   |      |
| 63-1  | Service Cover Assy    | 9368837013   |      |
| 67    | Rubber (Motor)        | 9367676002   |      |
| 69    | Louver                | 9367706013   |      |
| 70-1  | Hook (Cover)-L        | 9367675012   |      |
| 70-2  | Hook (Cover)-R        | 9367674015   |      |
| 92    | Link Arm              | 9367694006   |      |
| 93    | Filter                | 9367680016   |      |
| 108   | Base                  | 9367683017   |      |
| 108-1 | Base Assy             | 9368829018   |      |
| 108-2 | Base-B Sub Assy       | 9368843014   |      |
| 109   | Terminal CVR          | 9368022006   |      |
| 120   | Eva. Sub Assy         | 9368832056   |      |
| 122   | Rub (Bearing) Assy    | 9368998004   |      |
| 127   | Drain Hose            | 9367695003   |      |
| 146   | Eveporator Assy       | 9370559002   |      |
| 146-1 | Eveporator Assy-B     | 9369124006   |      |
| 158   | Joint Pipe Assy       | 9369144004   |      |
| 160   | Drain Pan Assy        | 9368835026   |      |
| 165   | Motor Box             | 9367718009   |      |
| 169   | Cross Fan Assy        | 9367708000   |      |
| 172   | Pipe Bracket          | 9367844005   |      |
| 172-3 | Pipe Holder           | 9367687008   |      |
| 174-1 | Fixing Plate          | 9367987009   |      |
| 184-1 | Thermo. Spring-A      | 313728262708 |      |
| 199   | Stepping Motor        | 9900020019   |      |
| 230   | Diffusion Sheet       | 9368006013   |      |
| 234   | Thermistor Assy-Room  | 9703299148   |      |
| 235   | Thermistor Assy-Pipe  | 9703297038   |      |
| 236   | Controller PCB Assy   | 9704360052   |      |
| 240   | Remote Control Unit   | 9371190013   |      |
| 253-1 | Wire With Connector   | 9704434012   |      |
| 253-2 | Wire With Connector   | 9704435019   |      |
| 253-3 | Wire With Connector   | 9704433015   |      |
| 320   | Upper Flap            | 9367688012   |      |
| 321   | Lower Flap            | 9367689019   |      |
| 329   | Coupling Pipe Assy    | 9370561005   |      |
| 338   | Motor Holder          | 9367798001   |      |
| 385   | Indicator PCB Assy    | 9704368010   |      |
| 407   | Motor Link            | 9367696000   |      |
| 407-2 | Louver Rod            | 9367698004   |      |
| 408   | Louver Link           | 9367697007   |      |
| 408-1 | Louver Link-B         | 9368789008   |      |
| 425   | Earth Plate           | 9368017002   |      |
| 428   | Screw Cover           | 9367717019   |      |
| 435   | Louver Spring         | 9369030000   |      |
| 514   | Control Box Cover     | 9367664009   |      |
| 522-1 | Gear-A                | 9367691005   |      |
| 522-2 | Gear-B                | 9367692002   |      |
| 557   | Spring (Diffuser)     | 9368824006   |      |
| 574-1 | Eva Support-R         | 9367684007   |      |
| 574-2 | Eva. Support-L        | 9367685004   |      |
| 588   | Eva. Holder           | 9367711000   |      |
| 588-1 | Eva. Holder-B         | 9368783006   |      |
| 627   | Link                  | 9367693009   |      |
| 629   | EMI Filter            | 0400056133   |      |
| 652-1 | Thrm. Holder Pipe     | 313806262805 |      |
| 735   | Distributor Assy      | 9370560008   |      |
| 743   | Remote Control Holder | 9305642014   |      |
| 759-1 | Intake Cover          | 9367678013   |      |
| 764   | Drain Cap             | 9367677009   |      |
| 815   | Terminal              | 9900016012   |      |
| 855   | Display-F             | 9367672028   |      |
| 868   | PWB Holder (Display)  | 9367679003   |      |
| 875   | PCB Assy-Switch       | 9704370013   |      |
| 945   | Wire Holder           | 9368016005   |      |
| 960   | Diffser Assy          | 9368840013   |      |
| 963   | Fanguard              | 9368015008   |      |
| 963-1 | Fanguard Holder       | 9367707003   |      |
| 973   | Gear Box              | 9367690008   |      |

## PARTS LIST (Outdoor unit)

When you order parts, please make a photocopy of this page and fill the number of the parts in the "Order" column.

| Ref. No. | Description               | Part No.     |              |              | Ord. Q'ty |
|----------|---------------------------|--------------|--------------|--------------|-----------|
|          |                           | RO-18FA      | RO-18FB      | RO-24FB      |           |
| 2        | Fan Guard                 | 9371187013   | 9371187013   | 9371187013   |           |
| 4        | Emblem-Rear               | 9361328006   | 9361328006   | 9361328006   |           |
| 5        | Front Panel Ptd           | 9371924014   | 9371924014   | 9371924014   |           |
| 7        | Connector Cover (Cabinet) | 9366398004   | 9366398004   | 9366398004   |           |
| 8        | Wire Assy (Comp)          | 9372334010   | 9372334010   | 9372334010   |           |
| 9        | Side Panel R Ptd          | 9371927015   | 9371927015   | 9371927015   |           |
| 12       | Base Assy, Ptd            | 9371920054   | 9371920054   | 9371920016   |           |
| 13-1     | 3-Way Valve Assy          | 9372205013   | 9372205013   | 9372205013   |           |
| 13-2     | 2-Way Valve Assy          | 9372204016   | 9372204016   | 9372204023   |           |
| 16       | Condenser Assy            | 9372181027   | 9372181041   | 9372181027   |           |
| 26       | Compressor Cover          | 9372327012   | 9372327012   | 9372327012   |           |
| 29       | Separate Wall             | 9371933016   | 9371933016   | 9371933016   |           |
| 32       | Control Box               | 9371935010   | 9371935010   | 9371935010   |           |
| 34       | Capacitor, Plastic        | 9900130022   | 9900130022   | 9900130022   |           |
| 37       | Running Capacitor         | 9703107122   | 9703107122   | 9703107023   |           |
| 38       | Capacitor Clamp Metal     | 9351770013   | 9351770013   | 313791061807 |           |
| 39       | Propeller Fan Assy        | 9366378013   | 9366378013   | 9366378013   |           |
| 41       | Motor Induct              | 9601671022   | 9601671022   | 9601671022   |           |
| 45-1     | Motor Bracket             | 9371929019   | 9371929019   | 9371929019   |           |
| 45-2     | Motor Bracket-Top         | 9371931012   | 9371931012   | 9371931012   |           |
| 45-3     | Motor Bracket Ctr         | 9371930015   | 9371930015   | 9371930015   |           |
| 45-4     | Motor Bracket Bottom      | 9371932019   | 9371932019   | 9371932019   |           |
| 46       | Compressor Assy           | 9372333013   | 9372558027   | 9372558010   |           |
| 47-1     | Rubber (Discharge Pipe)   | 313194159807 | 313194159807 | 313194159807 |           |
| 51       | Special Nut M5            | 9300301015   | 9300301015   | 9300301015   |           |
| 55       | Special Nut M8            | 9355091008   | 9355091008   | 9355091008   |           |
| 64       | Side Panel L Ptd          | 9371926018   | 9371926018   | 9371926018   |           |
| 69-3     | Bolt, Hex. Socket         | 301210060360 | 301210060360 | 301210060360 |           |
| 85       | Valve Plate Ptd           | 9371928012   | 9371928012   | 9371928012   |           |
| 107      | Rubber Seat-A             | 9351049010   | 9351049010   | 9351049010   |           |
| 109      | Termminal Cover (Comp)    | 9371511016   | 9371511016   | 9371511016   |           |
| 187      | Clip (Cable)              | 9352715006   | 9352715006   | 9352715006   |           |
| 218-3    | Relay                     | 9900074012   | 9900074012   | 9900074012   |           |
| 272      | Strainer                  | 9369287008   | 9369287008   | 9369287008   |           |
| 412      | Cover Gasket (Comp.)      | 9371512013   | 9371512013   | 9371512013   |           |
| 527      | Protectiive Net           | 9371934013   | 9371934013   | 9371934013   |           |
| 734      | Top Plate                 | 9371925011   | 9371925011   | 9371925011   |           |
| 735-3    | Capillary Assy            | 9372197035   | 9372197066   | 9372197059   |           |
| 754      | Terminal Gask. Washer     | 9351053017   | 9351053017   | 9351053017   |           |
| 815      | Terminal-5P               | 9356497021   | 9356497021   | 9356497021   |           |
| 823-3    | Fuse Holder               | 0500063024   | 0500063024   | 0500063024   |           |
| 824-4    | Fuse                      | 0600222529   | 0600222529   | 0600222529   |           |
| 982-1    | Cord Clamp-A              | 9359822011   | 9359822011   | 9359822011   |           |
| 982-2    | Cord Clamp-B              | 9359823018   | 9359823018   | 9359823018   |           |

When you order parts, please make a photocopy of this page  
and fill the number of the parts in the "Order" column.

| Ref.<br>No. | Description               | Part No.     |              |              | Ord.<br>Qty |
|-------------|---------------------------|--------------|--------------|--------------|-------------|
|             |                           | RO-18UA      | RO-18UB      | RO-24UB      |             |
| 2           | Fan Guard                 | 9371187013   | 9371187013   | 9371187013   |             |
| 4           | Emblem-Rear               | 9361328006   | 9361328006   | 9361328006   |             |
| 5           | Front Panel Ptd           | 9371924014   | 9371924014   | 9371924014   |             |
| 7           | Connector Cover (Cabinet) | 9366398004   | 9366398004   | 9366398004   |             |
| 8           | Wire Assy (Comp)          | 9372334010   | 9372334010   | 9372334010   |             |
| 9           | Side Panel R Ptd          | 9371927015   | 9371927015   | 9371927015   |             |
| 12          | Base Assy, Ptd            | 9371920054   | 9371920054   | 9371920016   |             |
| 13-1        | 3-Way Valve Assy          | 9372205013   | 9372205013   | 9372205013   |             |
| 13-2        | 2-Way Valve Assy          | 9372204016   | 9372204016   | 9372204023   |             |
| 16          | Condenser Assy            | 9372181010   | 9372181034   | 9372181010   |             |
| 26          | Compressor Cover A        | 9372327012   | 9372327012   | 9372327012   |             |
| 29          | Separate Wall             | 9371933016   | 9371933016   | 9371933016   |             |
| 32          | Control Box               | 9371935010   | 9371935010   | 9371935010   |             |
| 34          | Capacitor, Plastic        | 9900130022   | 9900130022   | 9900130022   |             |
| 37          | Running Capacitor         | 9703107122   | 9703107122   | 9703107023   |             |
| 38          | Capacitor Clamp Metal     | 9351770013   | 9351770013   | 313791061807 |             |
| 39          | Propeller Fan Assy        | 9366378013   | 9366378013   | 9366378013   |             |
| 41          | Motor Induct              | 9601671015   | 9601671015   | 9601671015   |             |
| 45-1        | Motor Bracket             | 9371929019   | 9371929019   | 9371929019   |             |
| 45-2        | Motor Bracket-Top         | 9371931012   | 9371931012   | 9371931012   |             |
| 45-3        | Motor Bracket Ctr         | 9371930015   | 9371930015   | 9371930015   |             |
| 45-4        | Motor Bracket Bottom      | 9371932019   | 9371932019   | 9371932019   |             |
| 46          | Compressor Assy           | 9372333013   | 9372558027   | 9372558010   |             |
| 51          | Special Nut M5            | 9300301015   | 9300301015   | 9300301015   |             |
| 55          | Special Nut M8            | 9355091008   | 9355091008   | 9355091008   |             |
| 64          | Side Panel L Ptd          | 9371926018   | 9371926018   | 9371926018   |             |
| 69-3        | Bolt, Hex. Socket         | 301210060360 | 301210060360 | 301210060360 |             |
| 85          | Valve Plate Ptd           | 9371928012   | 9371928012   | 9371928012   |             |
| 107         | Rubber Seat-A             | 9351049010   | 9351049010   | 9351049010   |             |
| 109         | Teminal Cover (Comp)      | 9371511016   | 9371511016   | 9371511016   |             |
| 187         | Clip (Cable)              | 9352715006   | 9352715006   | 9352715006   |             |
| 199         | Br Sheet                  | 9363708059   | 9363708059   | -----        |             |
| 218-3       | Relay                     | 9900074012   | 9900074012   | 9900074012   |             |
| 218-4       | Power Relay               | 9900008017   | -----        | -----        |             |
| 259         | Muffler                   | 9372369012   | 9372369012   | -----        |             |
| 271         | 4-Way Valve Rubber        | 313728251908 | 313728251908 | 313728251908 |             |
| 272         | Strainer                  | 9369287008   | 9369287008   | 9369287008   |             |
| 333         | Accumulator               | -----        | -----        | 9368391003   |             |
| 343         | Solenoid                  | 9900165017   | 9900165017   | 9900165017   |             |
| 344         | 4-Way Valve               | 9970036019   | 9970036019   | 9900163013   |             |
| 361         | Accum Support Assy        | -----        | -----        | 9372252017   |             |
| 412         | Cover Gasket (Comp.)      | 9371512013   | 9371512013   | 9371512013   |             |
| 413         | Heater (Crank Case)       | 9900132033   | -----        | -----        |             |
| 527         | Protectiive Net           | 9371934013   | 9371934013   | 9371934013   |             |
| 734         | Top Panel                 | 9371925011   | 9371925011   | 9371925011   |             |
| 735-3       | Capillary Assy            | 9372197011   | 9372197042   | 9372197028   |             |
| 754         | Terminal Gask. Washer     | 9351053017   | 9351053017   | 9351053017   |             |
| 815-3       | Terminal-5P               | 9358660119   | 9358660119   | 9358660119   |             |
| 823-2       | Fuse Holder               | 0500063024   | 0500063024   | 0500063024   |             |
| 824-4       | Fuse                      | 0600222529   | 0600222529   | 0600222529   |             |
| 982-1       | Cord Clamp-A              | 9359822011   | 9359822011   | 9359822011   |             |
| 982-2       | Cord Clamp-B              | 9359823018   | 9359823018   | 9359823018   |             |

When you order parts, please make a photocopy of this page and fill the number of the parts in the "Order" column.




| Ref. No. | Description                    | Part No.   | Ord. Q'ty | Ref. No. | Description               | Part No.     | Ord. Q'ty |
|----------|--------------------------------|------------|-----------|----------|---------------------------|--------------|-----------|
|          |                                | RO-30FB    |           |          |                           | RO-30FB      |           |
| 2        | Fan Cover (Guard)              | 9371187013 |           | 83       | Check Joint Bracket       | 9359807025   |           |
| 4        | Emblem-Rear                    | 9361328006 |           | 84       | Valve Cover               | 9359817017   |           |
| 5        | Cabinet-A, Painted             | 9359797029 |           | 85       | Valve Fixing Plate        | 9359806011   |           |
| 8        | Comp Wire                      | 9370945072 |           | 107      | Rubber Mount              | 9351049010   |           |
| 9        | Cabinet-B, Painted             | 9359798026 |           | 109      | Terminal Cover            | 9371511016   |           |
| 12       | Base Assy, Painted             | 9359813019 |           | 117-3    | Hex. Nut w/Sp. Washer     | 301721180114 |           |
| 13       | 3-Way Valve Assy (5/8)         | 9372205037 |           | 187      | Clamp No.1219             | 313361271706 |           |
| 13-2     | 2-Way Valve Assy (3/8)         | 9372204047 |           | 218-3    | Power Relay               | 9900074012   |           |
| 16       | Condenser Assy                 | 9372866016 |           | 263      | Accumulator               | 9385005006   |           |
| 18       | Inlet Pipe (Condenser) Assy    | 9372185049 |           | 272      | Strainer                  | 9369287008   |           |
| 20       | Discharge Pipe                 | 9369047008 |           | 328      | Comp. Plate Assy          | 9362273060   |           |
| 26       | Comp. Cover                    | 9369093005 |           | 373      | Grip                      | 9352157004   |           |
| 29       | Separate Wall                  | 9359804017 |           | 407      | Clamp (Cable) No.1259     | 313739340109 |           |
| 32       | Control Box Metal              | 9359839019 |           | 412      | Cover Gasket              | 9371512013   |           |
| 34       | Capacitor (Fan Motor)          | 9357965024 |           | 420      | Capillary Assy            | 9371287119   |           |
| 37       | Running Capacitor              | 9703107092 |           | 477      | Bell-mouth                | 9359809012   |           |
| 38       | Capacitor Clamp                | 9351770013 |           | 527      | Protection Net            | 9359844013   |           |
| 39       | Propeller Fan                  | 9359837015 |           | 549      | Thermostat-Outdoor        | 9352553004   |           |
| 41       | Fan Motor Assy-Out (MFB-30DFT) | 9600832011 |           | 653-1    | Cup Screw                 | 9385089020   |           |
| 45-1     | Motor Bracket-A                | 9369627002 |           | 734      | Cabinet Top Plate Panel   | 9359799023   |           |
| 45-2     | Motor Bracket-B                | 9369628009 |           | 735      | Disributor Assy           | 9372867013   |           |
| 45-3     | Motor Bracket-C                | 9369629006 |           | 754      | Gasket Washer             | 9351053017   |           |
| 45-4     | Motor Bracket-D                | 9369630002 |           | 808      | Inlet Pipe (Accumulator)  | 9372879016   |           |
| 46       | Compressor Assy                | 9372558034 |           | 815-3    | Terminal-8P               | 9358660119   |           |
| 51       | M5 Nut Special                 | 9300301015 |           | 817      | Bracket (Thermo)          | 9372643013   |           |
| 54       | Condensing Pipe                | 9372024027 |           | 823-2    | Fuse Holder               | 0500063024   |           |
| 55       | Special Nut M8                 | 9355091008 |           | 824-4    | Fuse                      | 0600222529   |           |
| 58       | Suction Pipe                   | 9372872017 |           | 867      | Accumulator Holder Rubber | 9354022010   |           |
| 64       | Cabinet Left, Painted          | 9359840022 |           | 983      | Thermostat Cover          | 9358274002   |           |
| 82-1     | Check Joint                    | 9372802014 |           | 989-1    | Cord Clamp-A              | 9359822011   |           |
|          |                                |            |           | 989-2    | Cord Clamp-B              | 9359823018   |           |

When you order parts, please make a photocopy of this page and fill the number of the parts in the "Order" column.


| Ref. No. | Description                    | Part No.   | Ord. Q'ty | Ref. No. | Description               | Part No.     | Ord. Q'ty |
|----------|--------------------------------|------------|-----------|----------|---------------------------|--------------|-----------|
|          |                                | RO-30UB    |           |          |                           | RO-30UB      |           |
| 2        | Fan Cover (Guard)              | 9371187013 |           | 107      | Rubber Mount              | 9351049010   |           |
| 4        | Emblem-Rear "FUJI"             | 9361328006 |           | 109      | Terminal Cover            | 9371511016   |           |
| 5        | Cabinet-A, Painted             | 9359797029 |           | 117-3    | Hex. Nut w/Sp. Washer     | 301721180114 |           |
| 8        | Comp Wire                      | 9370945072 |           | 187      | Clamp No. 1219            | 313361271706 |           |
| 9        | Cabinet-B, Painted             | 9359798026 |           | 218-3    | Power Relay               | 9900074012   |           |
| 12       | Base Assy, Painted             | 9359813019 |           | 263      | Accumulator               | 9385005006   |           |
| 13       | 3-Way Valve (5/8)              | 9372205037 |           | 272      | Strainer                  | 9369287008   |           |
| 13-2     | 3-Way Valve (3/8)              | 9372204047 |           | 328      | Comp Plate Assy           | 9362273060   |           |
| 16       | Condenser Assy                 | 9369981005 |           | 342      | Screw (Solenoid Valve)    | 9970024016   |           |
| 18       | Inlet Pipe (Condenser)         | 9372185049 |           | 343      | Solenoid                  | 9900196011   |           |
| 18-1     | Inlet Pipe (Condenser) B       | 9372878019 |           | 344      | 4-Way Valve               | 9900163013   |           |
| 20       | Discharge Pipe Assy            | 9372873014 |           | 373      | Grip                      | 9352157004   |           |
| 26       | Comp. Cover                    | 9369093005 |           | 407      | Clamp (Cable) No. 1259    | 313739340109 |           |
| 29       | Separate Wall                  | 9359804017 |           | 412      | Terminal Gasket           | 9371512013   |           |
| 32       | Control Box Metal              | 9359839019 |           | 420      | Capillary Assy            | 9371287102   |           |
| 34       | Capacitor (Fan Motor)          | 9357965024 |           | 477      | Bell-Mouth                | 9359809012   |           |
| 37       | Running Capacitor              | 9703107092 |           | 527      | Protection Net            | 9359844013   |           |
| 38       | Capacitor Clamp                | 9351770013 |           | 653-1    | Cup Screw                 | 9385089020   |           |
| 39       | Propeller Fan Assy             | 9359837015 |           | 734      | Cabinet Top Panel         | 9359799023   |           |
| 41       | Fan Motor Assy-Out (MFB-30DFT) | 9600832011 |           | 735      | Distributor Assy          | 9369076008   |           |
| 45-3     | Motor Bracket-A                | 9369627002 |           | 754      | Gasket Washer             | 9351053017   |           |
| 45-4     | Motor Bracket-B                | 9369628009 |           | 772      | Joint Pipe (Valve)        | 9372876015   |           |
| 45-5     | Motor Bracket-C                | 9369629006 |           | 808      | Inlet Pipe (Accumulator)  | 9372875018   |           |
| 45-6     | Motor Bracket-D                | 9369630002 |           | 815-3    | Terminal-8P               | 9358660119   |           |
| 46       | Compressor Assy                | 9372558034 |           | 823-2    | Fuse Holder               | 0500063024   |           |
| 51       | M5 Nut special                 | 9300301015 |           | 824-4    | Fuse                      | 0600222529   |           |
| 54-1     | Condensing Pipe-A              | 9372024027 |           | 867      | Accumulator Holder Rubber | 9354022010   |           |
| 55       | Special Nut M8                 | 9355091008 |           | 989-1    | Cord Clamp-A              | 9359822011   |           |
| 58       | Suction Pipe                   | 9372872017 |           | 989-2    | Cord Clamp-B              | 9359823018   |           |
| 64       | Cabinet Left, Painted          | 9359840022 |           |          |                           |              |           |
| 81       | Strap                          | 9362371001 |           |          |                           |              |           |
| 82-1     | Check Joint                    | 9372802014 |           |          |                           |              |           |
| 83       | Check Joint Bracket            | 9359807025 |           |          |                           |              |           |
| 84       | Valve Cover                    | 9359817017 |           |          |                           |              |           |
| 85       | Valve Fixing Plate             | 9359806011 |           |          |                           |              |           |

# STANDARD ACCESSORIES

## INDOOR UNIT ACCESSORIES

| Name and Shape                                                                                                             | Part No.                                                         |
|----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| Wall hook bracket<br>                     | 9367987009                                                       |
| Remote control unit<br>                   | 9371190020<br>(AR-JW2)<br>[Cool model]                           |
|                                                                                                                            | 9371190013<br>(AR-JW1)<br>[Heat & Cool model]<br>(Reverse cycle) |
| Battery (penlight)<br>                    | 0600185534                                                       |
| Remote control unit holder<br>            | 9305642014                                                       |
| Tapping screw (big)<br>(φ 4 x 20)<br>    | 301141164200                                                     |
| Tapping screw (small)<br>(φ 3 x 12)<br> | 301141533125                                                     |

## OUTDOOR UNIT ACCESSORIES (18,000 24,000BTU model)

| Name and Shape                                                                                   | Part No.                                                   |
|--------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| Drain Assy<br> | 9303029015<br>[Heat & Cool model<br>(Reverse cycle)only]   |
| Drain cap<br>  | 313166024302<br>[Heat & Cool model<br>(Reverse cycle)only] |

## OUTDOOR UNIT ACCESSORIES (30,000 BTU model)

| Name and Shape                                                                                      | Part No.                                                   |
|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| Cable clip<br>    | 313739340109                                               |
| Tapping screw<br> | 301463040100                                               |
| Drain pipe<br>   | 9303029015<br>[Heat & Cool model<br>(Reverse cycle)only]   |
| Drain cap<br>   | 313166024302<br>[Heat & Cool model<br>(Reverse cycle)only] |

